




1550nm high power DFB Laser Module

Model: OC455XX Series

Features

- 14 PIN Butterfly Package
- Output optical power up to 90 mW
- SMSR > 35 dB
- Qualified as per intent of Telcordia GR-468
- RoHS

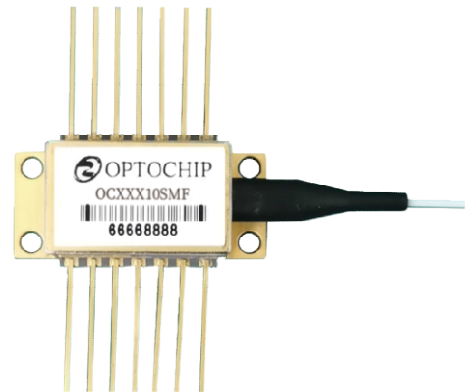

Description

Optochip's OC455XX Series laser is 1550nm high power DFB Laser Module. The module has built-in components such as TEC, thermistor, MPD and optical isolator. With the advantages of high output power, and high reliability, it is suitable to be used as a light source or in the field of optical fiber sensing.

Applications

- Test and measurement
- Laser source
- Optical Fiber Sensing
- DWDM



Absolute Maximum Ratings

Stresses in excess of the absolute maximum ratings can cause permanent damage to the device.


Parameter	Symbol	Min	Typ	Max	Unit
Storage Temperature	Ts	-40		85	°C
Relative Humidity	RH	5		85	%
LD Forward Voltage	V			2	V
LD Reverse Voltage	Vr			2	V
LD Forward Current	If			400	mA
MPD Reverse Voltage	VMPDR			10	V
TEC Current	ITEC			1.2	A
TEC Voltage	VTEC			3.5	V
ESD(HBM)	ESD		500		V

Optical/Electrical Characteristics(Tc=25°C)

Parameter	Symbol	Min	Typ	Max	Unit
Threshold Current	Ith		15	25	mA
Operating Voltage	Vop		1.5		V
Operating Current	Iop			300	mA
Output Optical Power	Po		70	90	mW
Monitor Operating Current	Im	10		200	μA/mW
Center Wavelength	λ		1550		nm
Side-Mode Suppression Ratio	SMSR	35	40		dB
Relative Intensity Noise	RIN		-140		dB/Hz
Thermistor Resistance	Rth		10		kOhm
Thermistor Sensitivity Index	β		3892		K



Outline Drawing

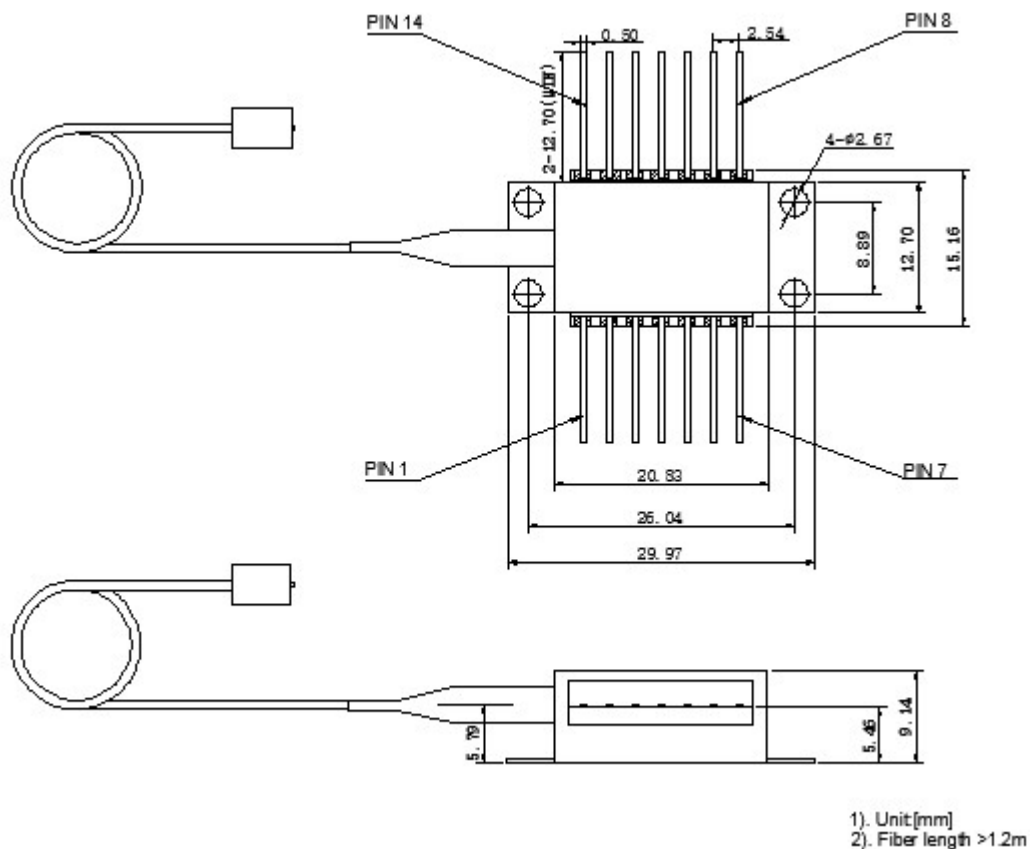


Connection

Pin Assignments			
Pin	Function	Pin	Function
1	Thermistor	8	Case Ground
2	Thermistor	9	Case Ground
3	LD (-)	10	NC
4	MPD ANODE	11	LD (+)
5	MPD CATHODE	12	LD (-)
6	TEC (+)	13	LD (+)
7	TEC (-)	14	NC



Ordering information

e.g.: O C 4 5 5 0 S M F

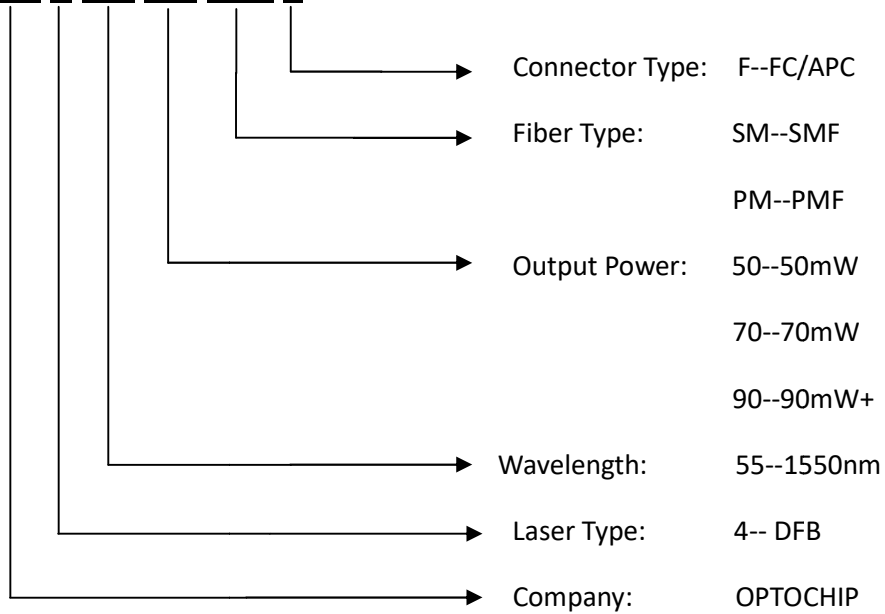

Contact us

Address: B120, Block C, Qilu Software Park, No.1 Shunhua Road, Jinan High-tech District, Shandong Province, CN

Sales Manager: Mr Li

Tel: +86 0531-88761553

Email: Guoqing.li@optochip.cn