

■ 3D Holographic Fan User Manual (P65/P80S)

Please read this manual carefully before using the device.


- Please make sure to secure it in a safe place to prevent it from falling off.
- Do not touch the fan blades during rotation.
- Do not disassemble the equipment without authorization to avoid causing equipment abnormalities.
- Avoid exposure to high temperatures or humid environments, and avoid outdoor use on rainy days.
- Pay attention to maintenance and regularly clean the equipment

■ Parameters and Lists

Model	P65	P80S
Resolution	1280*1280	1280*1280
Area	65*65*3.2cm	77*77*3.4cm
LED (pieces)	1280	1280
Storage	8G	8G
Voltage/Power	DC 24V~26V / 48W~96W	DC 24~26V / 55W~96W
uploader	APP、PC、Cloud	APP、PC、Cloud
Multi-screen	☒ wired ☒ wireless	☒ wired ☒ wireless
Audio	☒ Music module ☒ Bluetooth	☒ Music module ☒ Bluetooth
Work-temperature	-15℃—50℃	-15℃—50℃
Warranty/lifespan	one year/>30000 hours	one year/>30000 hours
Featured Features	☒ Collision ☒ Wired control ☒ Upgrade ☒ No ghosting ☒ Multi tone ☒ Multi speed	☒ Collision ☒ Wired control ☒ Upgrade ☒ No ghosting ☒ Multi tone
Part Lists	3D Hologram Fan *1, Fan blade *4, Adaptor *1, Remote Controller *1, Wall-mounting Part *1, Setscrews *1, screwdriver *1, User Manual *1, Certification Card *1, Warranty Card*1	

■ Installation

1. Tighten the Wall-mounting part onto the back of device with two small screws.
2. Take out the fan body and blades. **Put blade A in position A and Screw, Put blade B in position B and Screw.**
3. Hang the device to the fixed par. Tighten all screws to complete the installation.

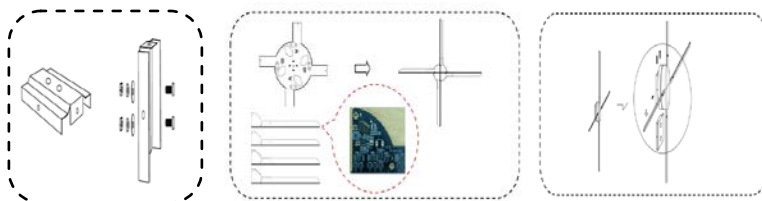


■ Remote control

The remote control needs to be paired with the device for the first time, and the pairing method can be selected from the following methods.

- Press the match button on the back of the device, and when the breathing light turns green, press the "match" button on the remote control. The breathing light flashes green to complete pairing.
- Connect the mobile app to the device, go to Settings ->Advanced Options, click "Remote Control Matching", and press the remote control "match" button when the breathing light is green. The breathing light flashes green to complete pairing.
- After pressing the "match mode" button on the remote control, when the device's breathing light turns green, press the "match" button on the remote control

Please pull out the PVC insulation sheet before use, in order not to waste the battery, when not in use, please plug back the PVC insulation sheet. If you need to install or replace the battery, please follow the instructions on the back of the remote control to remove the battery clip, insert the CR2025 battery and reinsert it.

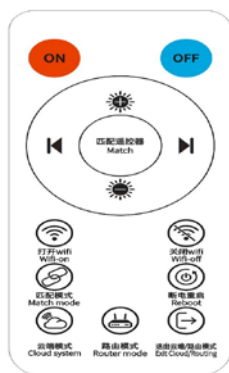

ON: Run the Fan **OFF:** Stop to run the fan

Match mode: Put the device into remote pairing mode for 10 seconds

Match: Press to match when the Fan is in matching mode

Wifi-on: The hotspot is visible and can be connected when opened

Wifi-off: The hotspot is invisible and cannot be connected when off

Reboot: Restart the device system .

Cloud system: Enter cloud mode.

Route mode: Enter routing mode to upload videos for splicing

Exit Cloud/Routing: Exit cloud and routing mode.

■ Control with mobile

Download URL: <http://down.holocloud.online>

IPhone (App Store) search for :3D Magic

It can be downloaded APP by scanning the QR code



Turn on the wireless function of the phone and connect to the device's WIFI. Open the app, select the standalone, and the device will automatically connect. *(The same device can only have one terminal connected at a time. The WIFI of the device is like CS_ XXX_ XXXXXX, password CS123456. If the app cannot be connected, check if the app is the latest version. At the same time, the required permissions need to be enabled such as location and storage.)*



On/Off: Click to switch the device on or off.

Upload: Click to upload images or videos.

Edit: (1) Delete (2) Rename (3) Sort - Hold down a video and drag it to a new position (4) Hide - Hidden videos will not be played (5) Modify the times - it will be played according to the set number of times, only effective in sequential playback mode.


Switch: When the device is turned on, click on the video to play it.

Play/Pause: Click on the right of video to switch between play and pause.

Settings: Enter the settings interface.

■ Control with computer (Only supports Windows)

Open web page <http://down.holocloud.online> Download the software and install it. Open the software after connecting the device WIFI to the computer.

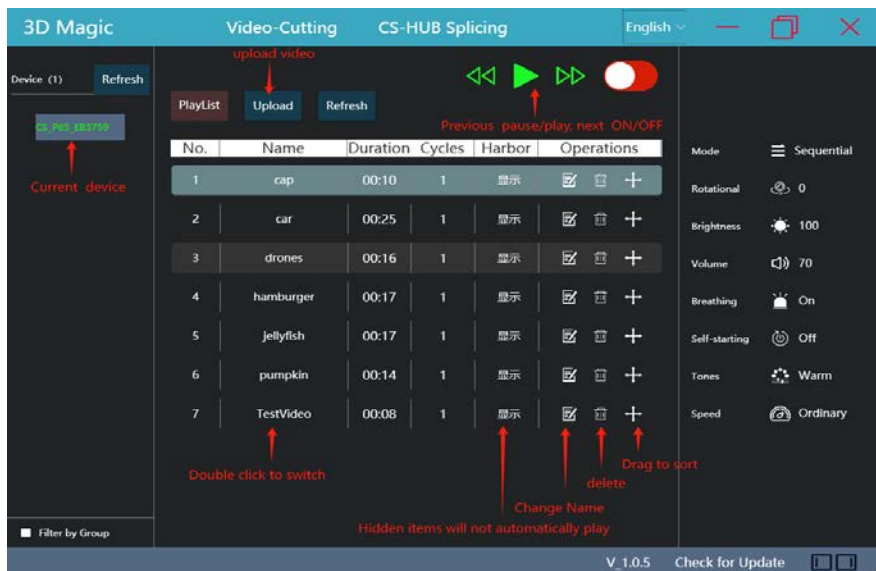

■ Control with cloud

- (1) Before using services, register a cloud account. (address: <https://www.holocloud.online/>)
- (2) The device needs to be configured through a mobile app to connect to cloud. After connecting the mobile to the device, go to: Settings ->Remote Control



- Cloud Long Connection: It will not automatically exit cloud mode due to network unavailability or other reasons
- Servers: You can choose between Chinese or European servers
- WIFI name: The WIFI name used to connect to the cloud (only supports the 2.4G frequency band)
- WIFI password: The password of WIFI used to connect to the cloud
- Bind cloud account: The devices will connect to the cloud and automatically bind to the cloud account

After completing the above information, click "Device Connect to Cloud".

- (3)After logging in the cloud and waiting for the device online, you can control the device and upload videos through the cloud platform.

By any of the following methods, the device can exit cloud mode and its WIFI can be restored to visibility.

A) Press the "Exit Cloud/Router" button on the remote control to exit cloud mode. B) Click the "Net" button on the back of the device to exit cloud mode. C) Alternatively, you can click "disconnect" on the cloud page to exit the device from the cloud.

■ Audio output


- (1) Play sound by connecting to Bluetooth

After connecting the fan, open the APP: "Setup"->"Toggle Bluetooth". After Bluetooth is turned on the fan will automatically scan the surrounding Bluetooth. Select the Bluetooth from the scanned Bluetooth list, click "Confirm" to connect. After successful connection, sound can be output through Bluetooth.

- (2) Play the sound through the music module.


A. Connect the computer and music module with the USB data cable, select your favorite music on the computer, and put it into the removable disk 01 folder directory of the audio module. Naming rules: For example, the name of conquest.mp3 is 001_conquest.mp3, indicating that the first video corresponds to the audio 001_conquest

B. Connect equipment and sound devices (devices connected music module input, music module output connection audio equipment) as below, can play sound through music module.

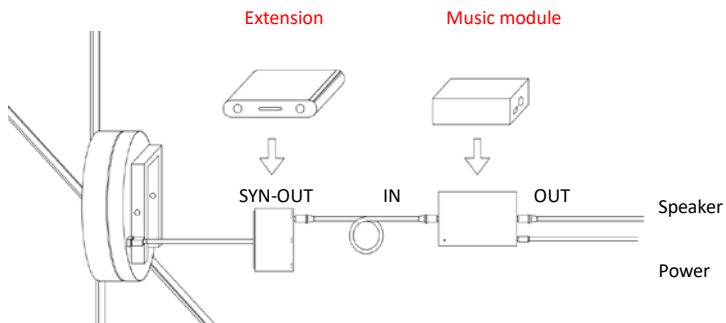


■ Controlled with wired module

Connect the wired control module and equipment as shown in the figure below (the wire control output is connected to the SYN-IN of device), the device can be controlled to turn on/off or video switching through the wire control module. (Specific functions are determined according to the remote control program)

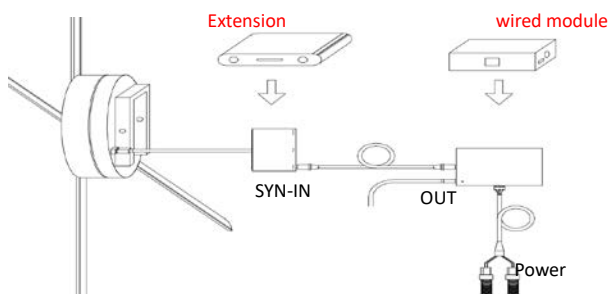

■ Multi-screen

Taking 2X2 (consisting of 4 devices in 2 rows and 2 columns) screen connection as an example. Fix the wall fittings according to the spacing, and add shims to the first one (1-1) to raise it, without raising it in adjacent positions, and so on. The device supports any of the following methods for screen splicing.

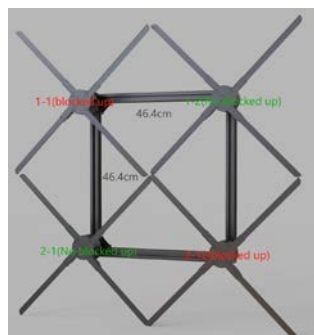

Different Fan different spacing

P65 – 46.4cm ; P80S – 55cm




Blocked up



No blocked up

1. Use CS-HUB box for Multi-screen


- The fan is sequentially connected to port 1, 2, 3, 4 of box from top to bottom, left to right
- CFG connects to computer USB via type-c data cable
- Use 24-26V DC power to power for the HUB

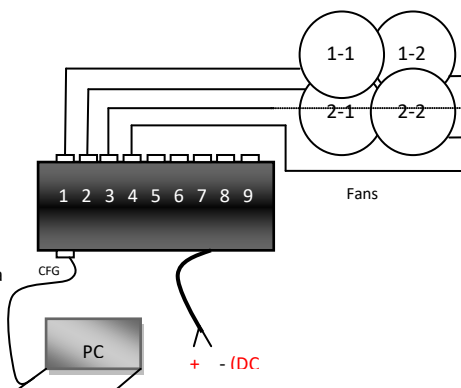

After connecting, power on and wait for the device's LED light to light up. Open the 3DMagic software on your computer and click on "CS-HUB Splicing" above. After input width and height (in this case, the width is 2 and the height is 2), click to "Configure". If the port number is empty, please check if the computer has a device driver installed. If the configuration fails, you can click on "Problem Diagnosis" to see if the device is flashing green. If a device does not flash, it indicates that there is a problem with the corresponding device or interface. After successful configuration, the IN of the box can be connected to a wire control module for control, and the OUT can be connected to a music module to output sound.

When there are more than 9 Fans to Multi-screen, multiple boxes need to be connected in series. Use audio cables to connect the OUT of the first box to the IN of the second box; The OUT of the second box is connected to the IN of the third box... The OUT of the last box is connected back to the IN of the first box.

2. Use Extension for Multi-screen

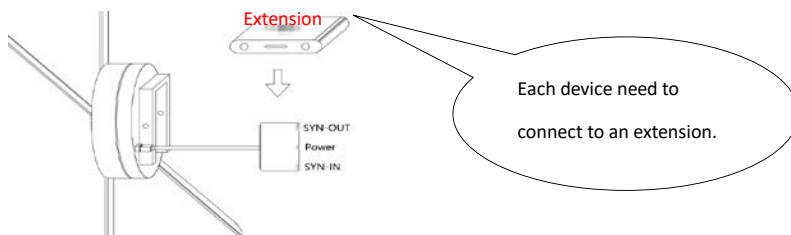

(1) The SYN OUT of devices 1-1 is connected to the SYN IN of devices 1-2, the SYN OUT of devices 1-2 is connected to the SYN IN of devices 2-2, the SYN OUT of devices 2-2 is connected to the SYN IN of devices 2-1, and finally the SYN OUT of devices 2-1 is connected to the SYN IN of devices 1-1.

(2) After all the devices is powered on, selected one device is as the host (1-1 is selected in this example). connect the device to the APP, enter: Settings ->Advanced Options, and click the right button of "Network Control". If the green LED of the fan blade flashes and turns into a normal breathing light, the networking is successful; If

the green light flashes to the red light flashes, the networking fails. At this point, it is necessary to check if all connections are correct, and then resend the networking control request until the networking is successful.

3. Wireless synchronization

Plugged into wireless module and powered on. Press the remote control "Route mode" or double-click the "MODE" button on the device to enter routing mode. Computer or mobile phone connection to CS_Box, select "Wireless" for screen configuration, and follow the prompts to complete the configuration.

■ Upload videos and control for Multi-screen

Press the remote control "Route mode" or double-click on the host "MODE", and all devices will enter routing mode. At this time, you can control and upload videos after the computer or phone is connected to CS_Box. When in routing mode, the device WIFI is not visible. You can press remote control "Exit Cloud/Routing" or double-click "MATCH" on the back of the host to exit routing mode. (Uploading videos requires physical location of the device. Extensions Multi-screen requires software splicing and configuration before uploading. When using CS-HUB and wireless synchronization, location writing is done during network configuration. In this case, you can directly upload videos in routing mode.)

■ Troubleshooting

1. After connecting the power, the blade does not light up

Solution: Check the power supply and if the circuit is normal; Is the device's breathing light turned off.

2. Rotating display colored circles

Solution: Check if the installation of the fan blades compact . Stop running and check if the LED is damaged.

3. Unable to start rotation

Solution: Check if the device is powered on or the device is in a slave or emergency stop state, and can be switched to the host. After powering off the power, the emergency stop is lifted and the power is restored.

4. Unable to search for device WIFI

Solution: Routing mode and cloud state WIFI are not visible. If WIFI is turned off, press and hold the remote control WIFI-on or long press the Net button on the back of the device for 5 seconds to turn on WIFI.