




## iG-10Mini

10W guitar amplifier

User manual

English

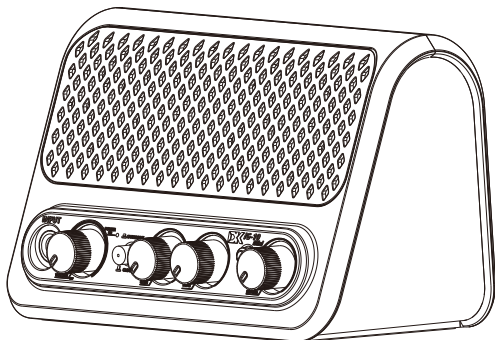

### Product parameters

Rated power: 10W

Peak power: 20W

Speaker: Full frequency 1.75" \* 5W \* 2;

Charge: USB-Type-C DC5V 1000mA;

Battery: 3.7V 2000mAh lithium battery;

Instruments: 1/4" socket;

S/N: 90dB;

INR: 1 Mohm;

TONE frequency range: 125-6.5KHz + 8dB

Frequency response: 40Hz-16KHz;

Effect: Clean, Overdrive, Reverb;

AUX IN: 3.5 jack;

S/N: 95dB;

INR: 10kohm;

Bluetooth: V5.0 version, barrier free effective distance 15m

Phones: 3.5mm socket (MONO)

Charging time: 2H;

Endurance time: ~4-6H;

Package size: L160 \* W105 \* H110mm

N.W: 400g

G.W: 450g

### Product features



(1) **INPUT**: used to connect guitar audio cables;

(2) **POWER switch/VOLUME**: Rotate clockwise to 35 degrees to turn on, continue to rotate to adjust guitar volume; Turn counterclockwise to 30 degrees to shut down;

(3) **Power/Charging LED**: The LED flashes during charging, and it is always on when it is fully charged or turned on without charging.

(4) **Overdrive/Clean switch**: Bounce is CLEAN, press down is OVERDRIVE;

(5) **Gain**: can adjust the gain size of the guitar input;

(6) **Tone**: clockwise treble enhancement, counterclockwise bass enhancement;

(7) **Bluetooth**: Long press to turn on/off, tap to play/pause Bluetooth music (volume not controlled by (2));

(8) **Reverb**: used to adjust the reverb size of the guitar channel;

(9) **AUX IN**: audio input for mobile phones, computers, etc; (This volume is not controlled by the (2) knob);

(10) **Phones**: Automatically disconnect speaker output when inserting headphones;

(11) **Charging IN**: Use USB devices such as mobile phone chargers, computers, and power banks to charge.

When charging, (3) the red light will turn on, and when fully charged, the red light will turn off;

### Packaging details

1. One iG-10Mini amplifier;
2. One charging cable USB--Type-C;
3. One user manual;

