

快速使用教程

1. 开机及校准



分光测色仪

使用说明书

产品介绍

使用产品前请仔细阅读本说明书, 并妥善保管




主机




校准充电底座


2. 如何测色差




开机




将仪器放到校准底座进行白校准




将仪器放到黑校准盒上进行黑校准



测标准




切换到色差测量界面



测样品, 得出色差

3. 关机



长按3秒

| | |
|-----------------------------------|--|
| 测量结构※ | D/8,SCI+SCE |
| SCI+SCE同时测量 | 支持 |
| 一体式物理定位孔 | 支持 |
| 测量重复性※※ | dE*ab≤0.02 |
| 显示精度 | 0.01 |
| 照明光源 | 全波段均衡LED光源 |
| 口径 | Φ11mm |
| 测量指标 | 光谱反射率,CIE-Lab,CIE-LCh,HunterLab,CIE-Luv,XYZ,Yxy,RGB 色差(ΔE*ab,ΔE*cmc,ΔE*94,ΔE*00), 白度 (ASTME313-00,ASTME313-73,CIE,ISO2470/R457,AATC-C,Hunter,TaubeBerger Stensby)黄度(ASTM D1925,ASTM E313-00,ASTM E313-73)黑度(My,dM),沾色牢度,变色牢度,Tint(ASTM E313-00)色密度CMYK(A,T,E,M),同色异谱指数Milmm,孟塞尔,遮盖力,力份(染料强度,着色力) |
| 光源条件 | A,B,C,D50,D55,D65,D75F1,F2,F3,F4,F5,F6,F7,F8,F9,F10,F11,F12CW-F,U30,U35,DLF,NBF,TL83,TL84,ID50,ID65,LED-B1,LED-B2,LED-B3,LED-B4LED-B5,LED-BH1,LED-RGB1,LED-V1,LED-V2 |
| 软件支持 | Andriod,iOS,Windows,微信小程序,鸿蒙 |
| 准确性保证 | 保证计量合格 |
| 视场角 | 2°, 10° |
| 积分球直径 | 40mm |
| 符合标准 | CIENo.15,GB/T3978,GB2893,GB/T18833,I-SO7724-1,ASTME1164,DIN5033Teil7 |
| 分光方式 | 高精度纳米分光器件 |
| 感应器 | 硅光电二极管阵列双16组 |
| 波长间隔 | 10nm |
| 波长范围 | 400-700nm |
| 反射率测定范围 | 0-200% |
| 反射率分辨率 | 0.01% |
| 测量时间 | 约1秒 |
| 接口 | USB, 蓝牙 |
| 屏幕 | 全彩屏幕, 3.5英寸 |
| 电池容量 | 单次充电可连续测量8000次, 7.2V/3000mAh |
| 光源寿命 | 500万次 |
| 语言 | 简体中文, 英语 |
| 存储 | 仪器: 10000条; APP: 海量存储 |
| 体积 | 178mm*73mm*108mm |
| 重量 | 约680g |
| ※漫射照明/8°方向接收, 包含镜面反射光/去除镜面反射光 | |
| ※※白板校准后以5秒间隔测量白板30次以MAV口径测量结果标准偏差 | |

保修说明

本产品售后服务严格依据《中华人民共和国消费者权益保护法》、《中华人民共和国产品质量法》实行售后三包服务, 服务内容如下:

1、自您签收日起7日内, 本产品出现《产品性能故障表》所列性能故障的情况, 经由本司售后服务中心检测确定, 可免费享受退货或换货服务;

2、自您签收日起8-15日内, 本产品出现《产品性能故障表》所列性能故障的情况, 经由本司售后服务中心检测确定, 可免费享受换货或维修服务;

3、由您签收日起至保修期结束, 本产品出现《产品性能故障表》所列性能故障的情况, 经由本司售后服务中心检测确定, 可免费享受维修服务。

提示信息

因运输过程中需用包装箱保证产品运输安全, 建议自签收日起至少保留包装箱30天。

非保修条例


- 1、未经授权的维修、误用、碰撞、疏忽、滥用、进液、事故、改动、使用非本产品配件, 或撕毁涂改标签、防伪标记;
- 2、已超过三包有效期;
- 3、因不可抗力造成的破坏;
- 4、不符合《产品性能故障表》所列性能故障的情况;
- 5、因人为原因导致非本产品及其配件产生《产品性能故障表》所列性能故障。

警告

- 请勿尝试拆卸或更换仪器内部零件, 如需服务请联系代理商或官方客服。
- 请勿将仪器放置于热源或直接暴露在炉火旁。
- 若任何液体不小心进入仪器, 请立即关闭仪器电源。
- 本产品及内部零件, 如被儿童误食可能导致窒息等危险。

性能故障表


| 名称 | 性能故障 |
|-------|---|
| 分光测色仪 | 1、电源指示灯不亮(电池没电除外); 2、仪器开关卡滞, 不能正常开关; 3、仪器显示器无法正常显示; 4、测量光源不亮; 5、蓝牙无法连接。 |

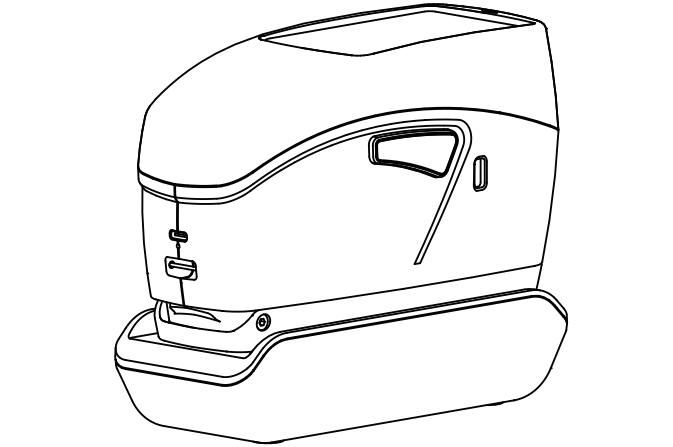

Spectrophotometer Operation instruction


Product introduction

Please read this manual carefully before using the product.

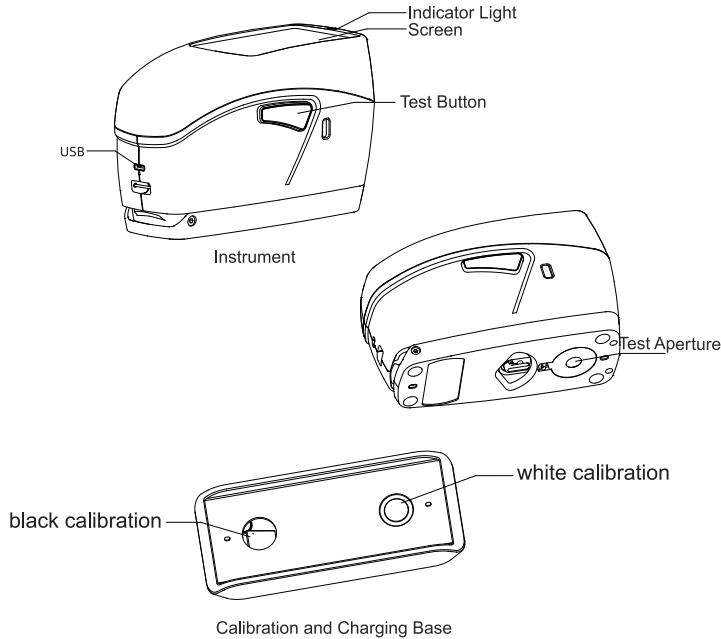


Quick Start


1. Power on and Calibration

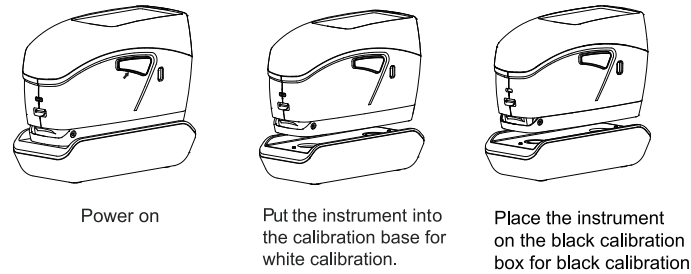

2. How to measure color difference

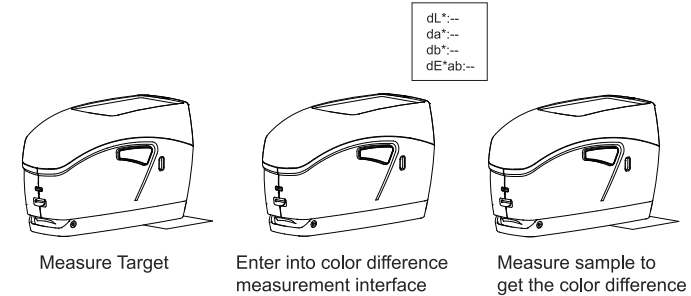

3. Power off



Parameters

| | |
|---------------------------------------|--|
| Measurement structure※ | D/8,SCI+SCE |
| SCI+SCE simultaneous measurement | support |
| Integrated physical positioning holes | support |
| Measurement Repeatability※※ | dE*abs0.02 |
| Display accuracy | 0.01 |
| lighting source | Full-band balanced LED light source |
| caliber | Φ11mm |
| measurement standard | Spectral reflectance, CIE-Lab, CIE-LCh, HunterLab, CIE-Luv, XYZ, Yxy, RGB color difference (ΔE*ab, ΔE*cmc, ΔE*94, ΔE*00), whiteness (ASTME313-00, ASTM E313 -73, CIE, ISO2470/R457, AATCC, Hunter, TaubeBerger Stensby) yellowness (ASTM D1925, ASTM E313-00, ASTM E313-73) blackness (My, dM), stain fastness, color fastness, Tint (ASTM E313-00) Color density CMYK (A, T, E, M), metamerism index Milm, Munsell, hiding power, strength (dye strength, tinting strength) |
| Light source conditions | A,B,C,D50,D55,D65,D75F1,F2,F3,F4,F5,F6,F7,F8,F9,F10,F11,F12CW F,U30,U35,DLF,NBF,TL83,TL84,ID50,ID65,LED-B1,LED-B2,LED-B3,LE D-B4LED-B5,LED-BH1,LED-RGB1,LED-V1,LED-V2 Andriod, iOS, Windows, WeChat applet, Hongmeng |
| software support | Ensure measurement is qualified |
| Accuracy guaranteed | 2°, 10° |
| field of view | 40mm |
| Integrating sphere diameter | CIENo.15,GB/T3978,GB2893,GB/T18833,ISO7724-1,ASTME1164,- |
| Standards compliant | DIN5033Teil7 |
| | High-precision nano spectroscopic device |
| Spectral method | Silicon photodiode array dual 16 groups |
| sensor | 10nm |
| wavelength interval | 400-700nm |
| Wavelength range | 0-200% |
| Reflectivity measurement range | 0.01% |
| Reflectance resolution | about 1 second |
| measure time | USB, Bluetooth |
| interface | Full color screen, 3.5 inches |
| Screen | Can continuously measure 8000 times on a single charge, |
| battery capacity | 7.2V/3000mAh |
| Light source life | 5 million times |
| language | Simplified Chinese, English |
| storage | Instrument: 10,000 items; APP: Mass storage |
| volume | 178mm*73mm*108mm |
| weight | About 680g |

※ Diffuse lighting/8° direction reception, including specular reflected light/removing specular reflected light

※※ After whiteboard calibration, measure the whiteboard 30 times at 5-second intervals and measure the standard deviation of the results with MAV caliber.

Warranty

Reminder

It is recommend that keep the packing box for at least 30 days as the packing box is required to ensure the safety of transportation.

Non warranty regulations

- 1.Unauthorized repair,misuse,accident,modification,use of nonofficial accessories.
- 2.Instrument is out of warranty.
- 3.Damage caused by force.
- 4.Not the performance failure listed in the product performance failure table.
- 5.Performance failure caused by human factors.

Warning

- .Do not attempt to disassemble or replace any part of the equipment. Please contact the agent or official customer service for after sales service.
- .Do not place the equipment near heat source or directly expose to the fire.
- .If any liquid enters the equipment,please power off the equipment immediately.
- .This product contains small parts.It may cause suffocation and other hazards,if swallowed by children.

Product Performance Failure Table

| Name | Performance failure |
|-------------------|--|
| Spectrophotometer | 1.The equipment can't power on. 2.The equipment's button can't work normally. 3.Equipment screen fails to work normally. 4.Equipment lamp fails to work normally. 5.Bluetooth can't connect. |