



planetary[®]
行星照明集团

亿智顺[®]
Wisdom shun

LED产品目录
2020版



行星照明（深圳）集团有限公司

手机: 13751150321
电话: 0755-36960879
邮箱: info@planetarylighting.com
官网: www.planetarylighting.com
地址: 深圳市龙岗区平湖街道5号1D090

扫一扫进入官网




行星照明（深圳）集团有限公司

只因专注，所以专业。



Planetary Lighting (Shenzhen) Group Co., Ltd. is located in Shenzhen, Guangdong Province, China, mainly engaged in the production and sales of intelligent lighting. Integrated services, well-known manufacturing companies in the R&D, manufacturing and sales of lighting products, LED lighting, LED panel lights, LED downlights, LED spotlights, LED ceiling lights are mainly suitable for smart home lighting, indoor lighting, Commercial lighting, hotel lighting, the main market in the national and European markets, the company in the 'customer first, Quality-oriented principle, work together for a win-win situation! Official website: www.yzshun.com, www.wisdomshun.com, Tel: 0755-36960879 E-mail: info@yzshun.com



LED Lighting
Manufacturers

Products Catalogue


| | |
|----------------------------|-------|
| LED Bulb light..... | 01-04 |
| LED Small Panel light..... | 05-06 |
| LED Strips light..... | 07-08 |
| LED Downlight..... | 09-14 |
| LED Panel light | 15-16 |
| UFO highbay light..... | 17-18 |
| LED Driver..... | 19-20 |

Energy saving * Safety * Smart * Assured * Durable

YZS-DW-COB-7W



7W




Light Source
EPISTAR



YZS-DW-SMD-3W



7W




Light Source
EPISTAR



YZS-DW-PZZ-12W




12W



Light Source
EPISTAR



YZS-DW-SH-3W




Light Source
EPISTAR



| Model No. | Power | Voltage | CCT | Flux | Dimension | LED | Beam Angle | Life Span |
|----------------|-------|------------|------------|--------|-------------|-----|------------|------------|
| YZS-DW-COB-7W | 7W | AC85V-260V | 2700-7500K | 770Lm | Φ110*80mm | COB | 24° | ≥30,000hrs |
| YZS-DW-COB-12W | 12W | AC85V-260V | 2700-7500K | 1320Lm | Φ110*100mm | COB | 24° | ≥30,000hrs |
| YZS-DW-PZZ-12W | 12W | AC85V-260V | 2700-7500K | 1320Lm | Φ95*H108mm | COB | 24° | ≥30,000hrs |
| YZS-DW-PZZ-18W | 18W | AC85V-260V | 2700-7500K | 1980Lm | Φ110*H120mm | COB | 24° | ≥30,000hrs |

| Model No. | Power | Voltage | CCT | Flux | Dimension | LED | Beam Angle | Life Span |
|---------------|-------|------------|------------|-------|-----------|------|------------|------------|
| YZS-DW-SMD-3W | 3W | AC85V-260V | 2700-7500K | 270Lm | Φ100*45mm | 2835 | 120° | ≥30,000hrs |
| YZS-DW-SMD-7W | 7W | AC85V-260V | 2700-7500K | 630Lm | Φ120*60mm | 2835 | 120° | ≥30,000hrs |
| YZS-GG-SH-3W | 3W | AC85V-260V | 2700-7500K | 270Lm | Φ95*30mm | 2835 | 120° | ≥30,000hrs |
| YZS-GG-SH-7W | 7W | AC85V-260V | 2700-7500K | 630Lm | Φ120*30mm | 2835 | 120° | ≥30,000hrs |

YZS-DW-SD-3W




3W



Chip

45mil



Light Source
EPISTAR



YZS-DW-SD-6W




6W



Chip

45mil



Light Source
EPISTAR




| Model No | Power | Voltage | LED | CCT | Flux | Dimension | Beam Angle | Life Span |
|---------------|-------|------------|------|------------|--------|-----------|------------|------------|
| YZS-DW-SD-3W | 3W | AC85V-260V | 5050 | 2700-7500K | 300Lm | Φ85x25mm | 12° | ≥30,000hrs |
| YZS-DW-SD-6W | 6W | AC85V-260V | 5050 | 2700-7500K | 600Lm | Φ110x45mm | 12° | ≥30,000hrs |
| YZS-DW-SD-9W | 9W | AC85V-260V | 5050 | 2700-7500K | 900Lm | Φ140x45mm | 12° | ≥30,000hrs |
| YZS-DW-SD-12W | 12W | AC85V-260V | 5050 | 2700-7500K | 1200Lm | Φ140x45mm | 12° | ≥30,000hrs |



应用场景 Case scenario







| Model No. | CCT | Power | Voltage | Light Source | Package | Flux | Beam Angle | Life Span |
|---------------|------------|-------|---------|--------------|----------|--------|------------|------------|
| YZS-ST-AC5730 | 2700-7500K | 6w/m | AC 220V | SMD3014/5730 | 100meter | 70Lm/w | 160° | ≥30,000hrs |
| YZS-ST-AC2835 | 2700-7500K | 8w/m | AC 220V | 2835 | 100meter | 70Lm/w | 160° | ≥30,000hrs |
| YZS-ST-AC5050 | 2700-7500K | 10w/m | AC 220V | 5050 | 100meter | 70Lm/w | 160° | ≥30,000hrs |
| YZS-ST-ACRGB | RGB | 8w/m | AC 220V | 5050 | 100meter | 70Lm/w | 160° | ≥30,000hrs |



10米长，30-40厘米宽



剥去绝缘层



10厘米长，30厘米宽



220V电压，请注意安全



10-15厘米长



| Model No. | CCT | Power | Voltage | Light Source | Package | Flux | Beam Angle | Life Span |
|---------------|------------|-------|---------|--------------|----------|--------|------------|------------|
| YZS-ST-S05730 | 2700-7500K | 6w/m | AC 220V | SMD3014/5730 | 100meter | 70Lm/w | 160° | ≥30,000hrs |
| YZS-ST-S02835 | 2700-7500K | 8w/m | AC 220V | 2835 | 100meter | 70Lm/w | 160° | ≥30,000hrs |
| YZS-ST-S05050 | 2700-7500K | 10w/m | AC 220V | 5050 | 100meter | 70Lm/w | 160° | ≥30,000hrs |
| YZS-ST-S0RGB | RGB | 8w/m | AC 220V | 5050 | 100meter | 70Lm/w | 160° | ≥30,000hrs |



| Model No. | CCT | Power | Voltage | Light Source | Package | Flux | Beam Angle | Life Span |
|----------------|------------|-------|---------|--------------|---------|--------|------------|------------|
| YZS-ST-DC-IP20 | 2700-7500K | 5w/m | AC 220V | SMD3014/5730 | 5meter | 70Lm/w | 160° | ≥30,000hrs |
| YZS-ST-DC-IP65 | 2700-7500K | 5w/m | AC 220V | 2835 | 5meter | 70Lm/w | 160° | ≥30,000hrs |
| YZS-ST-DC-RGB | RGB | 5w/m | AC 220V | 5050 | 5meter | 70Lm/w | 160° | ≥30,000hrs |
| YZS-ST-DC-PK | | 5w/m | AC 220V | | 5meter | 70Lm/w | 160° | ≥30,000hrs |



应用场景 Case scenario





| Model No | Dimension | Power | Voltage | Light Source | CCT | Flux | Beam Angle | Life Span |
|----------------|-----------|-------|------------|--------------|------------|--------|------------|------------|
| YZS-PND-TR-3W | Φ85mm | 3W | AC85V~260V | SMD4014/2835 | 2700~7500K | 80Lm/w | 120° | ≥30,000hrs |
| YZS-PND-TR-6W | Φ120mm | 6W | AC85V~260V | SMD4014/2835 | 2700~7500K | 80Lm/w | 120° | ≥30,000hrs |
| YZS-PND-TR-12W | Φ170mm | 12W | AC85V~260V | SMD4014/2835 | 2700~7500K | 80Lm/w | 120° | ≥30,000hrs |
| YZS-PND-TR-24W | Φ300mm | 24W | AC85V~260V | SMD4014/2835 | 2700~7500K | 80Lm/w | 120° | ≥30,000hrs |



| Model No | Dimension | Power | Voltage | Light Source | CCT | Flux | Beam Angle | Life Span |
|----------------|-----------|-------|------------|--------------|------------|--------|------------|------------|
| YZS-PND-TQ-3W | 85x85mm | 3W | AC85V~260V | SMD4014/2835 | 2700~7500K | 80Lm/w | 120° | ≥30,000hrs |
| YZS-PND-TQ-6W | 120x120mm | 6W | AC85V~260V | SMD4014/2835 | 2700~7500K | 80Lm/w | 120° | ≥30,000hrs |
| YZS-PND-TQ-12W | 170x170mm | 12W | AC85V~260V | SMD4014/2835 | 2700~7500K | 80Lm/w | 120° | ≥30,000hrs |
| YZS-PND-TQ-24W | 300x300mm | 24W | AC85V~260V | SMD4014/2835 | 2700~7500K | 80Lm/w | 120° | ≥30,000hrs |




| Model No | Dimension | Power | Voltage | Light Source | CCT | Flux | Beam Angle | Life Span |
|----------------|-----------|-------|------------|--------------|------------|--------|------------|------------|
| YZS-PND-TQ-6W | 120x120mm | 6W | AC85V~260V | SMD4014/2835 | 2700~7500K | 80Lm/w | 120° | ≥30,000hrs |
| YZS-PND-TQ-12W | 170x170mm | 12W | AC85V~260V | SMD4014/2835 | 2700~7500K | 80Lm/w | 120° | ≥30,000hrs |
| YZS-PND-TQ-18W | 225x225mm | 18W | AC85V~260V | SMD4014/2835 | 2700~7500K | 80Lm/w | 120° | ≥30,000hrs |
| YZS-PND-TQ-24W | 300x300mm | 24W | AC85V~260V | SMD4014/2835 | 2700~7500K | 80Lm/w | 120° | ≥30,000hrs |


EASY INSTALLATION



1. Screw the holder on ceiling




2. Connect AC 220V driver



3. Hold the lamp body and tighten screws



4. Turn on the lamp checking whether it is functioning well



1. 按灯具的开孔尺寸开孔



3. 将灯具装入天花板



2. 断电后, 连接灯具电线



4. 安装完成





LED Panel light


300x300, 600x600, 300x1200



Driver

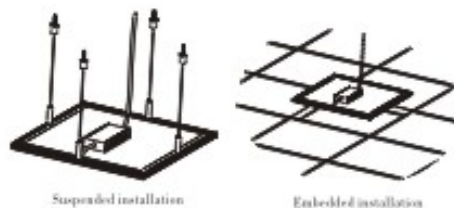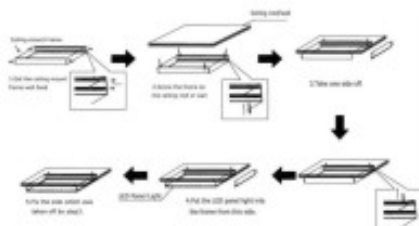

| Model No. | Dimension | Power | Voltage | Light Source | CCT | Flux | Beam Angle | Life Span |
|-------------|-----------------|-------|---------|--------------|------------|--------|------------|------------|
| YZS-PN3030 | L295xW295xH9mm | 12w | AC220V | SMD2835 | 3000-6500K | 1080lm | 120° | ≥50,000hrs |
| YZS-PN6030 | L595xW295xH9mm | 24w | AC220V | SMD2835 | 3000-6500K | 2160lm | 120° | ≥50,000hrs |
| YZS-PN12030 | L1195xW295xH9mm | 36w | AC220V | SMD2835 | 3000-6500K | 3240lm | 120° | ≥50,000hrs |
| YZS-PN6060 | L595xW595xH9mm | 36w | AC220V | SMD2835 | 3000-6500K | 3240lm | 120° | ≥50,000hrs |
| YZS-PN12060 | L1195xW595xH9mm | 72w | AC220V | SMD2835 | 3000-6500K | 6480lm | 120° | ≥50,000hrs |

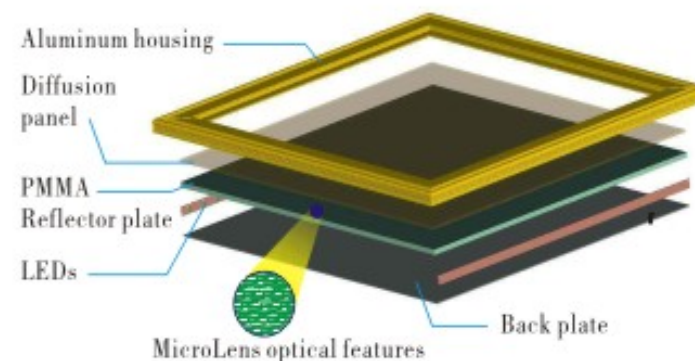



灯管安装步骤

1 LED单灯管接线示意图

PS: 先关掉电源再根据步骤安装; 电压必须为220V 常用电压



2 LED一体化灯管接线示意图




安装的时候必须确保灯体安装稳固!


3 LED一体化灯管串联示意图



注意: 18W灯管串联严禁超过3根, 9W严禁超过5根, 由此造成的损毁, 本店概不负责



| Model No. | Dimension | Power | Voltage | Light Source | CCT | Flux | Beam Angle | Life Span |
|-------------------|------------------------|------------|-------------------|---------------------|-------------------|---------------|-------------|-------------------|
| YZS-T806-U | L600xW31xH36mm | 12W | AC85V-260V | SMD3014/5730 | 2700-7500K | 920Lm | 160° | ≥30,000hrs |
| YZS-T809-U | L900xW31xH36mm | 16W | AC85V-260V | SMD3014/5730 | 2700-7500K | 1240Lm | 160° | ≥30,000hrs |
| YZS-T812-U | L1200xW31xH36mm | 20W | AC85V-260V | SMD3014/5730 | 2700-7500K | 1840Lm | 160° | ≥30,000hrs |
| YZS-T815-U | L1500xW31xH36mm | 24W | AC85V-260V | SMD3014/5730 | 2700-7500K | 2300Lm | 160° | ≥30,000hrs |

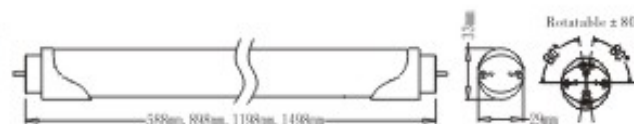

| Model No. | Dimension | Power | Voltage | Light Source | CCT | Flux | Beam Angle | Life Span |
|------------|-----------------|-------|------------|--------------|------------|--------|------------|------------|
| YZS-T806-A | L588xW29xH33mm | 12W | AC85V-260V | SMD3014/5730 | 2700-7500K | 1070Lm | 160° | ≥30,000hrs |
| YZS-T809-A | L898xW29xH33mm | 16W | AC85V-260V | SMD3014/5730 | 2700-7500K | 1540Lm | 160° | ≥30,000hrs |
| YZS-T812-A | L1198xW29xH33mm | 20W | AC85V-260V | SMD3014/5730 | 2700-7500K | 2000Lm | 160° | ≥30,000hrs |
| YZS-T815-A | L1498xW29xH33mm | 24W | AC85V-260V | SMD3014/5730 | 2700-7500K | 2550Lm | 160° | ≥30,000hrs |




| Model No. | Dimension | Power | Voltage | Light Source | CCT | Flux | Beam Angle | Life Span |
|------------|----------------|-------|------------|--------------|------------|--------|------------|------------|
| YZS-T506-U | L500xW25x35mm | 11W | AC85V-260V | SMD3014 | 2700-7500K | 910Lm | 160° | ≥30,000hrs |
| YZS-T509-U | L800xW25x35mm | 15W | AC85V-260V | SMD3014 | 2700-7500K | 1420Lm | 160° | ≥30,000hrs |
| YZS-T512-U | L1100xW25x35mm | 18W | AC85V-260V | SMD3014 | 2700-7500K | 1820Lm | 160° | ≥30,000hrs |
| YZS-T515-U | L1400xW25x35mm | 24W | AC85V-260V | SMD3014 | 2700-7500K | 2500Lm | 160° | ≥30,000hrs |

YZS-BU-A60



small size

9W

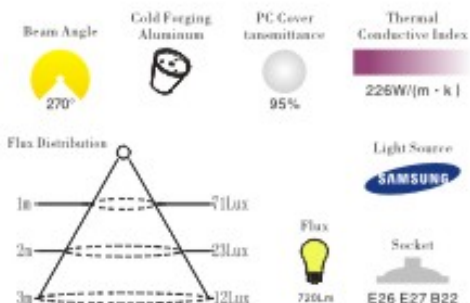


YZS-BU-H18



High Bulb

18W

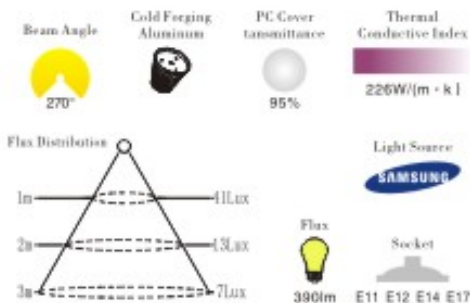


YZS-BU-GU10



mini size

COB 6W

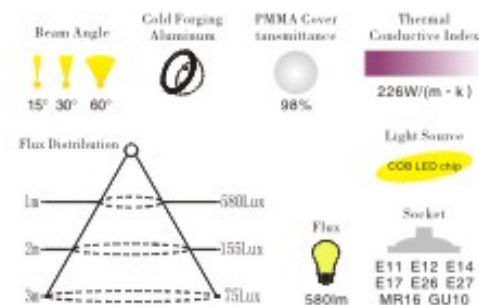

| Model No. | Power | Voltage | Light Source | CCT | Flux | Dimension | Socket | Beam Angle | Life Span |
|-------------|--------|---------|--------------|------------|--------|------------|-------------|------------|------------|
| YZS-BU-A50 | 3-5W | Ac220v | SMD5630 | 2700-7500K | 80Lm/w | φ50xH90mm | E26 E27 B22 | 180° | ≥30,000hrs |
| YZS-BU-A60 | 7-9W | Ac220v | SMD5630 | 2700-7500K | 80Lm/w | φ60xH105mm | E26 E27 B22 | 180° | ≥30,000hrs |
| YZS-BU-A70 | 12-15W | Ac220v | SMD5630 | 2700-7500K | 80Lm/w | φ70xH115mm | E26 E27 B22 | 180° | ≥30,000hrs |
| YZS-BU-H80 | 18W | Ac220v | SMD5630 | 2700-7500K | 80Lm/w | φ80xH135mm | E26 E27 B22 | 180° | ≥30,000hrs |
| YZS-BU-H100 | 28W | Ac220v | SMD5630 | 2700-7500K | 80Lm/w | | E26 E27 B22 | 180° | ≥30,000hrs |
| YZS-BU-H115 | 38W | Ac220v | SMD5630 | 2700-7500K | 80Lm/w | | E26 E27 B22 | 180° | ≥30,000hrs |
| YZS-BU-H120 | 48W | Ac220v | SMD5630 | 2700-7500K | 80Lm/w | | E26 E27 B22 | 180° | ≥30,000hrs |



Dimension(mm)



规格参数/Specification List

| Model | YZS-UFO4-100W | YZS-UFO4-150W | YZS-UFO4-200W |
|---------------------|-------------------|-------------------|-------------------|
| Materials | Aluminum Alloy | Aluminum Alloy | Aluminum Alloy |
| Power | 100W | 150W | 200W |
| Luminous Efficiency | 120-140LM/W | 120-140LM/W | 120-140LM/W |
| Luminous Flux | 12000LM | 18000LM | 24000LM |
| Input Voltage | AC85-265V | AC85-265V | AC85-265V |
| LED Qty | 119pcs 3030 Osram | 196pcs 3030 Osram | 252pcs 3030 Osram |
| Power Factor | > 0.95 | > 0.95 | > 0.95 |
| CCT | 2700-6500K | 2700-6500K | 2700-6500K |
| CRI | > 80 | > 80 | > 80 |
| Working Temperature | -35°C ~ 55°C | -35°C ~ 55°C | -35°C ~ 55°C |
| Power Supply | Mean Well | Mean Well | Mean Well |
| IP Grade | IP65 | IP65 | IP65 |
| Beam Angle | 60°/90°/120° | 60°/90°/120° | 60°/90°/120° |
| Life Span | 50000H | 50000H | 50000H |
| Dimension | 278×278×170.9mm | 328×328×170.5mm | 368×368×201.5mm |
| Certification | ETL, DLC, TUV | ETL, DLC, TUV | ETL, DLC, TUV |



140LM/W

OSRAM SMD3030

Meanwell Driver


100W/150W/200W

5 Years Warranty


Installation



Light distribution curve



Cone Lux Diagram





【产品特点 Feature】

- * 高PF, 高效率
 - * 隔离驱动电源
 - * 宽压AC85-265V
 - * 采用安全可靠恒流模式
 - * 开路、短路、过载、过压保护。
- * No strobe
 - * Isolated drive power
 - * Input : AC85-265V
 - * Adopt safe and reliable constant current mode
 - * Open circuit, short circuit, overload, over voltage protection

| Model No | Dimension | Power | Input | PFC | Output | Current | Shell | Life Span |
|------------------|-------------|-------|------------|------|-----------|---------|----------|------------|
| YZS-DR-IP65-20W | 115x40x30mm | 20W | AC85V-260V | 0.95 | DC 24-45V | 600mA | Al alloy | ≥30,000hrs |
| YZS-DR-IP65-30W | 115x40x30mm | 30W | AC85V-260V | 0.95 | DC 24-45V | 900mA | Al alloy | ≥30,000hrs |
| YZS-DR-IP65-40W | 115x40x30mm | 40W | AC85V-260V | 0.95 | DC 24-45V | 1200mA | Al alloy | ≥30,000hrs |
| YZS-DR-IP65-50W | 140x42x32mm | 50W | AC85V-260V | 0.95 | DC 24-45V | 1500mA | Al alloy | ≥30,000hrs |
| YZS-DR-IP65-80W | 180x61x38mm | 80W | AC85V-260V | 0.95 | DC 24-45V | 1500mA | Al alloy | ≥30,000hrs |
| YZS-DR-IP65-100W | 180x61x38mm | 100W | AC85V-260V | 0.95 | DC 24-45V | 1500mA | Al alloy | ≥30,000hrs |
| YZS-DR-IP65-150W | 210*68*39mm | 150W | AC85V-260V | 0.95 | DC 24-45V | 1500mA | Al alloy | ≥30,000hrs |




【产品特点 Feature】

- * 无频闪
 - * 隔离驱动电源
 - * 宽压AC85-265V
 - * 采用安全可靠恒流模式
 - * 开路、短路、过载、过压保护。
- * No strobe
 - * Isolated drive power
 - * Input : AC85-265V
 - * Adopt safe and reliable constant current mode
 - * Open circuit, short circuit, overload, over voltage protection

| Model No | Dimension | Power | Input | PFC | Output | Current | Shell | Life Span |
|-------------------|-------------|-------|------------|------|-----------|---------|---------|------------|
| YZS-DR-IP40-1/3W | 80x32x23mm | 3W | AC85V-260V | 0.65 | DC 9-12V | 300mA | Plastic | ≥30,000hrs |
| YZS-DR-IP40-5/8W | 80x32x23mm | 8W | AC85V-260V | 0.65 | DC 12-24V | 300mA | Plastic | ≥30,000hrs |
| YZS-DR-IP40-8/12W | 80x32x23mm | 12W | AC85V-260V | 0.65 | DC 24-45V | 300mA | Plastic | ≥30,000hrs |
| YZS-DR-IP40-18W | 115x45x25mm | 18W | AC85V-260V | 0.65 | DC 45-60V | 300mA | Plastic | ≥30,000hrs |
| YZS-DR-IP40-24W | 115x45x25mm | 24W | AC85V-260V | 0.65 | DC 60-75V | 300mA | Plastic | ≥30,000hrs |
| YZS-DR-IP40-36W | 115x45x25mm | 36W | AC85V-260V | 0.65 | DC 36-45V | 950mA | Plastic | ≥30,000hrs |
| YZS-DR-IP40-42W | 115x45x25mm | 40W | AC85V-260V | 0.65 | DC 36-45V | 1250mA | Plastic | ≥30,000hrs |

产品规格参数 Product specifications

| | |
|--|---|
| 产品名称 Product name | WiFi控制器 WiFi controller |
| 输入电压 Input voltage | DC5-24V |
| 输出电流 Output current | 5X6A |
| 最大功率 Maximum power | 360瓦 |
| 最大输出电流 Maximum output current | 30A |
| 输出端口 Output port | RGB/RGB+W/RGB+WW/RGB+CCT |
| 控制模式 Control mode | 手机APP |
| 内置指示灯 Built-in indicator light | RGB+白光+暖光 |
| 网络协议 Network protocol | 双协议，终端同步 Dual protocol, terminal synchronization |
| 断电记忆 Power off memory | 支持 support |
| 按键切换 Key switch | 支持 support |
| 自动配网 Automatic distribution network | 支持 support |
| 产品尺寸 Product Size | 115x68x26mm |
| 产品重量 product weight | 180G |
| 网络通信 Telecommunication | WiFi或4G网络 WiFi or 4G network |
| 应用产品 Application products | 灯带，线条灯，面板灯，筒灯 Light strip, line light, panel light, down light |
| 兼容设备 Compatible device | 天猫精灵，小米，百度小爱，叮咚 Amazon, Alexa, Google, assistant |
| 支持定制 Support customization | WiFi, ZigBee, 2.4G、红外、高压输入输出,功率定制，硬件定制 WiFi, ZigBee, 2.4G, infrared, high voltage input and output |

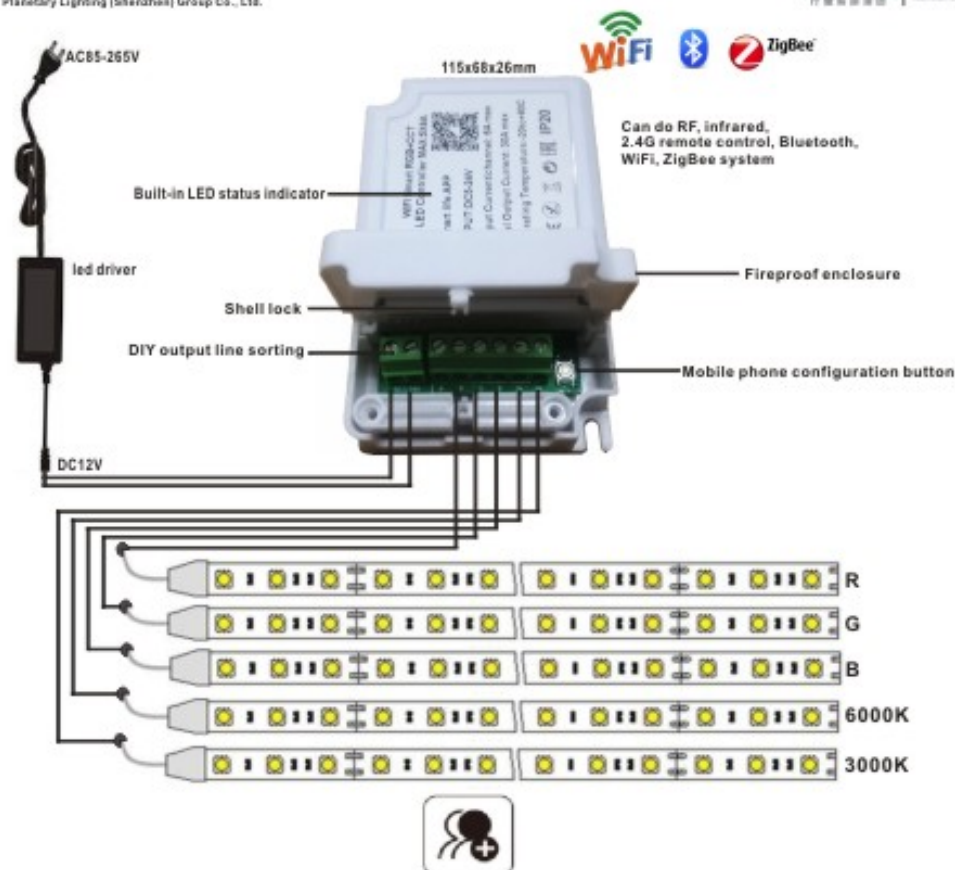

Grouping Settings, Grouping control

One mobile phone control, unlimited control terminal, controller multiple lights in parallel

Multiple phones sharing device



产品参数 Product parameter

| | |
|--------------------------------|---|
| 输入电压 Input voltage | DC5-24V |
| 最大功率 Maximum power | 120W |
| 工作频率 working frequency | 2.4G |
| 网络通讯 Network communication | WIFI & 4G |
| 输出端口 Output port | RGB / RGB+W / RGB+WW / RGB+CCT |
| 控制模式 Control mode | 手机APP |
| 控制功能 control function | 调光, 调色, RGB, 自定义场景闪烁, 音乐炫动, 定时 Dimming, color toning, RGB, custom scene flashing, music dazzling, timing |
| 产品尺寸 Product Size | 含线长290mm, 壳宽24mm, 壳高12mm Including cable length 290mm, shell width 24mm, shell height 12mm |
| 单个包装尺寸 Single package size | 静电袋120*80*12mm |
| 配网方式 Distribution network | 长按3秒按键, LED快闪 (可定制无须开关配网) Long press the button for 3 seconds, the LED flashes quickly (can be customized without switching the network) |
| 产品单重量 product single weight | 50G |
| 产品应用 Applications | 灯带 (可定制适用于面板灯, 工矿灯, 轨道灯, 筒灯) Light strip (can be customized for panel lights, high bay lights, track lights, down lights) |
| 兼容设备 Compatible device | 国内: 天猫精灵, 小米, 百度小爱, 叮咚 Amazon, Alexa, Google, Assistant |
| 支持定制 Support customization | 功率定制, 控制界面部分定制, 硬件定制, 贴牌打标 Power customization, control interface part customization, hardware customization, OEM |

General ordering instructions for WiFi controllers



LED light strip controller

Global networking,
support customization,
OEM

Can do RF, infrared,
2.4G remote control, Bluetooth,
WiFi, ZigBee system

Normal output sorting

+ W WW Name: CCT

+ R G B Name: RGB

+ R G B W Name: RGBW

+ R G B WW Name: RGBWW

+ WW R G B W Name: RGB+CCT

Before production, please confirm whether the order of the light strips is the same, and you can change the order. Some light strips on the market are wrong, please power on to confirm



LED Linear Drive - Ultra-thin Flood Light



规格参数/Specification List

| 型号/Model | 尺寸/Size | 功率/Power | 流明/Lumen | 色温/CCT | 发光角度 | 输入/Input | 电源/Driver | 防水/IP |
|---------------|--------------|----------|----------|------------|------|------------|-----------|-------|
| YZS-FLUL-10W | 105*35*85mm | 10W | 85Lm/W | 2700-6000K | 90° | AC220-240V | 线性驱动 | Ip65 |
| YZS-FLUL-20W | 153*25*110mm | 20W | 85Lm/W | 2700-6000K | 90° | AC220-240V | 线性驱动 | Ip65 |
| YZS-FLUL-30W | 205*30*160mm | 30W | 85Lm/W | 2700-6000K | 90° | AC220-240V | 线性驱动 | Ip65 |
| YZS-FLUL-50W | 240*30*170mm | 50W | 85Lm/W | 2700-6000K | 90° | AC220-240V | 线性驱动 | Ip65 |
| YZS-FLUL-70W | 305*30*205mm | 70W | 85Lm/W | 2700-6000K | 90° | AC220-240V | 线性驱动 | Ip65 |
| YZS-FLUL-100W | 333*40*254mm | 100W | 85Lm/W | 2700-6000K | 90° | AC220-240V | 线性驱动 | Ip65 |
| YZS-FLUL-150W | 365*42*280mm | 150W | 85Lm/W | 2700-6000K | 90° | AC220-240V | 线性驱动 | Ip65 |

线性驱动: 驱动电源部分集成在铝基板里面, 成本低重量轻, 运输方便



规格参数/Specification List

| 型号/Model | 尺寸/Size | 功率/Power | 流明/Lumen | 色温/CCT | 发光角度 | 输入/Input | 电源/Driver | 防水/IP |
|-------------|--------------|----------|-------------|------------|------|-----------|-----------|-------|
| YZS-F1-10W | 130*120*40mm | 10W | 85Lm/W | 2700-6000K | 120° | AC85-265V | CE/ROHS | Ip65 |
| YZS-F1-20W | 180*160*40mm | 20W | 120/140Lm/W | 2700-6000K | 120° | AC85-265V | CE/ROHS | Ip65 |
| YZS-F1-30W | 230*200*50mm | 30W | 120/140Lm/W | 2700-6000K | 120° | AC85-265V | CE/ROHS | Ip65 |
| YZS-F1-50W | 290*240*60mm | 50W | 120/140Lm/W | 2700-6000K | 120° | AC85-265V | CE/ROHS | Ip65 |
| YZS-F1-100W | 350*300*80mm | 100W | 120/140Lm/W | 2700-6000K | 120° | AC85-265V | CE/ROHS | Ip65 |