

#### HD60X12.5R3DE-V21

60x

Applicable camera (model)

1

2/3

1/1.8

1/2

1/3

1/4

For Surveillance

HD  
2MP

Day  
Night

Applicable to  
1/1.8

FOG

变焦

电动

长焦点

DC自动光圈

C接口

金属接口

预置

RoHS 认证

2倍扩展

透雾

ZOOM

MOTOR  
DRIVE

TELE

D C

C-mt


METAL

PRESET

RoHS

2 X

FOG

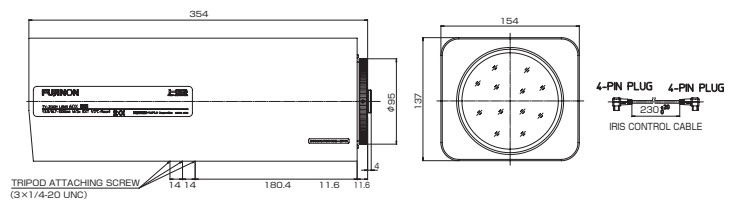

Unit : mm

#### HD60X12.5R3DE-V21

焦距范围 ( mm )			1×	12.5- 750		
			2×	25 - 1500		
光圈范围			1×	F3.6 - F16		
			2×	F7.2 - F32		
滤镜			透雾			
操作方式			变倍	电动		
			聚焦	电动		
			光圈	DC自动		
AF			N/A			
Optical Anti-Vibration			N/A			
视 角 (H × V) (4:3) (mm)	1/1.8"	1×	广角端	32°10' ×24°18'		
			长焦端	0°34' × 0°25'		
	1/2"	2×	广角端	16°05' ×12°09'		
			长焦端	0°15' × 0°11'		
		1×	广角端	28°43' ×21°44'		
			长焦端	0°29' × 0°22'		
视 角 (H × V) (16:9) (mm)	1/1.8"	2×	广角端	14°35' ×10°58'		
			长焦端	0°15' × 0°11'		
	1/2"	1×	广角端	35°05' ×19°36'		
			长焦端	0°36' × 0°20'		
		2×	广角端	17°33' ×9°48'		
			长焦端	0°18' × 0°10'		
最小物距 From Front Of The Lens ) ( m )			1×	31°29' × 17°37'		
			2×	0°32' × 0°19'		
最小物距下的 物体大小 (H×V) (4:3) (mm)			1×	15°44' × 8°48'		
			2×	0°16' × 0°09'		
最小物距下的 物体大小 (H×V) (mm) (16:9) (mm)			1×	∞ - 5		
			1/1.8"	2×	广角端	2565 × 1949
					长焦端	50 × 36
			1/2"	1×	广角端	1282 × 975
					长焦端	25 × 18
				2×	广角端	2465 × 1849
长焦端	41 × 31					
最小物距下的 物体大小 (H×V) (mm) (16:9) (mm)			1/1.8"	2×	广角端	1233 × 924
					长焦端	21 × 15
			1/2"	1×	广角端	2595 × 1989
					长焦端	58 × 38
				2×	广角端	1298 × 995
					长焦端	29 × 19
后焦距 (空气换算长) ( mm )			1×	1929 × 1110		
			2×	34 × 20		
出射光瞳 (从成像面) ( mm )			1×	972 × 553		
			2×	17 × 10		
过滤螺纹 ( mm )			53.23			
接口			(1x)-64			
扩展			M107 × 1			
重量 (kg)			C			
标准配件			2x			
备注			5.2			
			光圈控制电缆 15针连接接头 5针连接接头			

#### Wiring

