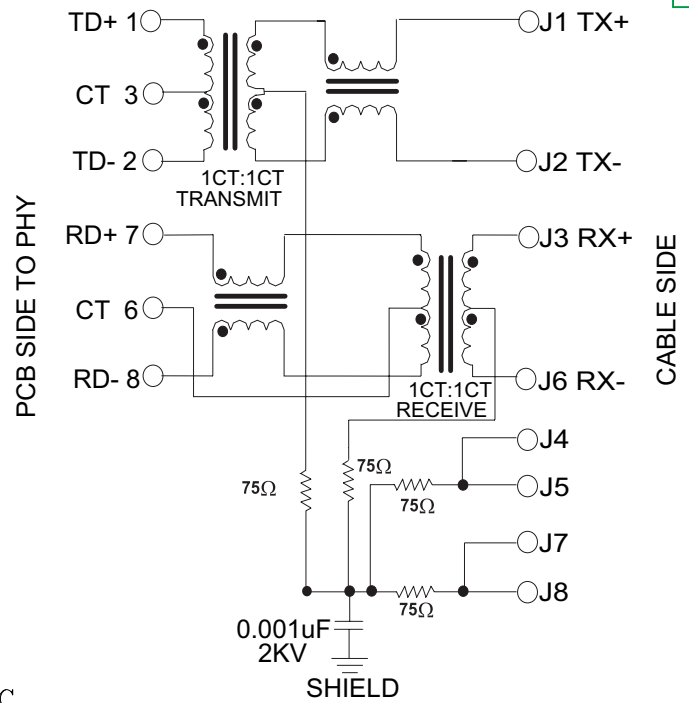


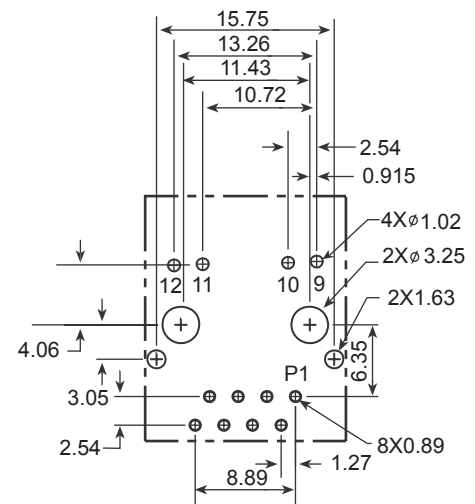
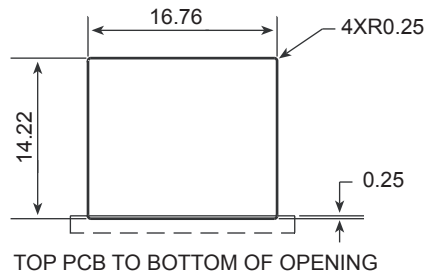

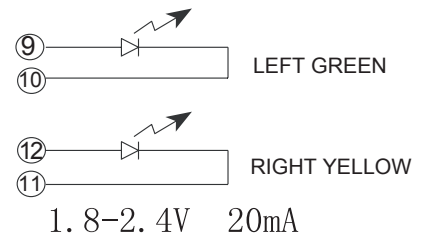
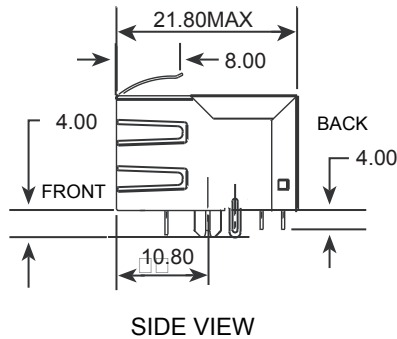
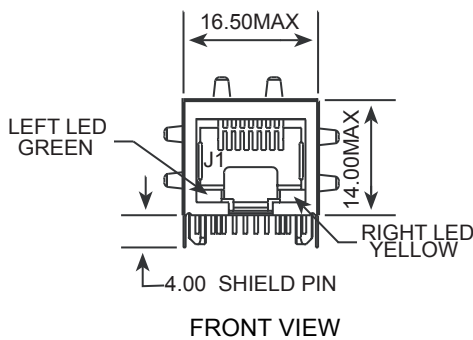
- Turn Ratio(+/-2%):
TX=1CT :1CT RX=1CT:1CT
- Inductance OCL:
350uH Min @100KHz/0.1V ,8mA DC Bias
- Insertion Loss:
-1.0dB Max @1.0-100MHz
- Return Loss:
-20dB Min @1-10MHz
-16dB Min @10-30MHz
-12dB Min @30-60MHz
-10dB Min @60-100MHz
- Cross talk:
-40dB Min @1-30MHz
-35dB Min @30-60MHz
-30dB Min @60-100MHz
- Common Mode Rejection:
-30dB Min @1-50MHz
-20dB Min @50-150MHz
- HIPOT TEST :1500V AC 1mA 6S
- OPERATING TEMPERATURE RANGE:0-70°C

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:



Schematics



Mechanical



Viewed from PCB Component side

E-mail:szsmhdz@163.com				深圳市铭辉电子有限公司 Shenzhen MingHui Electronic Co.,Ltd.		
http:// www.minghuiy.com						
单位 (units)	MM	设计 (draw)	邓建伟	材料 (mt' l)	图名 (name)	RJ45 Modular Jack 1x1Tab-Down 100BASE
比例 (scale)	1 : 1	审核 (ch' k)	邓荣进	UNIT:mm .xx +/-0.25, xxx +/-0.13		
版次 (rev.)	A / 1	核准 (app' d)	邓荣进	HOUSING	PBT	料号 (Part number)
视图 (view)		日期 (date)	2008. 08. 12	PIN	Qsn6. 5-0. 1	图档 (File Name)
						E:\工程图