


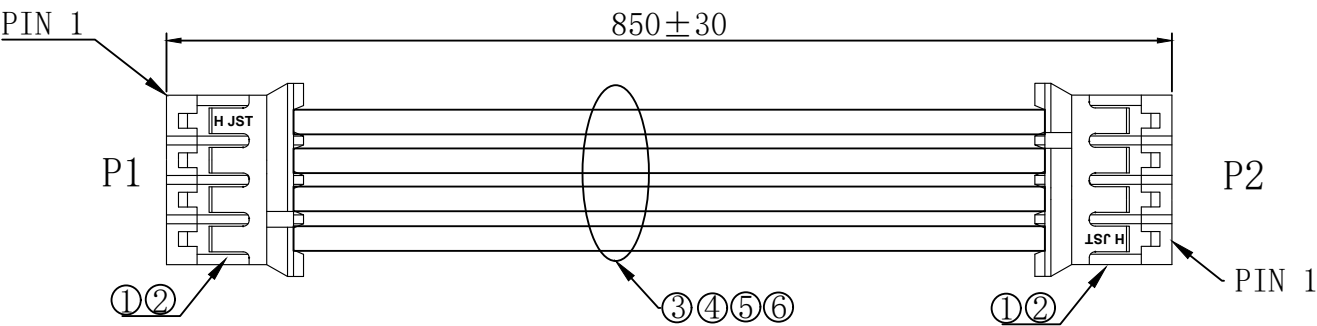

Pin Definition		
P1	COLOR	P2
1	RED	1
2	BLACK	2
3	BLUE	3
4	YELLOW	4

Bill of materials					
NO	Product name	Description	Qty	Vendor	Remark
1	Housing	PHR-4	2	JST	
2	Terminal	SPH-002T-P0.5	8	JST	
3	Wire	UL1015 24AWG RED	800	XINYA	
4	Wire	UL1015 24AWG BLACK	800	XINYA	
5	Wire	UL1015 24AWG BLUE	800	XINYA	
6	Wire	UL1015 24AWG YELLOW	800	XINYA	

Note:
1.Environmental Requirements:Subject to compliance (RoHS)
2.The "*" symbol on the drawing is the key dimension.
3.Test Conditions:Voltage is 300V, Insulation Resistance is 20MΩ, On-Resistance is 3Ω Max, Test Time 0.01 S.

REV	DESCRIPTION	DATE
REVISIONS		

X. ±1.0	X° . ±
. X±0.2	. X° ±
. XX±0.1	. XX° ±
. XXX±	. XXX° ±

APPROVED:

CHECKED:

ENGINEER:
Vincent

DRAWING:
Vincent

SHS Technology

P/N:

DWG No:

C. P/N:

REV	UNIT	Client Version:
1	m/m	DATE: 2024-04-22