

SPECIFICATION




P/N: MED 2X34AWG TPV GRAY

Customer File NO. _____

Customer Signed by. _____

SUZHOU SHS TECHNOLOGY CO.,LTD

苏州尚虹鑫电子科技有限公司

APPROVED	CHECK	DRAWING
 徐 磊 2022.9.16	 徐 磊 2022.9.16	 王思哲 2022.9.16

1. Scope

This specification covers mutil wire cable for medical equipment.

2. Construction and Material

Item		Unit	Specified Value
Conductor	Size	AWG	34
	Material	-	Tinned copper
	Stranding	No./mm	7/0.064
Insulation	Material	-	FEP
	Color	-	Blue, Yellow
	Thickness(Nom)	mm	0.052
	Concentricity	%	Min.85
	Diameter	mm	0.30±0.01
Twisted		-	See Fig.1
Shield	Material	-	Tinned copper
	Strand (Nom.)	mm	0.05
	Coverage	%	Nom.90
Jacket	Material	-	Medical TPV (Color: Gray)
	Thickness(Nom)	mm	0.55
	Diameter	mm	1.80±0.15

3. Electrical Properties

Item	Unit	Specified Value
Conductor Resistance (@ 20°C)	Ω/km	Max. 900
Insulation resistance (@ 20°C)	MΩ -km	Min. 500
Dielectric Strength ¹⁾	-	To withstand A.C. 500V for 1min

1): Applied between each conductor.

4. Package

- 1). Unit length : According customer requirement.
- 2). Package: Coiled and then packed into carton box.

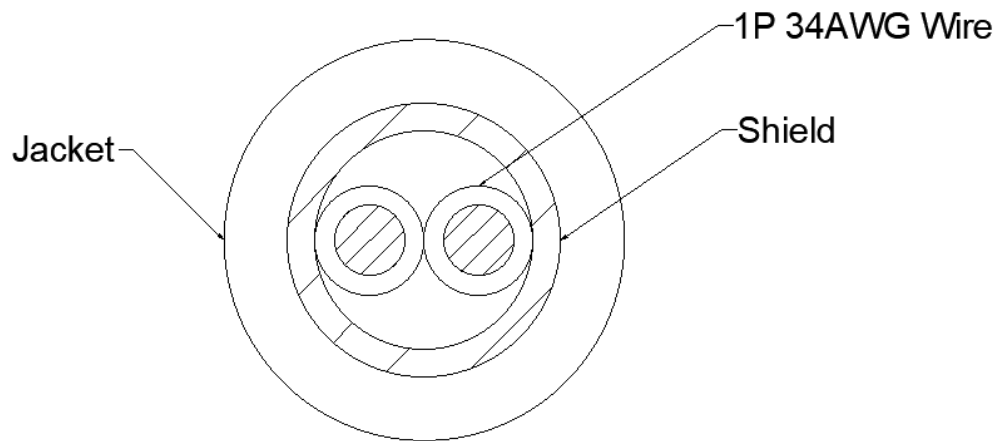


Fig.1 Cross section of cable

REVISION RECORD

Rev. No	Issue date	Item	DWN	CHK	APVD
1	9/16/2022	First Released	Carter.W	Lester.X	Lester.X