




Finished Drawing

-  黑色奈米胶带
-  醋酸布胶带

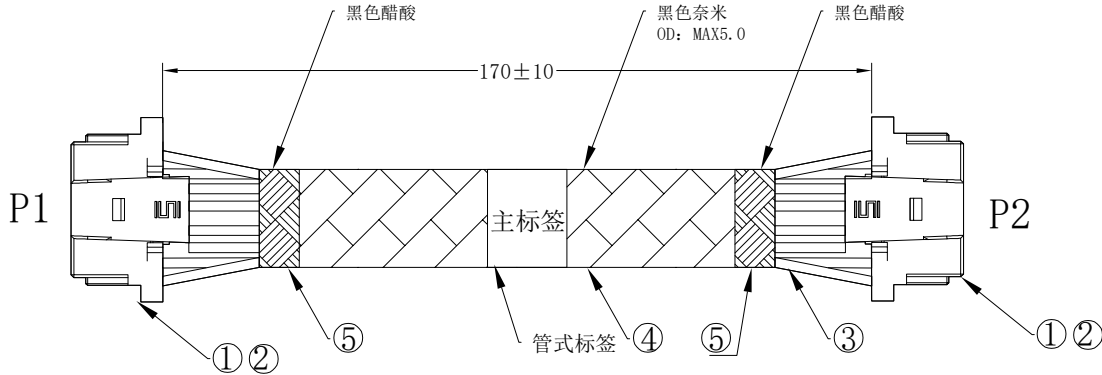



Pin Definition		
P1	COLOR	P2
1	BLACK	1
2	WHITE	2
3	RED	3
4	YELLOW	4
5	BLACK	5
6	WHITE	6
7	RED	7
8	YELLOW	8


Note:

- Environmental Requirements:Subject to compliance (RoHS)
- The "*" symbol on the drawing is the key dimension.
- Test Conditions:Voltage is 300V, Insulation Resistance is 20MΩ, On-Resistance is 3Ω Max, Test Time 0.01 S.

Bill of materials					
NO	Product name	Description	Qty	Vendor	Remark
1	Housing	ISS1-08-L	2	SAMTEC	
2	Terminal	CC09R-01-GF	16	SAMTEC	
3	WIRE	AFR250镀银高温线 30AWG (导体: 10/0.08) OD:0.59mm	170mm	SHS	
4	包材	黑色奈米胶带	150mm	JJD	
5	包材	醋酸布胶带	100mm	JJD	

REV	DESCRIPTION	DATE
REVISIONS		

X. ±1.0	X° . ±
. X±0.2	. X° ±
. XX±0.1	. XX° ±
. XXX±	. XXX° ±
	

APPROVED:		SHS Technology			
		P/N:			
CHECKED:		DWG No:			
ENGINEER:		C. P/N:			
Vincent		REV	UNIT	Client Version:	
DRAWING:		1	m/m	DATE:2024-07-31	
Vincent					