

PITCH 1.0mm FPC CONNECTOR SMT TYPE

性能:

额定电流: 0.5A

额定电压: 50V

耐电压: 500V




接触电阻: $\leq 20\text{m}\Omega$ 绝缘电阻: $800\text{M}\Omega$ 工作温度: $-20^{\circ}\text{C}\sim+85^{\circ}\text{C}$

塑件(材质): LCP, UL94V-0


锁扣(材质): PA46, UL94V-0

插簧(材质): 磷青铜, 镀锡/镀金


焊片(材质): 磷青铜, 镀锡/镀金

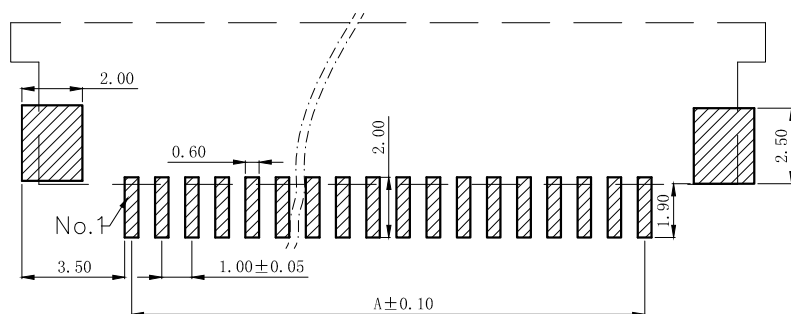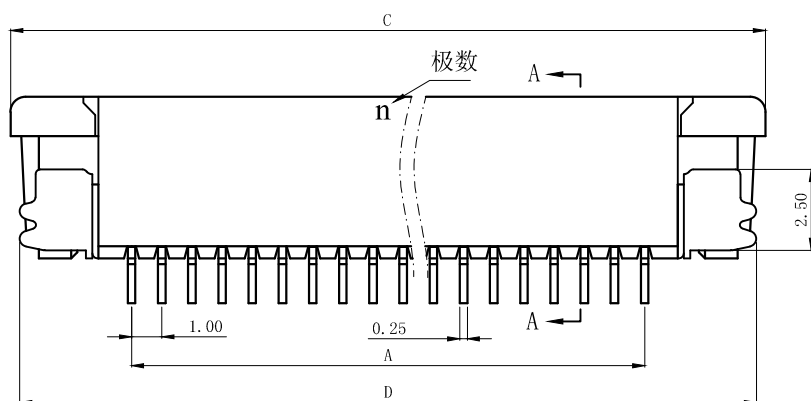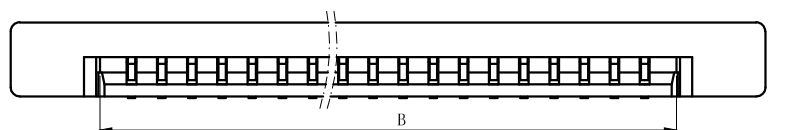

印制电路板(PCB)

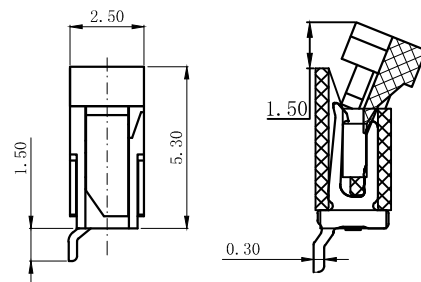

A--A

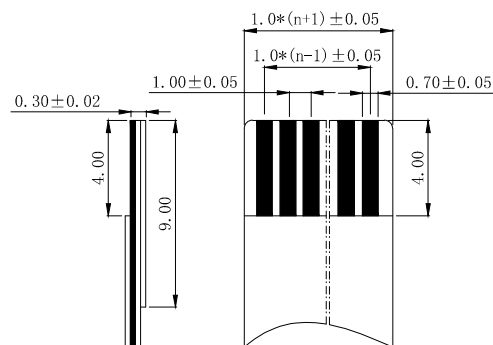

适用扁平电缆

孔位	A	B	C	D
4	3.00	5.30	11.10	10.10
5	4.00	6.30	12.10	11.10
6	5.00	7.30	13.10	12.10
7	6.00	8.30	14.10	13.10
8	7.00	9.30	15.10	14.10
9	8.00	10.30	16.10	15.10
10	9.00	11.30	17.10	16.10
11	10.00	12.30	18.10	17.10
12	11.00	13.30	19.10	18.10
13	12.00	14.30	20.10	19.10
14	13.00	15.30	21.10	20.10
15	14.00	16.30	22.10	21.10
16	15.00	17.30	23.10	22.10
17	16.00	18.30	24.10	23.10
18	17.00	19.30	25.10	24.10
19	18.00	20.30	26.10	25.10
20	19.00	21.30	27.10	26.10
21	20.00	22.30	28.10	27.10
22	21.00	23.30	29.10	28.10
23	22.00	24.30	30.10	29.10
24	23.00	25.30	31.10	30.10
25	24.00	26.30	32.10	31.10
26	25.00	27.30	33.10	32.10
27	26.00	28.30	34.10	33.10
28	27.00	29.30	35.10	34.10
29	28.00	30.30	36.10	35.10
30	29.00	31.30	37.10	36.10
31	30.00	32.30	38.10	37.10
32	31.00	33.30	39.10	38.10
33	32.00	34.30	40.10	39.10
34	33.00	35.30	41.10	40.10
35	34.00	36.30	42.10	41.10

一沃电子实业有限公司
TEL:+86-755-36887540
FAX:+86-755-36887541
<http://www.ewconn.com>

X. ± 0.3	X° $\pm 5^{\circ}$	UNITS mm
.X ± 0.25	.X° $\pm 2^{\circ}$	MAT'L
.XX ± 0.20	.XX° $\pm 1^{\circ}$	
.XXX ± 0.10	.XXX° $\pm 0.5^{\circ}$	FINISH
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DE RUI ELECTRON FACTORY AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DE RUI ELECTRON FACTORY		Q'TY

NAME (INTENDED USE)	1.0mm FPC (E型) 半包下接(H=2.5)
PART NO. (INTENDED USE)	FPC1026-XXP
APPD:	
CHKD:	
DR:	YLZ 2011.09.28

EWCONNECTOR	E-WORLD ELECTRONIC INDUSTRY LTD
TITLE:	1.0mm FPC (E型) 半包下接(H=2.5)
DWG NO.:	100K13-EXB0000000
SCALE	1/1
SHEET	1/1
REV.	A