All aluminum downlight specifications
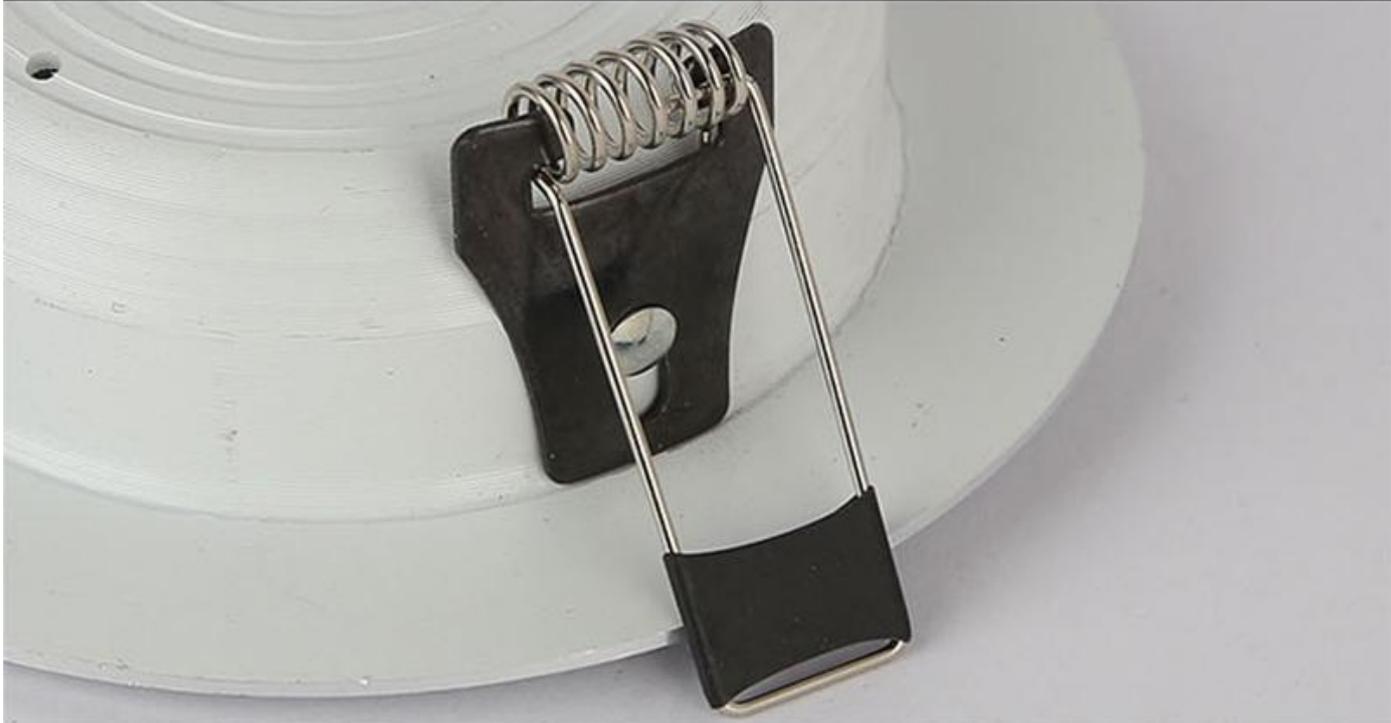
Model No.	
Product Name	LED Downlight
Brand	Sponsor
Color	White
Ingress Protection	IP44
Power	3W/ 5W/ 7W / 9W/ 12W / 15W/ 18W
Power standard	100%Full Watt Power
Warranty	3 years
lumen	90lm/w
LED Chip	2835SMD
UGR	<22
Size	2 inch/ 2.5 inch/3 inch/ 3.5 inch/4 inch/5 inch/ 6 inch
CCT	3000K 4000K 6000K
CRI	>80
Shell size	95/100/120/138/180/190/225mm
Opening Size	65/75/85/110/145/150/190mm

3W(2 inches)

5W(2.5 inches)

5W(3 inches)

7W(3.5 inches)

12W(4 inches)

15W(5 inches)

18W(6 inches)
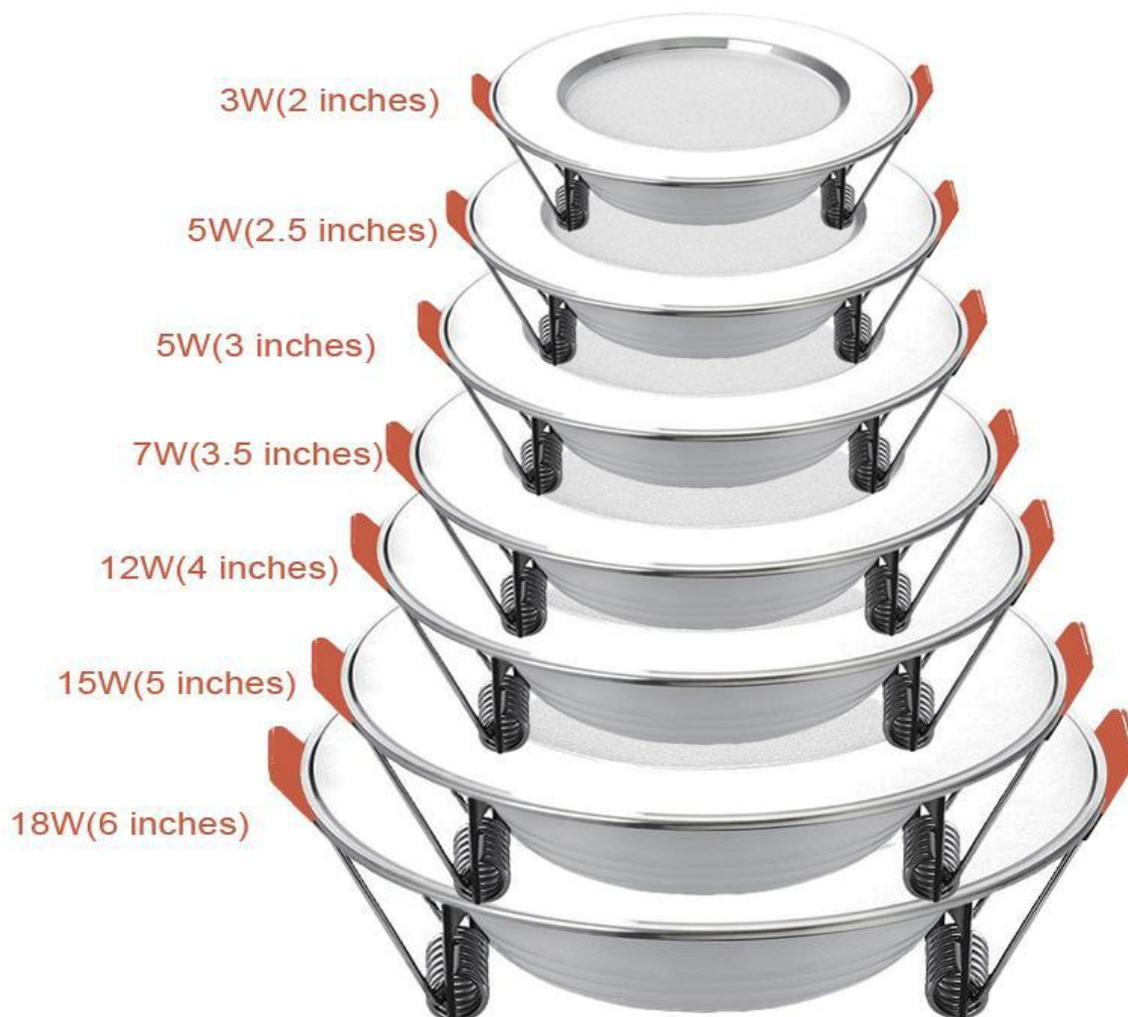
Aviation Aluminum
Surface Cover Ring

High Corrosion Resistance, High-end Fashion

Fixed Spring

Easy to install, Strong spring force

Thickened Radiator

Efficient heat dissipation, extend lamp life

Professional PMMA Lens

High transmittance, Uniform illumination

Application

OFFICE ENVIRONMENT   EXHIBITION HALL   HOME FURNISHING   MARKET   HOTEL

Residential
Commercial
Lighting

Color Temperature

3 Different CCT (Meet anything you need)

Warm White (3000K-3200K)
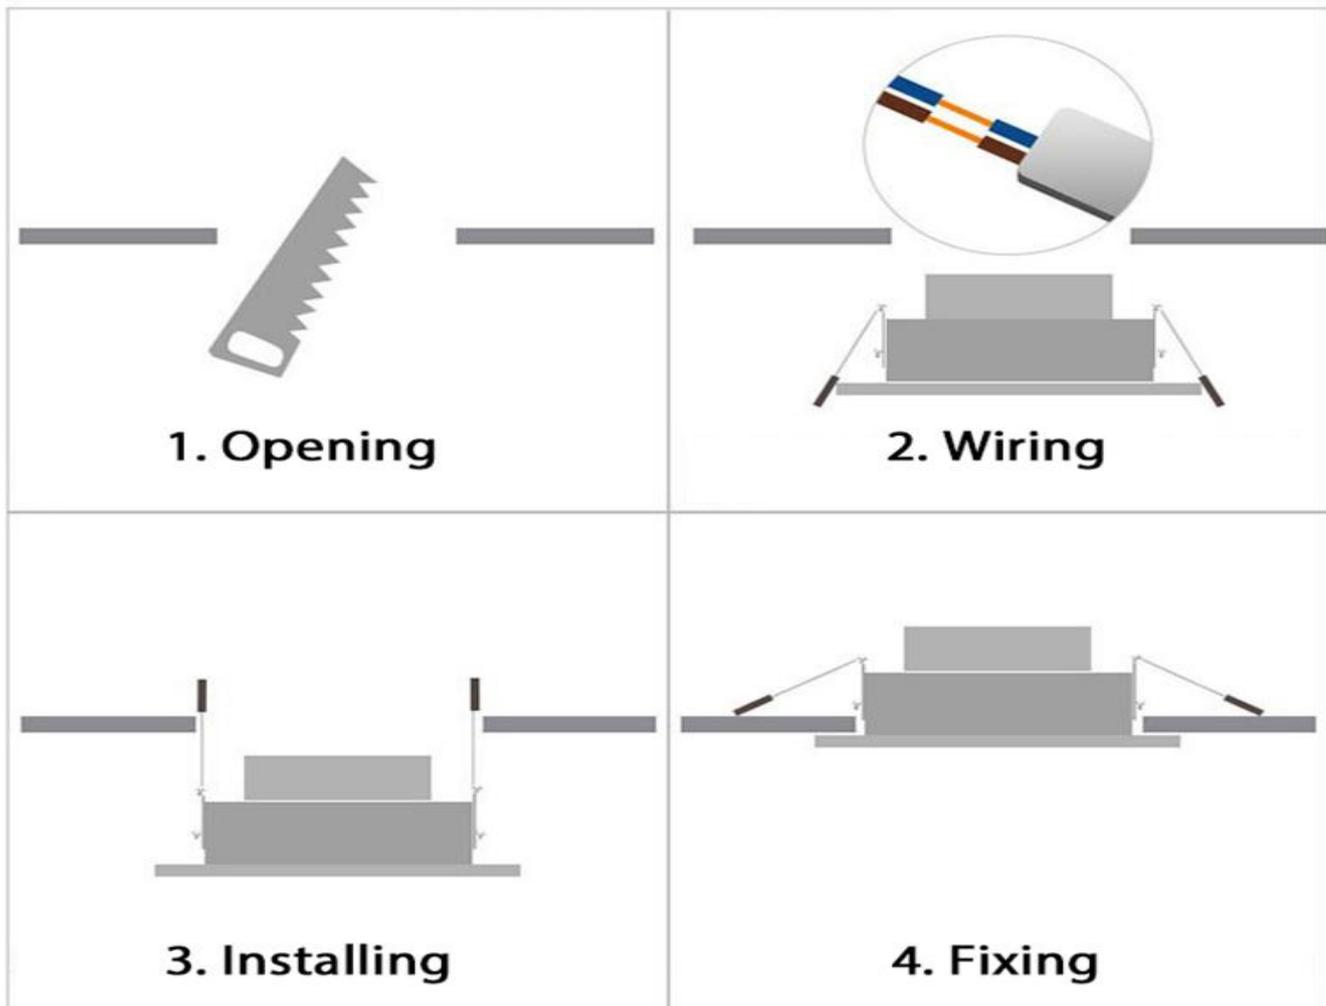
Home, Hotel etc
(Cozy atmosphere)

White (6000K-6500K)

High lumen
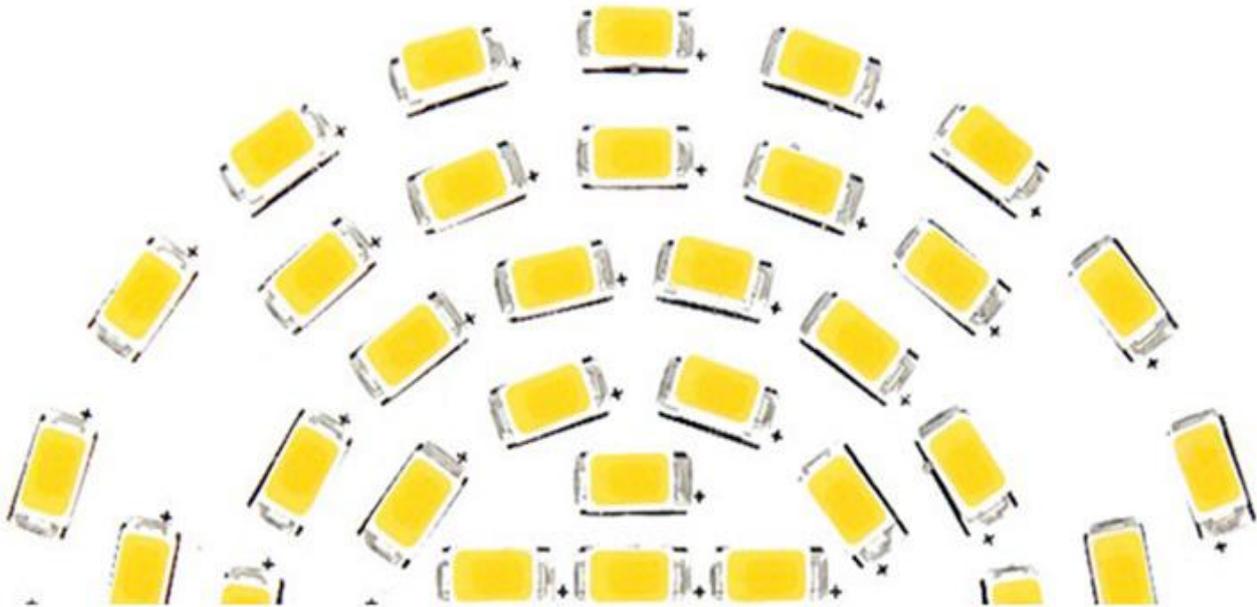Highly Color-rendering Index

Neutral light (4000K-4200K)

Close to Naturl
(Harmonious Atmosphere)

Power Off Installation

1. Opening

2. Wiring

3. Installing

4. Fixing

SMD CHIPS

Adopt high luminous efficiency **5730** SMD LED, low degradation, UP to 90 LM/W, high brightness, Environment friendly

HIGH CRI>80

The light source is not exposed. Visual effects are soft and uniform

Good Color Rendering

Poor Color Rendering