

RF4[®]

FOCUS DESIGN AND CONCEPT

6565PRO Serie




TRINOCULAR STEREO MICROSCOPE

体视显微镜

一、结构

- 1.目镜玻璃片
- 2.可调目镜
- 3.变焦手轮
- 4.物镜
- 5.相机
- 6.底座
- 7.调焦手轮
- 8.圆立柱
- 9.镜头
- 10.显示屏
- 11.防漏光眼罩

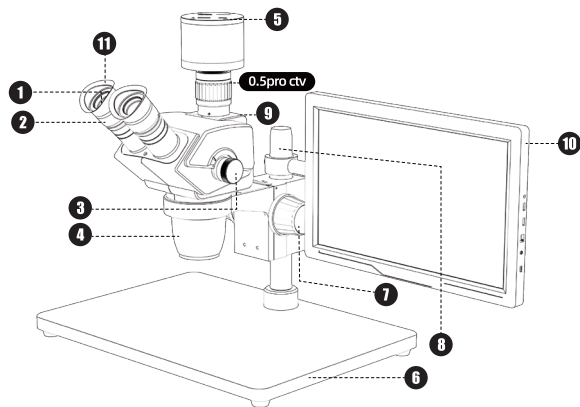







二、不同的目镜匹配同一物镜的不同放大率

目镜	标准配置		附加大物镜					
			0.5X		0.7X		2X	
	工作距离105mm		工作距离177mm		工作距离123mm		工作距离30mm	
	放大倍率	视场范围	放大倍率	视场范围	放大倍率	视场范围	放大倍率	视场范围
10X/23 标准配置	6.5X-65X	3.54-35.38mm	3.25X-32.5X	7.08-70.76mm	4.55X-45.5X	5.05-50.5mm	13X-130X	1.77-17.7mm
20X/12	13X-130X	1.85-18.46mm	6.5X-65X	3.69-36.92mm	9.1X-91X	2.68-26.37mm	26X-260X	0.92-9.23mm

TRINOCULAR
STEREO MICROSCOPE

三、不同显微镜的对比

型号	图片	底座和支柱	镜头和配件	相机和显示屏
RF-6565R		250mm φ32mm 支柱, 200mm*255mm 标准底座	6.5X-65X 三目连续变焦	不同型号可选的
			WF10X/23mm可调节目镜	
			0.5Pro ctv	
			防尘物镜	
			144 LED 灯	
RF-6565PRO		240mm φ32mm 支柱 380 x260mm 大底座	6.5X-65X 三目连续变焦	不同型号可选的
			WF10X/23mm可调节目镜	
			0.5Pro ctv	
			防尘物镜	
			144 LED 灯	
RF-6565PRO2		380 x260mm 旋转立臂式大底座	6.5X-65X 三目连续变焦	不同型号可选的
			WF10X/23mm可调节目镜	
			0.5Pro ctv	
			防尘物镜	
			144 LED 灯	
RF-6565PRO3		51cm 双臂 41cm 支柱 200mm*245mm 大双臂底座	6.5X-65X 三目连续变焦	不同型号可选的
			WF10X/23mm可调节目镜	
			0.5Pro ctv	
			防尘物镜	
			144 LED 灯	
RF-6565PROD2		240mm φ32mm 支柱 410*300mm 多功能铝合金维修底座	6.5X-65X 三目连续变焦	不同型号可选的
			WF10X/23mm可调节目镜	
			0.5Pro ctv	
			防尘物镜	
			144 LED 灯	

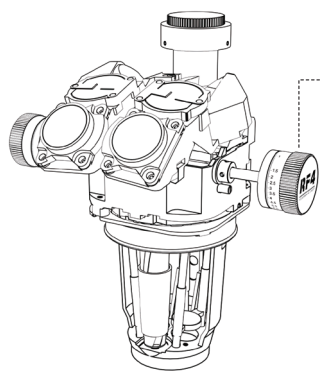

9 Gear Zoom Lock Knob

Let you stop bothering about the zoom,
Each gear is a precise multiple, fast and accurate.

9档变焦锁定旋钮

让你不再为变焦烦恼，每一个档位都是一个精确的倍数快速而准确。

ACCESSORIES

配件



0.5pro ctv



Dustproof len



144 LED Lamp

* (cable without plug)



RF-EM5

LENS



0.5X
objective lens




0.7X
objective lens



0.48X
objective lens

CAMERA



4KC1



2KC2PRO



2KC3

MONITOR



M156




YS010W



S101

I, Structure

- 1.Eyepieces glass
- 2.Adjustable Eyepieces
- 3.Zoom Control Knob
- 4.Objective lens
- 5.Camera
- 6.Base
- 7.Focusing knob
- 8.Round Column
- 9.Lens
- 10.Monitor
- 11.Eyepiece Rubber cover

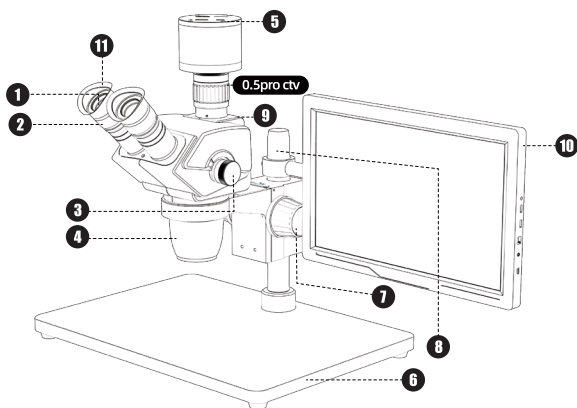






II, Different eyepieces match different magnifications of the same objective lens

Eyepiece	Standard Configuration		Auxiliary Observation					
			0.5X		0.7X		2X	
	Working Distance 105mm		Working Distance 177mm		Working Distance 123mm		Working Distance 30mm	
	Magnification	Field Of View	Magnification	Field Of View	Magnification	Field Of View	Magnification	Field Of View
10X/23 Standard Configuration	6.5X-65X	3.54-35.38mm	3.25X-32.5X	7.08-70.86mm	4.55X-45.5X	5.05-50.5mm	13X-130X	1.77-17.7mm
20X/12	13X-130X	1.85-18.46mm	6.5X-65X	3.69-36.92mm	9.1X-91X	2.68-26.37mm	26X-260X	0.92-9.23mm

TRINOCULAR STEREO MICROSCOPE

III, Comparison of different microscope

Model	Picture	Base and Boom Stand	Lens and Accessories	Camera and Display
RF-6565R		250mm ϕ 32mm pillar, 200mm*255mm Standard base	6.5X-65X trinocular continuous zoom	Different models optional
			WF10X/23mm Adjustable eyepieces	
			0.5Pro ctv	
			Dustproof len	
			144 LED Light	
RF-6565PRO		240mm ϕ 32mm pillar, 380 x260mm big base	6.5X-65X trinocular continuous zoom	Different models optional
			WF10X/23mm Adjustable eyepieces	
			0.5Pro ctv	
			Dustproof len	
			144 LED Light	
RF-6565PRO2		380 x260mm Rotating vertical arm type big base	6.5X-65X trinocular continuous zoom	Different models optional
			WF10X/23mm Adjustable eyepieces	
			0.5Pro ctv	
			Dustproof len	
			144 LED Light	
RF-6565PRO3		51cm double-arm 41cm high pillar, 200mm*245mm big double-arm base	6.5X-65X trinocular continuous zoom	Different models optional
			WF10X/23mm Adjustable eyepieces	
			0.5Pro ctv	
			Dustproof len	
			144 LED Light	
RF-6565PROD2		240mm ϕ 32mm pillar 410*300mm Multifunctional aluminum alloy repair base	6.5X-65X trinocular continuous zoom	Different models optional
			WF10X/23mm Adjustable eyepieces	
			0.5Pro ctv	
			Dustproof len	
			144 LED Light	