


拉手型号说明

Handle model description

拉手编码规则共 8 位，包含拉手型号 (LS511)、拉手长度(L)、原材料直径(D)、安装高度(H)、螺纹大小(M)、螺纹长度(h)、表面处理(G)、流水号 (001)

Naming principles for handle with 8 digits, including handle model (Ls511), handle length (L), raw material diameter (D), mounting height (H), thread size (M), thread length (h), surface finish (G), flow number (001)

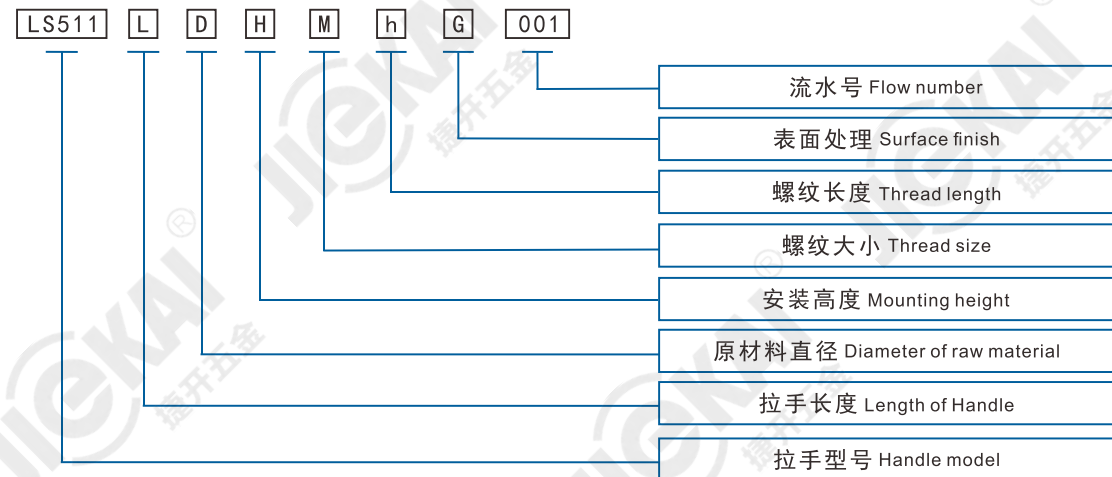

拉手安装示意图

Handle Installation Diagram




1 根据拉手两孔位置定位出位置

Position the two holes of the handle according to their location



2 根据拉手螺丝位置孔径大小开孔

Cut the hole according to the size of the hole in the handle screw position

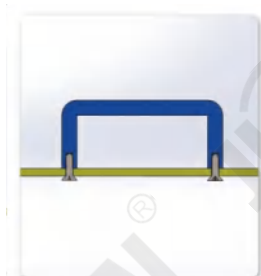

3 将螺丝拧进拉手

Screw the screws into the handle



4 安装完成


Finish the installation

如何选择螺丝钉长度

How to choose the length of the screws


木板厚度 Thickness of the wood panel	18mm	20mm	25mm	30mm	35mm
螺丝长度 Screw length	22mm	25mm	30mm	35mm	40mm

什么是拉手孔距?
What is the puller hole pitch?

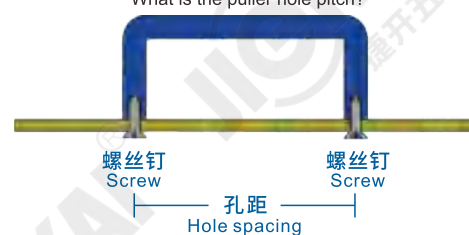

LS503系列

型号 Model	材质 Material	表面处理(G) Surface treatment
LS503	铁 Steel	1=铬 2=镍 3=锌 7=电泳 1=Chrome 2=Nickel 3=Zinc 7=Electrophoresis
SL503	不锈钢 Stainless steel	4=镜光 44=普光 4=Mirror Polishing 44=General Polishing

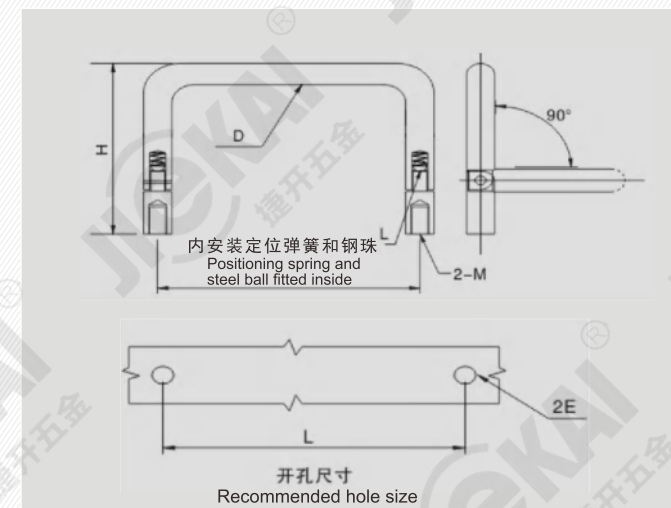


型号 Model	安装中心距 Installation center distance	原材料 Raw material	安装高度 Height	牙纹 Thread size	牙长 Thread length	开孔孔径 Hole diameter
代码 Code	L	D	H	M	h	E
LS503	72					
	80					
SL503	90	Φ 8.0	50	5	6	Φ 5.5
	100					
	120					

订货料号示范: LS503-L-D-H-M-h-G (其它规格可定制)
Demonstration of ordering number : LS503-L-D-H-M-h-G (Other specifications can be customized)

LS505系列

型号 Model	材质 Material	表面处理(G) Surface treatment
LS505	铁 Steel	1=铬 2=镍 3=锌 7=电泳 1=Chrome 2=Nickel 3=Zinc 7=Electrophoresis
SL505	不锈钢 Stainless steel	4=镜光 44=普光 4=Mirror Polishing 44=General Polishing

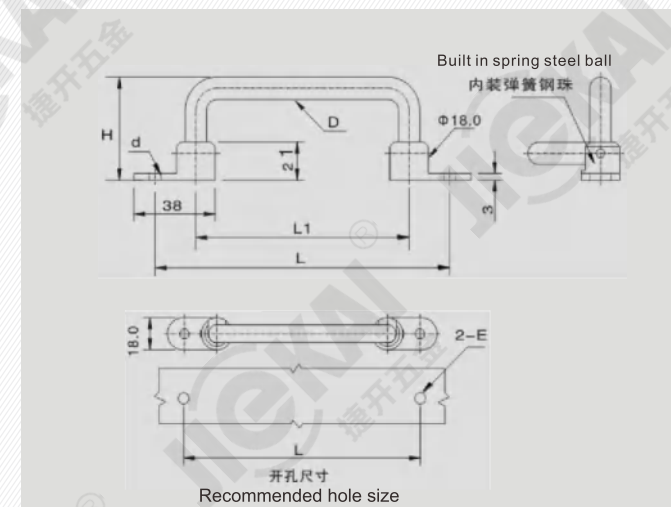


型号 Model	安装中心距 Installation center distance	拉手中距 Handle center distance	原材料 Raw material	安装高度 Height	安装孔 Mounting hole	开孔孔径 Hole diameter
代码 Code	L	L1	D	H	d	E
LS505	138	100				
	158	120				
SL505	180	142	Φ 10	46	Φ 5.5	Φ 5.5
	218	180				

订货料号示范: LS505-L-D-H-G (其它规格可定制)
Demonstration of ordering number : LS505-L-D-H-G (Other specifications can be customized)

LS506系列

型号 Model	品名 Product Name	材质 Material	表面处理(G) Surface treatment
LS506 LS506-2	折叠拉手 Folding handle	铁 Steel	1=铬 2=镍 7=电泳 1=Chrome 2=Nickel 7=Electrophoresis
SL506 SL506-2		不锈钢 Stainless steel	4=镜光 44=普光 4=Mirror Polishing 44=General Polishing

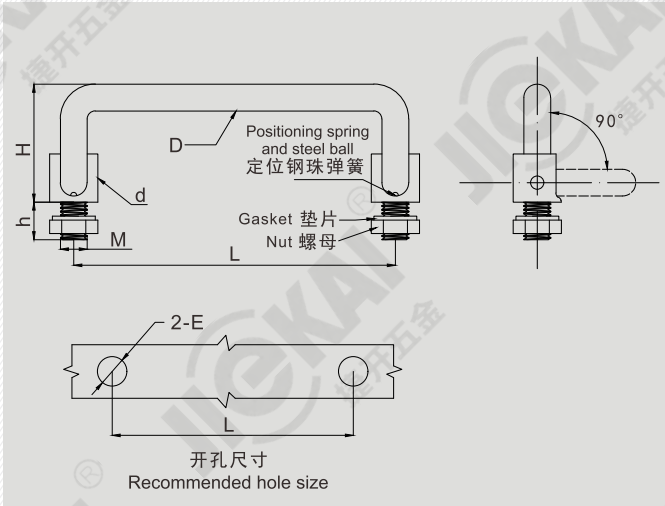


型号 Model	安装中心距 Installation center distance	原材料 Raw material	安装高度 Height	牙纹 Thread size	牙长 Thread length	套子外径 Outer diameter of the sleeve	开孔孔径 Hole diameter
代码 Code	L	D	H	M	h	d	E
LS506 SL506	90/100/119	Φ 8.8	41.5	M10	16	Φ 16	Φ 11
	120/135/149						
	155/160						
	100/120/180	Φ 10	44	M10	14	Φ 18	
LS506-2 SL506-2	55/60/70	Φ 6.0	32	M6	13	Φ 11	Φ 7.0
	84/90/100						
	102/122						

备注: 安装中心距表中数据为汇总尺寸, 请按需求订购! Note: The data in the table of installation center distance is the summary size, please order according to the demand!
订货料号示范: LS506-L-D-H-M-h-G (其它规格可定制) Demonstration of ordering number : LS506-L-D-H-M-h-G (Other specifications can be customized)

LS506J系列

型号 Model	品名 Product Name	材质 Material	表面处理(G) Surface treatment
LS506J	包胶折叠拉手 Folding handle series with rubber cover	铁 Steel	1=铬 2=镍 7=电泳 1=Chrome 2=Nickel 7=Electrophoresis
SL506J		不锈钢 Stainless steel	4=镜光 44=普光 4=Mirror Polishing 44=General Polishing

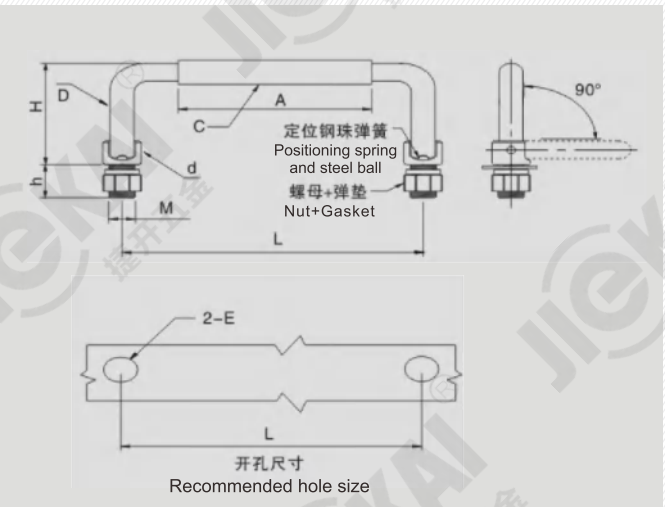


型号 Model	安装中心距 Installation center distance	原材料 Raw material	安装高度 Height	牙纹 Thread size	牙长 Thread length	套子外径 Outer diameter of the sleeve	开孔孔径 Hole diameter	包胶直径 Diameter of rubber sleeve	包胶长度 Length of rubber sleeve
代码 Code	L	D	H	M	h	d	E	C	A
LS506J SL506J	100	Φ 9.0	41.5	M10	16	Φ 16	Φ 11	Φ 12.8	77
	119	Φ 8.8						Φ 18	90
	120								
	119		75		30				

订货料号示范: LS506J-L-D-H-M-h-G (其它规格可定制) Demonstration of ordering number : LS506J-L-D-H-M-h-G (Other specifications can be customized)

LS507系列


型号 Model	品名 Product Name	材质 Material	表面处理(G) Surface treatment
LS507	外牙拉手 External thread	铁 Steel	1=铬 2=镍 7=电泳 1=Chrome 2=Nickel 7=Electrophoresis
SL507		不锈钢 Stainless steel	4=镜光 44=普光 4=Mirror Polishing 44=General Polishing
LS507Z	带底座外牙拉手 External thread with base	铁 Steel	1=铬 2=镍 7=电泳 1=Chrome 2=Nickel 7=Electrophoresis
SL507Z		不锈钢 Stainless steel	4=镜光 44=普光 4=Mirror Polishing 44=General Polishing

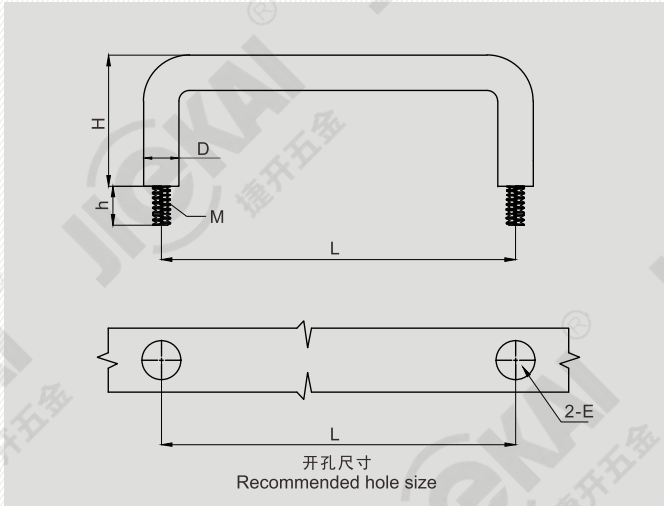

型号 Model	安装中心距 Installation center distance	原材料 Raw material	安装高度 Height	牙纹 Thread size	牙长 Thread length	底座规格 Base specification	开孔孔径 Hole diameter
代码 Code	L	D	H	M	h		E
LS507 SL507	68/75/90 100/120/150	Φ 8.0	40	M6	15		Φ 7.0
	80/100/110 120/125/160 200/250	Φ 10.0	37	M5	11		Φ 6.0
	备注: 安装中心距表中数据为汇总尺寸, 请按需求订购! Note: The data in the table of installation center distance is the summary size, please order according to the demand!						
LS507Z SL507Z	拉手其它尺寸不变两脚各增加一个底座, 增加后拉手整体美观增强(适合原材料为Φ 8.0拉手) The other dimensions of the handle remain unchanged, the base of each of the two feet is increased, and the overall beauty of the handle is enhanced after the increase (suitable for the raw materialΦ 8.0)					Φ 15*3.5	
订货料号示范: LS507-L-D-H-M-h-G (其它规格可定制) Demonstration of ordering number : LS507-L-D-H-M-h-G (Other specifications can be customized)							

LS507J系列


型号 Model	品名 Product Name	材质 Material	表面处理(G) Surface treatment
LS507J	包胶外牙拉手 External thread with rubber cover	铁 Steel	1=铬 2=镍 7=电泳 1=Chrome 2=Nickel 7=Electrophoresis
SL507J		不锈钢 Stainless steel	4=镜光 44=普光 4=Mirror Polishing 44=General Polishing
LS507JZ	带底座包胶 外牙拉手 Rubber coating with base external thread	铁 Steel	1=铬 2=镍 7=电泳 1=Chrome 2=Nickel 7=Electrophoresis
SL507JZ		不锈钢 Stainless steel	4=镜光 44=普光 4=Mirror Polishing 44=General Polishing

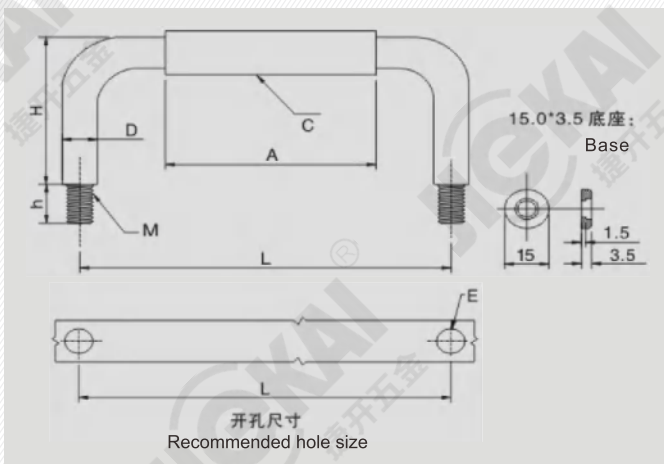

型号 Model	安装中心距 Installation center distance	原材料 Raw material	安装高度 Height	牙纹 Thread size	牙长 Thread length	底座规格 Base specification	开孔孔径 Hole diameter	包胶直径 Diameter of rubber sleeve	包胶长度 Length of rubber sleeve
代码 Code	L	D	H	M	h		E	C	A
LS507J SL507J	100	Φ 9.0	40	M6	15		Φ 7.0	Φ 12.8	77
	119	Φ 8.8	40	M6	15		Φ 9.0	Φ 18	90
	120	Φ 8.8	40	M6	15		Φ 7.0	Φ 18	90
备注: 上表为包胶拉手部分规格, LS507系列拉手均可包胶, 具体请咨询我司。 Note: The above table is part of the specifications of the rubber covered handle, LS507 serieshandles can be recovered with rubber. Please consult our company for details.									
LS507JZ SL507JZ	拉手其它尺寸不变两脚各增加一个底座, 增加后拉手整体美观增强 The other dimensions of the handle remain unchanged, the base of each of the two feet is increased, and the overall beauty of the handle is enhanced after the increase					Φ 15*3.5	Φ 7.0		
订货料号示范: LS507J-L-D-H-M-h-G (其它规格可定制) Demonstration of ordering number : LS507J-L-D-H-M-h-G (Other specifications can be customized)									

LS508系列

型号 Model	材质 Material	表面处理(G) Surface treatment
LS508	铁 Steel	1=铬 2=镍 1=Chrome 2=Nickel
SL508	不锈钢 Stainless steel	4=镜光 44=普光 4=Mirror Polishing 44=General Polishing

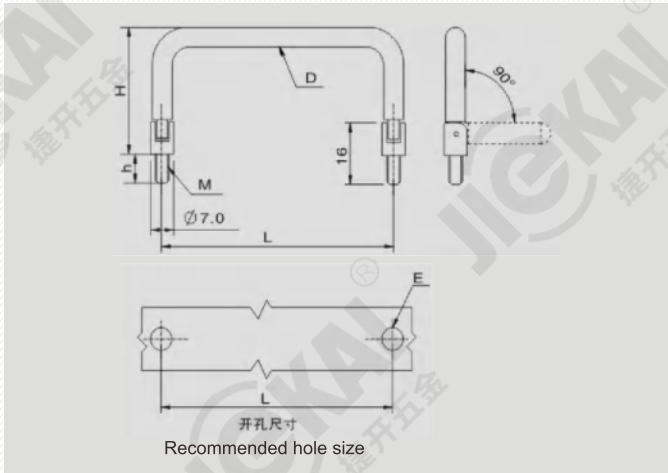


型号 Model	安装中心距 Installation center distance	原材料 Raw material	安装高度 Height	牙纹 Thread size	牙长 Thread length	开孔孔径 Hole diameter
代码 Code	L	D	H	M	h	E
LS508 SL508	55	Φ 6.0	25	M4	8	Φ 4.5
	60					
	70					
	74					
	84					
	90					
	100					
	102					
	122					
	138					

订货料号示范:LS508-L-D-H-M-h-G (其它规格可定制) Demonstration of ordering number : LS508-L-D-H-M-h-G (Other specifications can be customized)

LS509系列

型号 Model	材质 Material	表面处理(G) Surface treatment
LS509	铁 Steel	1=铬 2=镍 1=Chrome 2=Nickel
SL509	不锈钢 Stainless steel	4=镜光 44=普光 4=Mirror Polishing 44=General Polishing

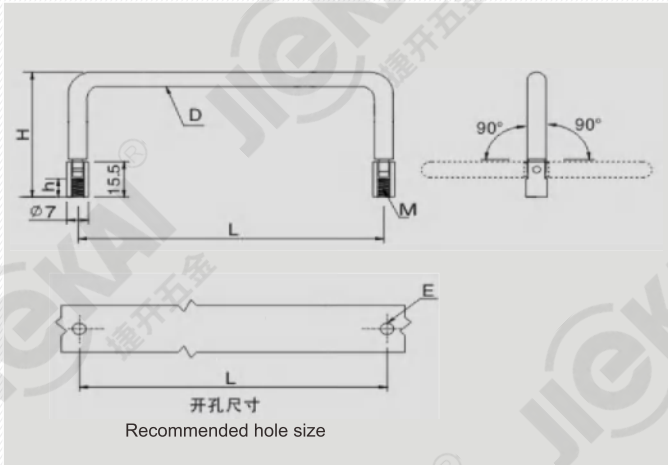


型号 Model	安装中心距 Installation center distance	原材料 Raw material	安装高度 Height	牙纹 Thread size	牙长 Thread length	开孔孔径 Hole diameter
代码 Code	L	D	H	M	h	E
LS509 SL509	55	Φ 6.0	44	M4	6	Φ 4.5
	60					
	70					
	74					
	84					
	90					
	100					
	102					
	122					
	138					

订货料号示范:LS509-L-D-H-M-h-G (其它规格可定制) Demonstration of ordering number : LS509-L-D-H-M-h-G (Other specifications can be customized)

SL512系列

型号 Model	品名 Product Name	材质 Material	表面处理(G) Surface treatment
SL512	椭圆不锈钢拉手 Oval stainless steel handle	不锈钢 Stainless steel	4=镜光 44=普光 6=喷砂 9=拉丝 4=Mirror Polishing 44=General Polishing 6=Sandblasting 9=blushed

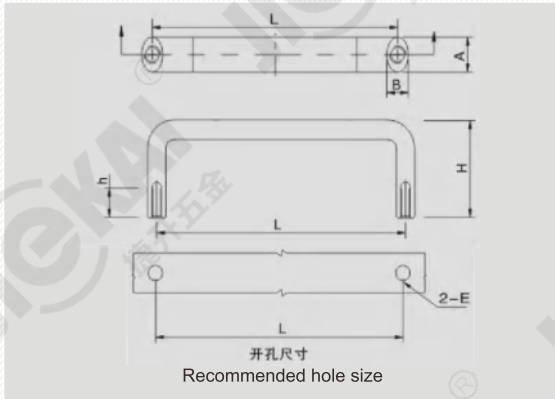


型号 Model	安装中心距 Installation center distance	椭圆材料规格 Oval material specification	安装高度 Height	牙纹 Thread size	牙长 Thread length	开孔孔径 Hole diameter
代码 Code	L	A B	H	M	h	E
SL512	80/90/100	12 8	40	M5	13	Φ 5.5
	120/125/160		35	M5	6	Φ 5.5
	200/250		40		8	
	90/100	16 10	47	M6	10	Φ 7.0
	120		49			
	75/100		51			
	112	20 13	53	M8	12	Φ 9.0
	120/128/160		55			
	112		57			
	120/128					
	160/180/192	26 17				
	300/350/400					

备注:安装中心距表中数据为汇总尺寸, 请按需订购! Note: The data in the table of installation center distance is the summary size, please order according to the demand!

订货料号示范:SL512-A*B-H-M-h-G (其它规格可定制) Demonstration of ordering number : SL512-A*B-H-M-h-G (Other specifications can be customized)

LS515系列

型号 Model	材质 Material	表面处理(G) Surface treatment
LS515	铁 Steel	1=铬 2=镍 7=电泳 1=Chrome 2=Nickel 7=Electrophoresis
SL515	不锈钢 Stainless steel	4=镜光 44=普光 4=Mirror Polishing 44=General Polishing

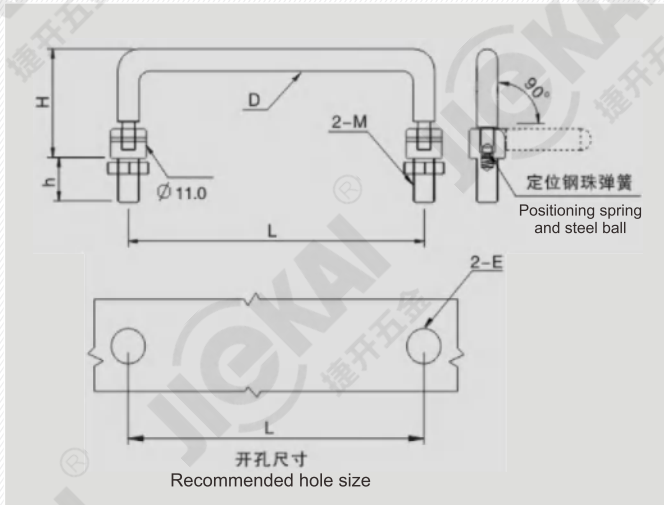


型号 Model	安装中心距 Installation center distance	原材料 Raw material	安装高度 Height	牙纹 Thread size	牙长 Thread length	开孔孔径 Hole diameter
代码 Code	L	D	H	M	h	E
LS515 SL515	90	Φ 6.5	37.5	6	14	Φ 7.0
	100					
	101.5					

订货料号示范:LS515-L-D-H-M-h-G (其它规格可定制) Demonstration of ordering number : LS515-L-D-H-M-h-G (Other specifications can be customized)

LS511J系列


型号 Model	品名 Product Name	材质 Material	表面处理(G) Surface treatment
LS511J	包胶圆形拉手 Round handle with rubber cover	铁 Steel	1=铬 2=镍 7=电泳 1=Chrome 2=Nickel 7=Electrophoresis
SL511J		不锈钢 Stainless steel	4=镜光 44=普光 4=Mirror Polishing 44=General Polishing
LS511JZ	带底座包胶圆形拉手 Round handle with base and rubber cover	铁 Steel	1=铬 2=镍 7=电泳 1=Chrome 2=Nickel 7=Electrophoresis
SL511JZ		不锈钢 Stainless steel	4=镜光 44=普光 4=Mirror Polishing 44=General Polishing

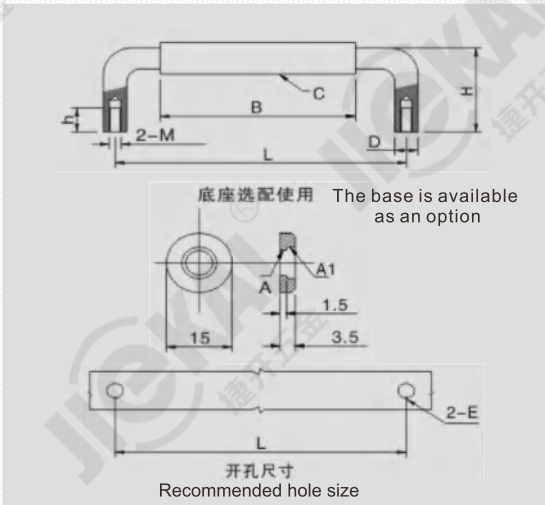

型号 Model	安装中心距 Installation center distance	原材料 Raw material	安装高度 Height	牙纹 Thread size	牙长 Thread length	开孔孔径 Hole diameter	包胶直径 Diameter of rubber sleeve	包胶长度 Length of rubber sleeve	底座内径 Inner diameter of base			
代码 Code	L	D	H	M	h	E	C	B	A	A1		
LS511J SL511J	100	Φ 9.0	32	M5	10	Φ 6.0	Φ 12.7	77				
	120	Φ 8.8	40				Φ 18	90				
	75	Φ 8.0	40				Φ 9.3	45				
	90		32					60				
	100		32					70				
	100	Φ 9.0	32				Φ 10.4	60				
	119		40					89				
	100		37					70				
	120		37				Φ 11.5	90				
	150	Φ 12.0	52	M8			Φ 9.0	Φ 13.5	119			
备注：上表为包胶拉手部分规格，LS511系列外径为8.9.10.12的拉手均可以包胶，具体请咨询我司。							Remarks: The above table shows some specifications of rubber covered handles. LS511 series handles with an outer diameter of 8mm.9mm.10mm.12mm can be rubber covered handle. Please consult our company for details.					
LS511JZ		Φ 9.0	拉手尺寸依上图不变，此系列型号增加底座2个，可根据需求选配						Φ 6.5	Φ 9.2		
SL511JZ		Φ 10.0	The handle size remains the same as the picture above. This series of models adds 2 discs, which can be selected according to requirements.						Φ 6.5	Φ 10.2		
		Φ 12.0							Φ 8.5	Φ 12.2		
订货料号示范：LS511J-L-D-H-M-h-G（其它规格可定制） Demonstration of ordering number : LS511J-L-D-H-M-h-G (Other specifications can be customized)												

LS511系列

型号 Model	品名 Product Name	材质 Material	表面处理(G) Surface treatment
LS511	圆形拉手 Round handle	铁 Steel	1=铬 2=镍 7=电泳 10=端面铣削型 1=Chrome 2=Nickel 7=Electrophoresis 10=Milling
LS511AL		铝 Aluminium	4=镜光 5=氧化 8=烤漆 10=端面铣削型 4=Mirror Polishing 5=Oxidation 8=Baking paint 10=Milling
SL511		不锈钢 Stainless steel	4=镜光 44=普光 10=端面铣削型 4=Mirror Polishing 44=General Polishing 10=Milling
LS511Z	带底座圆形拉手 Round handle with base and rubber cover	铁 Steel	1=铬 7=电泳 1=Chrome 7=Electrophoresis
SL511Z		不锈钢 Stainless steel	4=镜光 44=普光 7=电泳 4=Mirror Polishing 44=General Polishing 7=Electrophoresis

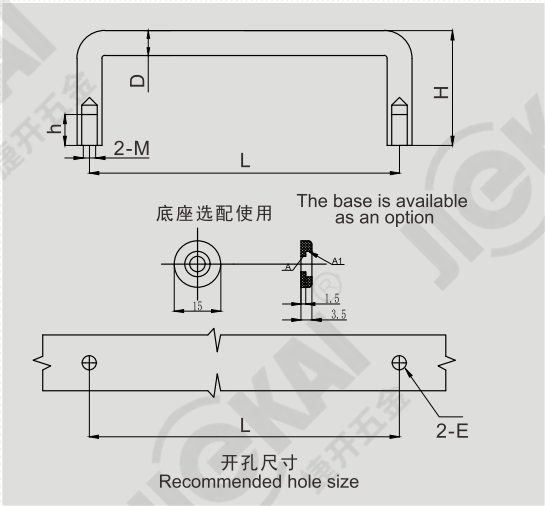


型号 Model	安装中心距 Installation center distance	原材料 Raw material	安装高度 Height	牙纹 Thread size	牙长 Thread length	开孔孔径 Hole diameter	底座内径 Inner diameter of base	底座内径 Inner diameter of base
代码 Code	L	D	H	M	h	E	A	A1
LS511 SL511	40/60	Φ 6.0	22	M4	7	Φ 4.5		
	55/60/82		26		8			
	70/80/90/100		32		10			
	102/122/138		43		8			
	48/66	Φ 7.0	30	M5	8	Φ 5.5		
	68	Φ 8.0	32	M5	10			
	60/90/100/120		40	M4	8			
	75/150		45	M5	10	Φ 5.5		
	48/66	32						
	90/100/135/155	40						
	119/149/160	50						
100								
备注: 安装中心距表中数据为汇总尺寸, 请按需订购! Note: The data in the table of installation center distance is the summary size, please order according to the demand!								
LS511Z		Φ 9.0	拉手尺寸依上图不变, 此系列型号增加底座2个, 可根据需求选配 The handle size remains the same as the picture above. This series of models adds 2 discs, which can be selected according to requirements.				Φ 6.5	Φ 9.2
SL511Z								
订货料号示范: LS511-L-D-H-M-h-G (其它规格可定制) Demonstration of ordering number : LS511-L-D-H-M-h-G (Other specifications can be customized)								

型号 Model	安装中心距 Installation center distance	原材料 Raw material	安装高度 Height	牙纹 Thread size	牙长 Thread length	开孔孔径 Hole diameter	底座内径 Inner diameter of base	底座内径 Inner diameter of base	
代码 Code	L	D	H	M	h	E	A	A1	
LS511 LS511AL SL511	80	Φ 10.0	37	M5	10	Φ 5.5			
	96		60	M4		Φ 4.5			
	100 48/66		37	M5		Φ 5.5			
	110		37	M6		Φ 7.0			
			60			M5			Φ 5.5
			40			M5			Φ 7.0
	120		37	M6		Φ 5.5			
			60	M5		Φ 7.0			
	128		35	M4		Φ 5.5			
	160		35	M5		Φ 4.5			
			37			Φ 5.5			
	192		60	M4		Φ 4.5			
			37			M5			Φ 5.5
	200		60	M5		Φ 5.5			
	224		35	M4		Φ 4.5			
	250		37	M5		Φ 5.5			
	150	188	Φ 12.0	50	M8	10			Φ 9.0
				52					
				87					
				50					
				52					
				87					
				50					
				52					
	238	288		87					
				50					
52									
87									
LS511AL	150	Φ 19.0	60	M6	12	Φ 7.0			
	170								
	190								
	203								
	230								
LS511Z		Φ 10.0	拉手尺寸依上图不变, 此系列型号增加底座2个, 可根据需求选配				Φ 6.5	Φ 10.2	
SL511Z		Φ 12.0	The handle size remains the same as the picture above. This series of models adds 2 discs, which can be selected according to requirements.				Φ 8.5	Φ 12.2	
订货料号示范:LS511-L-D-H-M-h-G(其它规格可定制) Demonstration of ordering number : LS511-L-D-H-M-h-G (Other specifications can be customized)									

LS516AL系列

型号 Model	品名 Product Name	材质 Material	表面处理(G) Surface treatment
LS516AL	椭圆铝拉手 Oval Aluminium handle	铝 Aluminium	4=镜光 5=氧化 6=喷砂 8=烤漆 4=Mirror Polishing 5=Oxidation 6=Sandblasting 8=Baking paint

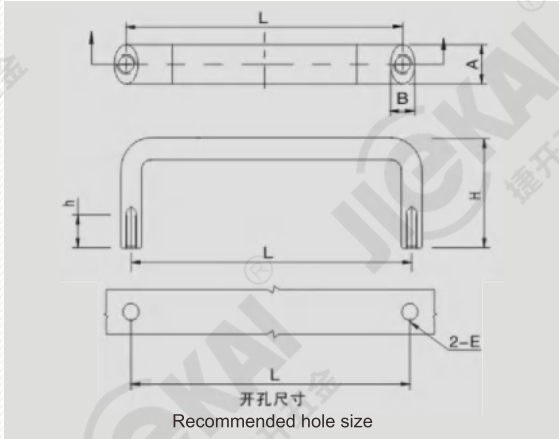


型号 Model	安装中心距 Installation center distance	椭圆材料规格 Oval material specification		安装高度 Height	牙纹 Thread size	牙长 Thread length	开孔孔径 Hole diameter
代码 Code	L	A	B	H	M	h	E
LS516AL	75/100/125	16	8	38	M5	10	Φ 6.0
	150/175			40			
	30/64/96/128			38.1			
	120	16	13	56.5	M8	12	Φ 9.0
	75/100			47			
	112			49			
	120/128/160	20	13	51	M6	10	Φ 7.0
	112			53			
	120/128			55	M8	12	Φ 9.0
	160/180/192 300/350/400			57			

备注:安装中心距表中数据为汇总尺寸, 请按需订购! Note: The data in the table of installation center distance is the summary size, please order according to the demand!
订货料号示范:LS516AL-L-A*B-H-M-h-G (其它规格可定制) Demonstration of ordering number : LS516AL-L-A*B-H-M-h-G (Other specifications can be customized)

LS519系列

型号 Model	品名 Product Name	材质 Material	表面处理(G) Surface treatment
LS519	折叠拉手 Folding handle	铁 Steel	1=铬 2=镍 1=Chrome 2=Nickel

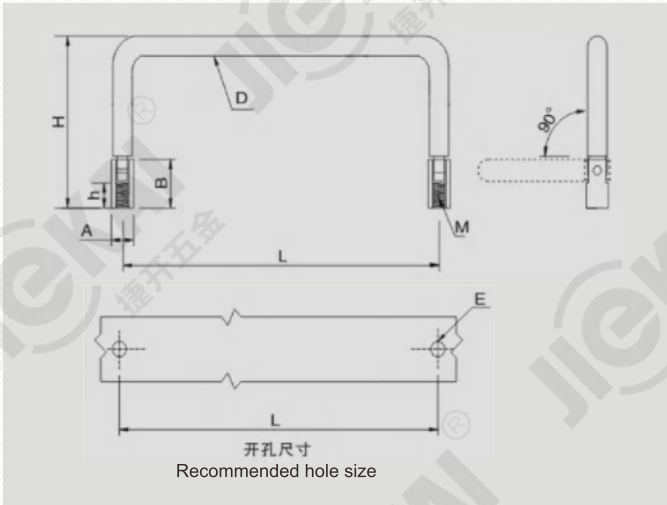


型号 Model	安装中心距 Installation center distance	原材料 Raw material	安装高度 Height	牙纹 Thread size	牙长 Thread length	开孔孔径 Hole diameter	头套直径 Head part diameter	头套长度 Head part length
代码 Code	L	D	H	M	h	E	A	B
LS519	51	Φ 6.0	27	M3	6	Φ 3.5	Φ 7.0	11
	60		35				Φ 6.0	11
	73		44.5				Φ 6.0	12
	30	Φ 6.35	37.3	M3	7	Φ 3.5	Φ 7.0	11
	55	Φ 6.35	42.3	6-32	6	Φ 4.0	Φ 7.0	11

订货料号示范:LS519-L-D-H-M-h-G (其它规格可定制) Demonstration of ordering number : LS519-L-D-H-M-h-G (Other specifications can be customized)

LS517系列

型号 Model	品名 Product Name	材质 Material	表面处理(G) Surface treatment
LS517	四方铁拉手 Square steel handle	铁 Steel	1=铬 2=镍 7=电泳 1=Chrome 2=Nickel 7=Electrophoresis
LS517AL	四方铝拉手 Square aluminum handle	铝 Aluminium	5=氧化 6=喷砂 8=烤漆 5=Oxidation 6=Sandblasting 8=Baking paint
SL517	四方不锈钢拉手 Square stainless steel handle	不锈钢 Stainless steel	4=镜光 44=普光 6=喷砂 9=拉丝 4=Mirror Polishing 44=General Polishing 6=Sandblasting 9=blushed

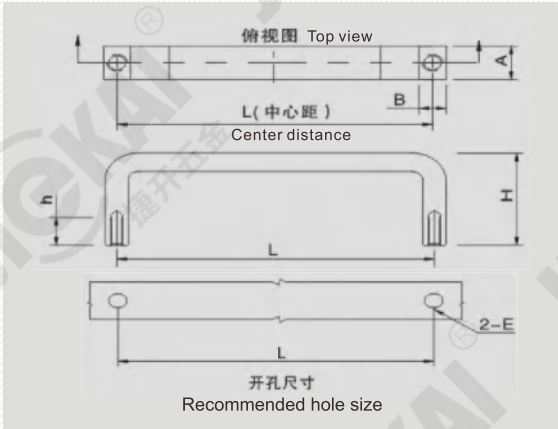


型号 Model	安装中心距 Installation center distance	椭圆材料规格 Oval material specification		安装高度 Height	牙纹 Thread size	牙长 Thread length	开孔孔径 Hole diameter
代码 Code	L	A	B	H	M	h	E
LS517 LS517AL	80	12	8	40	M5	13	Φ 6.0
	100						
	125						
	160						
	200						
SL517	250	14	8	30	M5	10	Φ 6.0
	80						
	112						
	128						
	150						
	200	20	10	45	M6	10	Φ 7.0
	250						
	350						

订货料号示范:LS517-A*B-H-M-h-G (其它规格可定制) Demonstration of ordering number : LS517-A*B-H-M-h-G (Other specifications can be customized)

LS520系列

型号 Model	品名 Product Name	材质 Material	表面处理(G) Surface treatment
SL520	不锈钢外装拉手 External mount stainless steel handle	不锈钢 Stainless steel	4=镜光 44=普光 6=喷砂 9=拉丝 4=Mirror Polishing 44=General Polishing 6=Sandblasting 9=blushed
LS520AL	外装椭圆铝拉手 External oval aluminium handle	铝 Aluminium	4=镜光 5=氧化 6=喷砂 8=烤漆 4=Mirror 5=Oxidation 6=Sandblasting 8=Baking paint

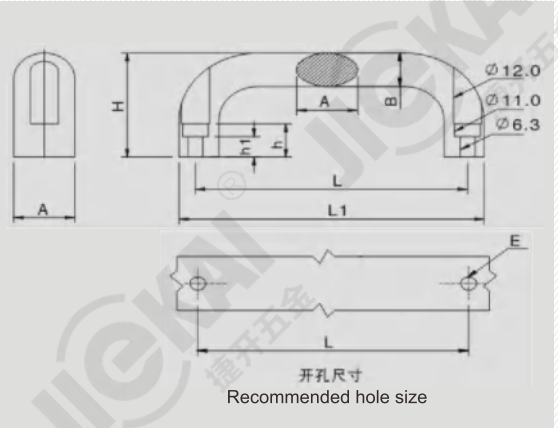


型号 Model	安装中心距 Installation center distance	椭圆材料规格 Oval material specification		总高度 Total height	内孔长度 Inner hole length		总宽度 Total width	开孔孔径 Hole diameter
代码 Code	L	A	B	H	h	h1	L1	E
SL520	100	26	17	47	17	10.5	114	Φ 7.5
	116			53			130	
	120			53			134	
	132			55			146	
	150			67			164	
	164			57			178	
	196			57			210	

订货料号示范:SL520-L-A*B-H-G (其它规格可定制) Demonstration of ordering number : SL520-L-A*B-H-G (Other specifications can be customized)

LS521系列

型号 Model	品名 Product Name	材质 Material	表面处理(G) Surface treatment
SL521	不锈钢斜拉手 Stainless steel slanted handle	不锈钢 Stainless steel	4=镜光 44=普光 6=喷砂 9=拉丝 4=Mirror Polishing 44=General Polishing 6=Sandblasting 9=blushed
LS521AL	铝椭圆斜拉手 Aluminum elliptical slanted handle	铝 Aluminium	4=镜光 5=氧化 6=喷砂 8=烤漆 4=Mirror 5=Oxidation 6=Sandblasting 8=Baking paint

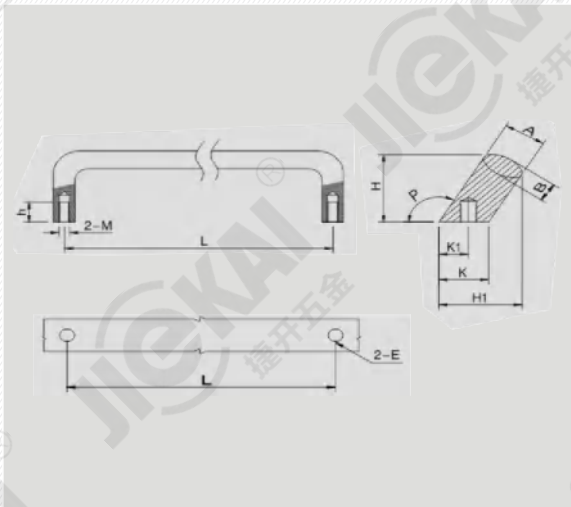


型号 Model	安装中心距 Installation center distance	椭圆材料规格 Oval material specification		总高度 Total height	内孔长度 Inner hole length		宽度 Width	平面尺寸 Plane size		角度 Angle	开孔孔径 Hole diameter
代码 Code	L	A	B	H	M	h	H1	K	K1	P	E
SL521 LS521AL	100	26	17	54	M8	12	47.4	28.7	14.3	115°	Φ 9.0
	128										
	160										
	112	20	13	48	M6	10	39.5	22.5	11.5	Φ 7.0	
	128										
	114			41	M6	12	40	24	13.5		
	152										
	203										

订货料号示范:SL521-L-A*B-H-M-h-G(其它规格可定制) Demonstration of ordering number : SL521-L-A*B-H-M-h-G (Other specifications can be customized)

LS522系列

型号 Model	品名 Product Name	材质 Material	表面处理(G) Surface treatment
LS522AL	外装椭圆铝拉手 External oval aluminium handle	铝 Aluminium	4=镜光 5=氧化 6=喷砂 8=烤漆 4=Mirror 5=Oxidation 6=Sandblasting 8=Baking paint

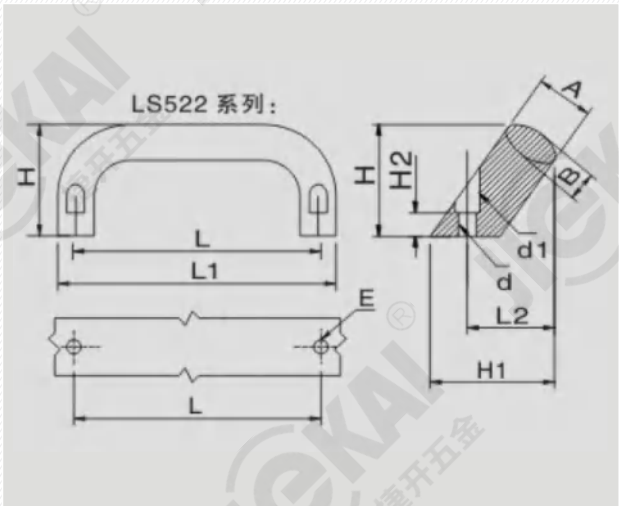


型号 Model	安装中心距 Installation center distance	椭圆材料规格 Oval material specification		总高度 Total height	内孔大小 Inner hole size		宽度 Width	平面尺寸 Plane size		开孔孔径 Hole diameter
代码 Code	L	A	B	H	d	d1	H1	L1	H2	E
LS522AL	112	20	13	48	Φ 6.5	Φ 10.5	50	125	7	Φ 7.5

订货料号示范:LS522AL-L-A*B-H-G(其它规格可定制) Demonstration of ordering number : LS522AL-L-A*B-H-G (Other specifications can be customized)

LS523系列

型号 Model	品名 Product Name	材质 Material	表面处理(G) Surface treatment
LS523AL	外装椭圆铝拉手 External oval aluminium handle	铝 Aluminium	4=镜光 5=氧化 6=喷砂 8=烤漆 4=Mirror 5=Oxidation 6=Sandblasting 8=Baking paint

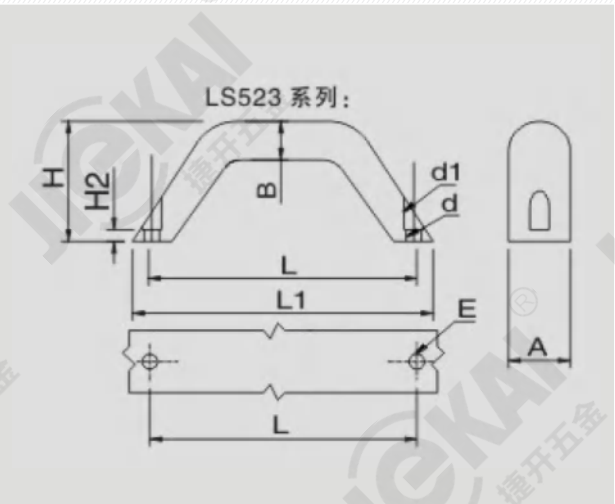


型号 Model	安装中心距 Installation center distance	椭圆材料规格 Oval material specification		总高度 Total height	内孔大小 Inner hole size		平面尺寸 Plane size		开孔孔径 Hole diameter
代码 Code	L	A	B	H	d	d1	L1	H2	E
LS523AL	90	19	12	41	Φ 5.3	Φ 9	107	5	Φ 6.3
	93.5	20	13	44	Φ 6.5	Φ 10.5	112	5	Φ 7.5
	130	26	17	57	Φ 8.5	Φ 13.5	149	5	Φ 9.5

订货料号示范:LS523AL-L-A*B-H-G(其它规格可定制) Demonstration of ordering number : LS523AL-L-A*B-H-G (Other specifications can be customized)

SL525系列

型号 Model	材质 Material	表面处理(G) Surface treatment
SL525	不锈钢 Stainless steel	4=镜光 44=普光 6=喷砂 9=拉丝 4=Mirror Polishing 44=General Polishing 6=Sandblasting 9=blushed

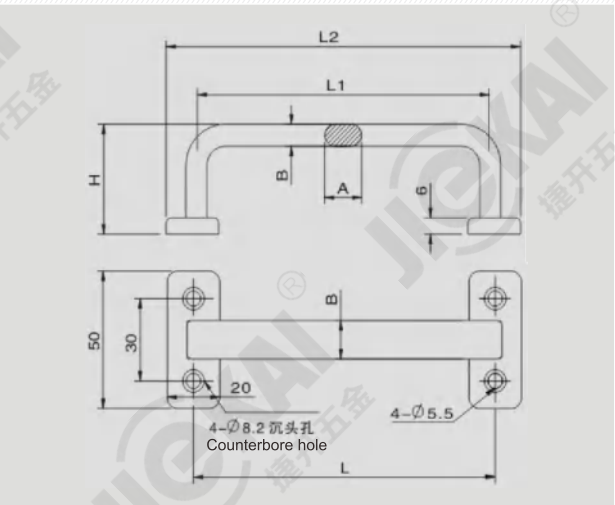

型号 Model	安装中心距 Installation center distance	椭圆材料规格 Oval material specification		安装高度 Height	拉手中心距 Handle center distance	拉手总长 Total length of handle	开孔孔径 Hole diameter
代码 Code	L	A	B	H	L1	L2	E
SL525	100	14	8	40	97	120	Φ 6.0
	115				112	135	
	125				122	145	
	160				157	180	
	200				197	220	

订货料号示范:SL525-L-A*B-H-G(其它规格可定制) Demonstration of ordering number : SL525-L-A*B-H-G (Other specifications can be customized)

电源锁
Key switch lock

转舌锁
Cam lock

圆柱锁
Quarter turn lock

连杆锁
Rob control lock

平面锁
Plane lock

把手锁
Handle lock

面板锁
Panel lock

拉手
Handles

限位
Door stop

外装铰链
External hinge

内装铰链
Internal hinge


搭扣
Toggle lock

密封条
Gasket

配件
Accessories

SL526系列


型号 Model	材质 Material	表面处理(G) Surface treatment
SL526	不锈钢 Stainless steel	4=镜光 44=普光 4=Mirror Polishing 44=General Polishing

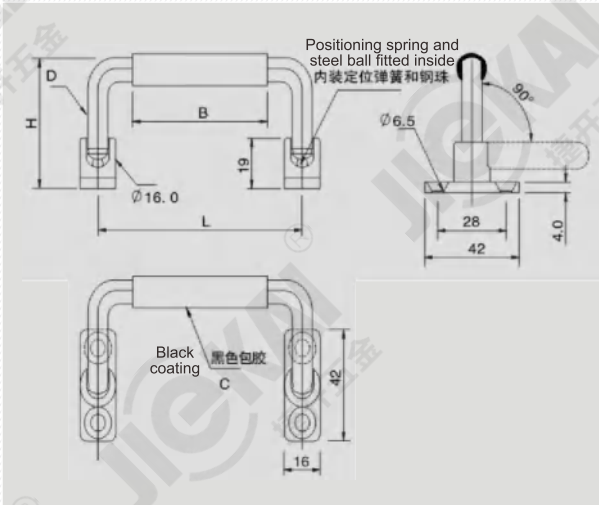

型号 Model	安装中心距 Installation center distance	原材料 Raw material	安装高度 Height	包胶直径 Diameter of rubber sleeve	包胶长度 Length of rubber sleeve	开孔孔径 Hole diameter
代码 Code	L	D	H	C	B	E
SL526	100	Φ 9.0	49	Φ 12.7	77	Φ 7.5
订货料号示范:SL526-L-D-H-G (其它规格可定制) Demonstration of ordering number :SL526-L-D-H-G (Other specifications can be customized)						

LS532系列


型号 Model	品名 Product Name	材质 Material	表面处理(G) Surface treatment
LS532	铁拉手 Steel handle	铁 Steel	1=铬 2=镍 7=电泳 1=Chrome 2=Nickel 7=Electrophoresis
SL532	不锈钢拉手 Stainless steel handle	不锈钢 Stainless steel	4=镜光 44=普光 4=Mirror Polishing 44=General Polishing
LS532AL	铝拉手 Aluminium handle	铝 Aluminium	4=镜光 5=氧化 6=喷砂 8=烤漆 4=Mirror 5=Oxidation 6=Sandblasting 8=Baking paint
LS532Z	带底座拉手 Handle with base	以上3种 Above 3	1=铬 4=镜光 7=电泳 1=Chrome 4=Mirror 7=Electrophoresis

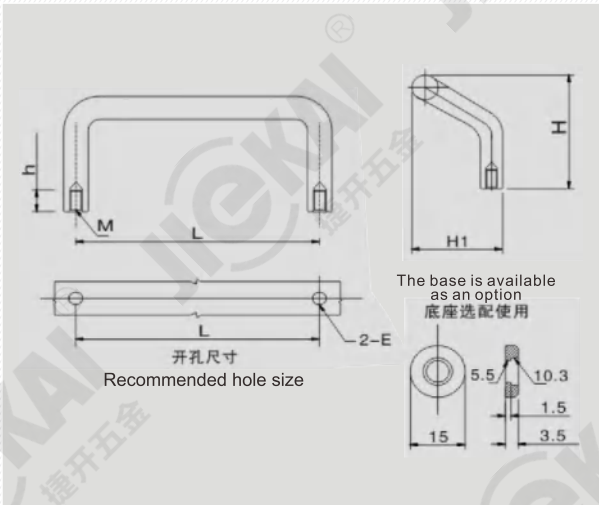

型号 Model	安装中心距 Installation center distance	原材料 Raw material	安装高度 Height	牙纹 Thread size	牙长 Thread length	宽度 Width	开孔孔径 Hole diameter					
代码 Code	L	D	H	M	h	H1	E					
LS532 SL532	60	Φ 6.0	30	M4	7	16	Φ 5.0					
	80		31.5		10	18						
	100	Φ 8.0	32									
	120		40									
LS532	48/66/88	Φ 10.0	47	M5	13	40	Φ 6.0					
SL532	100/110/120											
LS532AL	125/160											
备注:安装中心距表中数据为汇总尺寸, 请按需订购! Note: The data in the table of installation center distance is the summary size, please order according to the demand!												
LS532Z	Φ 15.0		此规格型号拉手尺寸依上图不变, 增加底座2个, 可根据需求选配。底座规格为: Φ15.0*3.5(适合外径为: Φ10拉手) The handle size remains the same as the picture above. This series of models adds 2 discs, which can be selected according to requirements. Base specification: Φ 15.0*3.5(Suitable outer diameter is Φ 10 handle).									
SL532Z												
LS532ALZ												
订货料号示范:LS532-L-D-H-M-h-G (其它规格可定制) Demonstration of ordering number : LS532-L-D-H-M-h-G (Other specifications can be customized)												

LS531系列


型号 Model	材质 Material	表面处理(G) Surface treatment
LS531	铁 Steel	1=铬 2=镍 7=电泳 1=Chrome 2=Nickel 7=Electrophoresis
SL531	不锈钢 Stainless steel	4=镜光 44=普光 4=Mirror Polishing 44=General Polishing

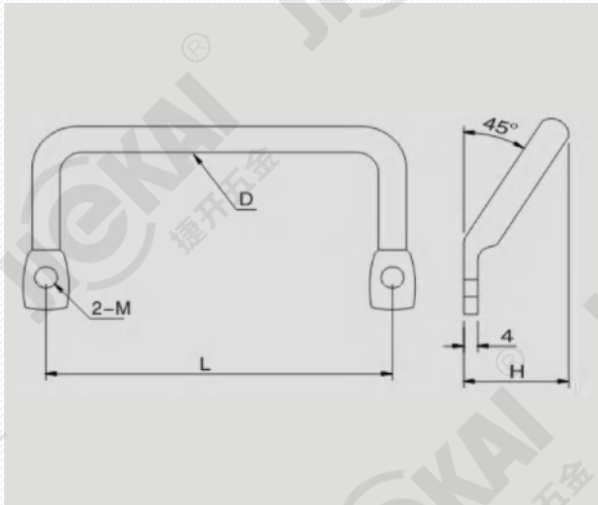

型号 Model	安装中心距 Installation center distance	原材料 Raw material	安装高度 Height	牙纹 Thread size	开孔孔径 Hole diameter
代码 Code	L	D	H	M	h
LS531	90	Φ 8.0	35	Φ 6.5	Φ 7.5
SL531	100				
	120				
SL531	112				
订货料号示范:LS531-L-D-H-M-G(其它规格可定制) Demonstration of ordering number : LS531-L-D-H-M-G (Other specifications can be customized)					

LS533系列


型号 Model	品名 Product Name	材质 Material	表面处理(G) Surface treatment
LS533	焊接铁拉手 Welded iron handle	铁 Steel	1=铬 2=镍 7=电泳 8=烤漆 1=Chrome 2=Nickel 7=Electrophoresis 8=Baking paint
SL533	焊接不锈钢拉手 Welded stainless steel handle	不锈钢 Stainless steel	4=镜光 44=普光 4=Mirror Polishing 44=General Polishing

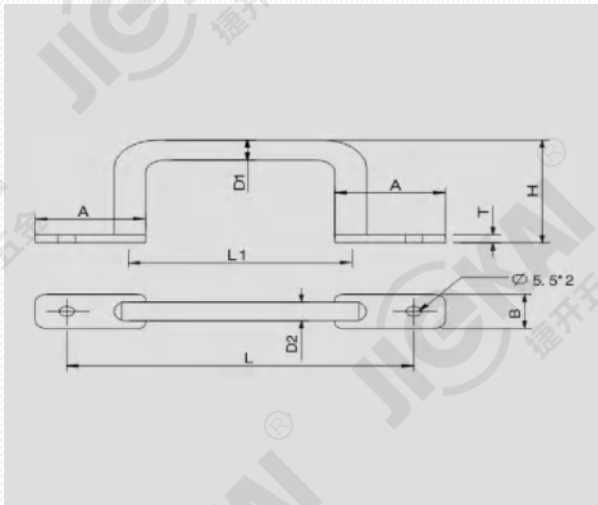

型号 Model	安装中心距 Installation center distance		原材料(D) Raw material		安装高度 Height	底座规格 Base specification		
代码 Code	L	L1	D1	D2	H	A	B	T
LS533 SL533	110	70	Φ 10		51	35	17	4
	120	80						
	125	85						
	160	120						
	200	160						
LS533 SL533	250	210	8	12	44	34		
	110	70						
	120	80						
	125	85						
	160	120						
SL533	200	160						
	250	210						
	备注：8*12材料为椭圆形材料 8*12 materials are oval materials							
订货料号示范：LS533-L-D-H-G（其它规格可定制） Demonstration of ordering number：LS533-L-D-H-G（Other specifications can be customized）								

LS534系列

型号 Model	品名 Product Name	材质 Material	表面处理(G) Surface treatment
LS534	焊接铁拉手 Welded iron handle	铁 Steel	1=铬 2=镍 7=电泳 8=烤漆 1=Chrome 2=Nickel 7=Electrophoresis 8=Baking paint
SL534	焊接不锈钢拉手 Welded stainless steel handle	不锈钢 Stainless steel	4=镜光 44=普光 4=Mirror Polishing 44=General Polishing

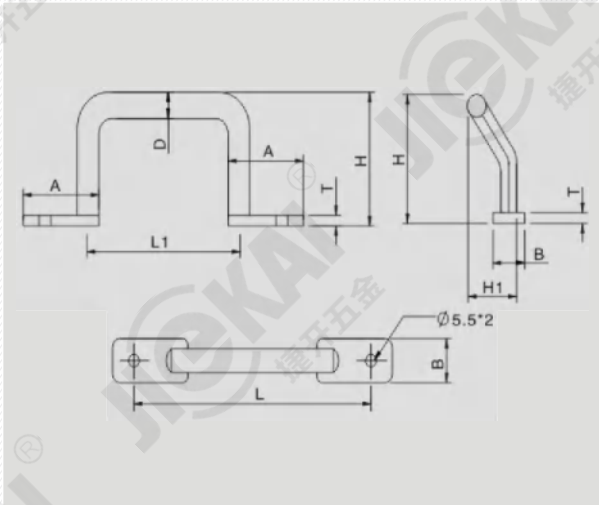


型号 Model	安装中心距 Installation center distance		原材料 Raw material	安装高度 Height	拉手宽度 Handle width	底座规格 Base specification		
代码 Code	L	L1	D	H	H1	A	B	T
LS534 SL534	110	70	Φ 10	51	40	35	17	4
	120	80						
	125	85						
	160	120						
	200	160						
	250	210						

订货料号示范:LS534-L-D-H-G (其它规格可定制) Demonstration of ordering number : LS534-L-D-H-G (Other specifications can be customized)

LS535系列

型号 Model	品名 Product Name	材质 Material	表面处理(G) Surface treatment
LS535AL	带安装板双弯拉手 Double-bent handle with mounting plate	铝 Aluminium	5=氧化 6=喷砂 5=Oxidation 6=Sandblasting

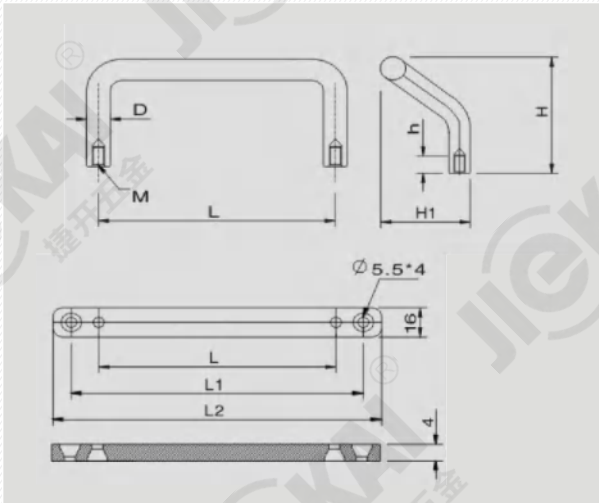


型号 Model	安装中心距 Installation center distance	原材料 Raw material	安装高度 Height	牙纹 Thread size	牙长 Thread length	拉手宽度 Handle width	安装孔距 Installation hole spacing	板总长 Total length of plate
代码 Code	L	D	H	M	h	H1	L1	L2
LS535AL	100	Φ 10	47	M5	13	40	127	145
	120						147	165
	125						152	170

订货料号示范:LS535AL-L-D-H-M-h-G (其它规格可定制) Demonstration of ordering number : LS535AL-L-D-H-M-h-G (Other specifications can be customized)

LS536系列

型号 Model	品名 Product Name	材质 Material	表面处理(G) Surface treatment
LS536	带安装圆形拉手 Round handle with mounting	铁 Steel	1=铬 2=镍 1=Chrome 2=Nickel
SL536		不锈钢 Stainless steel	4=镜光 44=普光 4=Mirror Polishing 44=General Polishing

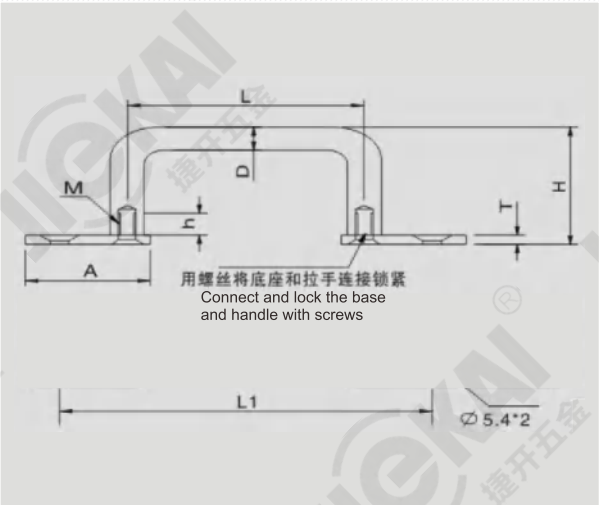


型号 Model	安装中心距 Installation center distance		原材料 Raw material	安装高度 Height	牙纹 Thread size	牙长 Thread length	底座规格 Base specification		
代码 Code	L	L1	D	H	M	h	A	B	T
LS536 SL536	80	104	Φ 10	42	M5	10	26	16	5.0
	100	124							
	110	134							
	120	144							
	125	149							
	160	184							
	200	224							
	250	274							

订货料号示范:LS536-L-D-H-M-h-G (其它规格可定制) Demonstration of ordering number : LS536-L-D-H-M-h-G (Other specifications can be customized)

LS537系列

型号 Model	品名 Product Name	材质 Material	表面处理(G) Surface treatment
LS537	双弯铁拉手 Double-bent steel handle	铁 Steel	1=铬 2=镍 7=电泳 1=Chrome 2=Nickel 7=Electrophoresis
SL537	双弯不锈钢拉手 Double-bent stainless steel handle	不锈钢 Stainless steel	4=镜光 44=普光 4=Mirror Polishing 44=General Polishing

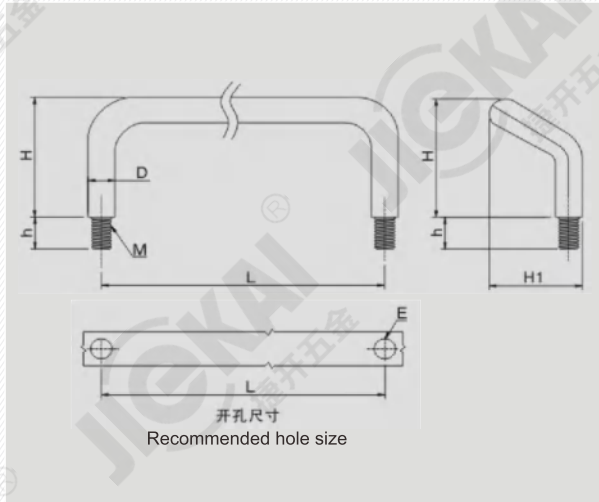


型号 Model	安装中心距 Installation center distance	原材料 Raw material	安装高度 Height	牙纹 Thread size	牙长 Thread length	拉手宽度 Handle width	开孔孔径 Hole diameter		
代码 Code	L	D	H	M	h	H1	E		
LS537 SL537	100	Φ 8.0	32	M6	12	18	Φ 7.0		
	120		40						
	88	Φ 10	47		15	40			
	100								
	120								
	125								

订货料号示范:LS537-L-D-H-M-h-G (其它规格可定制) Demonstration of ordering number : LS537-L-D-H-M-h-G (Other specifications can be customized)

LS538系列

型号 Model	品名 Product Name	材质 Material	表面处理(G) Surface treatment
LS538	毛巾拉手 Towel Handle	铁 Steel	1=铬 1=Chrome

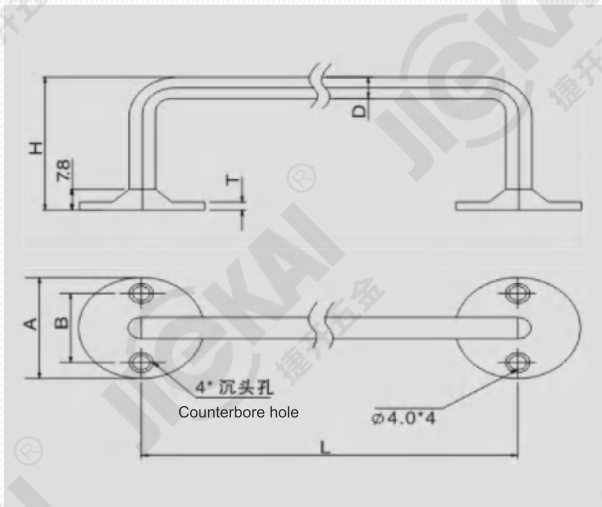


型号 Model	安装中心距 Installation center distance	原材料 Raw material	安装高度 Height	底座尺寸 Base size		
代码 Code	L	D	H	A	B	T
LS538	180	Φ 8.0	50	Φ 38	26	2.9
	230					
	305					
	406					
	530					
	680					

订货料号示范:LS538-L-D-H (其它规格可定制) Demonstration of ordering number :LS538-L-D-H (Other specifications can be customized)

LS539系列

型号 Model	品名 Product Name	材质 Material	表面处理(G) Surface treatment
LS539	折叠拉手 Folding handle	铁 Steel	1=铬 2=镍 7=电泳 1=Chrome 2=Nickel 7=Electrophoresis
SL539		不锈钢 Stainless steel	4=镜光 44=普光 4=Mirror Polishing 44=General Polishing

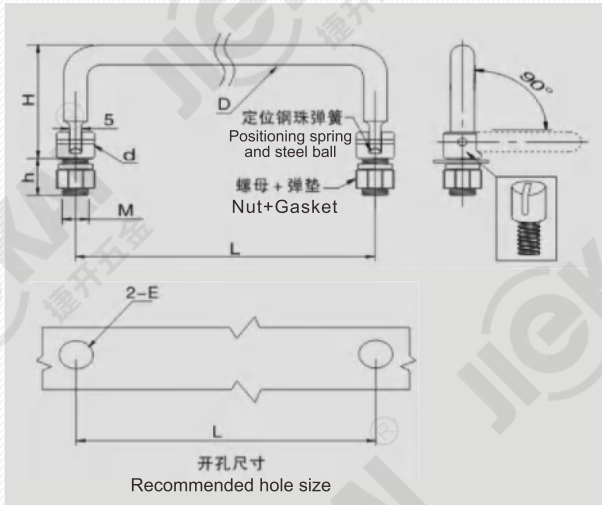


型号 Model	安装中心距 Installation center distance	原材料 Raw material	安装高度 Height	牙纹 Thread size	牙长 Thread length	套子外径 Outer diameter of the sleeve	开孔孔径 Hole diameter
代码	L	D	H	M	h	d	E
LS539	90	Φ 9.0	41.5	M10	16	Φ 16	Φ 11
	100						
SL539	120						
SL539	152.4	Φ 9.5	47	3/8-24			

订货料号示范:LS539-L-D-H-M-h-G (其它规格可定制) Demonstration of ordering number : LS539-L-D-H-M-h-G (Other specifications can be customized)

LS540系列

型号 Model	品名 Product Name	材质 Material	表面处理(G) Surface treatment
LS540	四方拉手 Square handle	铁 Steel	1=铬 2=镍 7=电泳 1=Chrome 2=Nickel 7=Electrophoresis
SL540		不锈钢 Stainless steel	4=镜光 44=普光 9=拉丝 4=Mirror Polishing 44=General Polishing 9=blushed

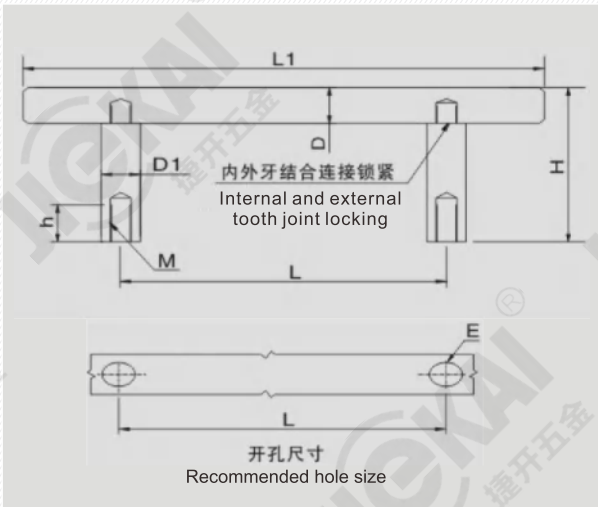


型号 Model	安装中心距 Installation center distance	原材料 Raw material	安装高度 Height	牙纹 Thread size	牙长 Thread length	总长度 Total length	宽度 Width	开孔孔径 Hole diameter
代码 Code	L	D	H	M	h	L1	D1	E
LS540 SL540	80	Φ 9.5	31	M4	8	134	Φ 7.5	Φ 5.0
	96					148		
	100					152		
	120					172		
	160					212		

订货料号示范:LS540-L-D-H-M-h-G (其它规格可定制) Demonstration of ordering number : LS540-L-D-H-M-h-G (Other specifications can be customized)

LS541J系列

型号 Model	材质 Material	表面处理(G) Surface treatment
LS541J	铁 Steel	2=镍 2=Nickel

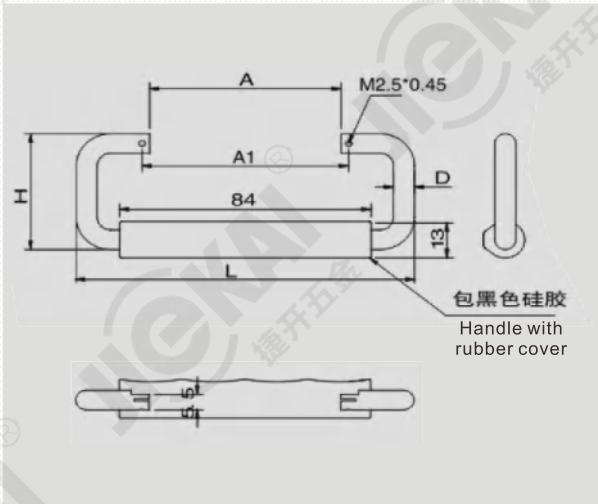


型号 Model	总长度 Total length	外径 External diameter	总宽度 Total width	开口长度 Opening length	牙距 Tooth pitch
代码 Code	L	D	H	A	A1
LS541J	113	Φ 7.0	41.4	64	69

订货料号示范:LS541J-L-D-H (其它规格可定制) Demonstration of ordering number : LS541J-L-D-H (Other specifications can be customized)

LS542系列

型号 Model	材质 Material	表面处理(G) Surface treatment
LS542	铁 Steel	1=铬 2=镍 1=Chrome 2=Nickel
SL542	不锈钢 Stainless steel	4=镜光 4=Mirror Polishing

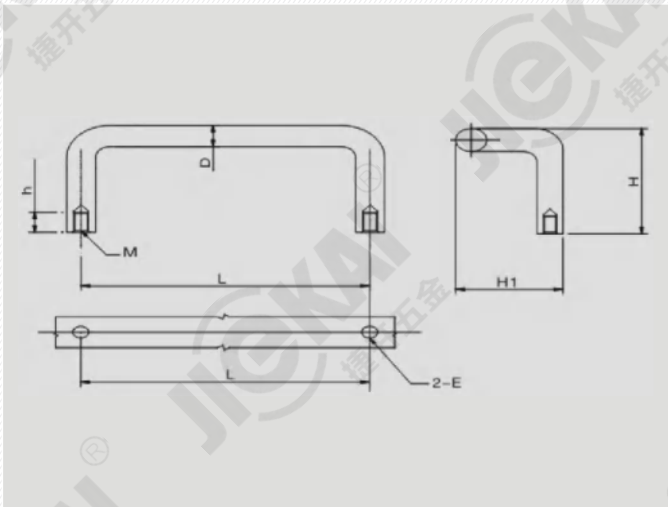


型号 Model	安装中心距 Installation center distance	原材料 Raw material	安装高度 Height	牙纹 Thread size	牙长 Thread length	宽度 Width	开孔孔径 Hole diameter
代码 Code	L	D	H	M	h	H1	E
LS542	180	Φ 20	110	M6	12	125	Φ 7.0
SL542	180		110	M8	15		Φ 9.0
	300		98	M8	15		

订货料号示范:LS542-L-D-H-M-h-G (其它规格可定制) Demonstration of ordering number :LS542-L-D-H-M-h-G (Other specifications can be customized)

LS543系列

型号 Model	材质 Material	表面处理(G) Surface treatment
LS543	铁 Steel	1=铬 2=镍 3=锌 1=Chrome 2=Nickel 3=Zinc
SL543	不锈钢 Stainless steel	4=镜光 44=麻光 4=Mirror Polishing 44=General Polishing

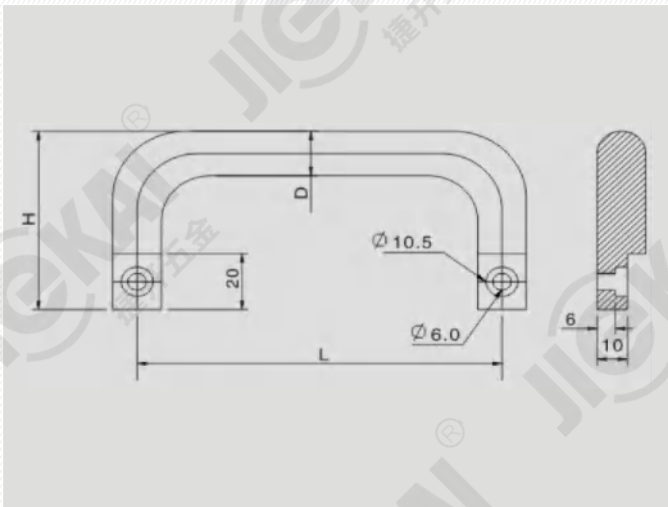


型号 Model	总长度 Total length	外径 External diameter	总宽度 Total width
代码 Code	L	D	H
LS543	100	Φ 16.0	64
SL543	120		
	138		

订货料号示范:LS543-L-D-H (其它规格可定制) Demonstration of ordering number :LS543-L-D-H (Other specifications can be customized)

LS546系列

型号 Model	品名 Product Name	材质 Material	表面处理(G) Surface treatment	备注 Note
LS546	限位折叠拉手 Limit folding handle	铁 Steel	1=铬 2=镍 1=Chrome 2=Nickel	有弹簧钢珠限位 With spring steel ball limit
SL546		不锈钢 Stainless steel	4=镜光 44=普光 4=Mirror Polishing 44=General Polishing	
LS546-2	无限位折叠拉手 Without limit folding handle	铁 Steel	1=铬 2=镍 1=Chrome 2=Nickel	无弹簧钢珠限位 Without spring steel ball limit
SL546-2		不锈钢 Stainless steel	4=镜光 44=普光 4=Mirror Polishing 44=General Polishing	

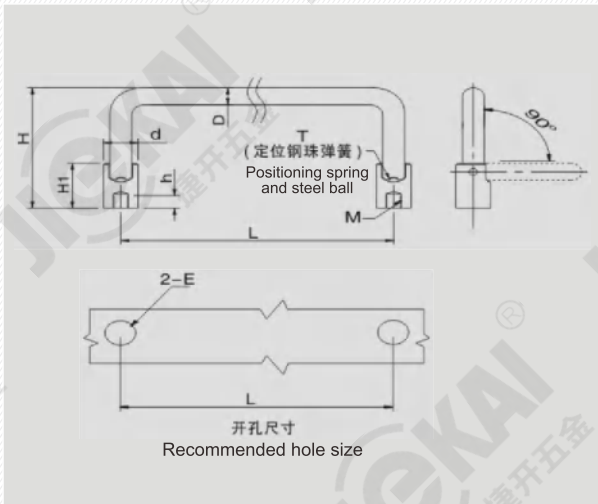


型号 Model	安装中心距 Installation center distance	原材料 Raw material	安装高度 Height	牙纹 Thread size	牙长 Thread length	套子规格 Sleeve specification		配备 Equipment	开孔孔径 Hole diameter
代码 Code	L	D	H	M	h	d	H1	T	E
LS546	90	Φ 8.5	60	M6	6	Φ 16	25	有限位 Limit	Φ 7.0
SL546	100								
	120								
LS546-2	90	Φ 8.5	60	M6	9	Φ 16	18	无限位 Without limit	
SL546-2	100								
	120								

订货料号示范:LS546-L-D-H-M-h-G (其它规格可定制) Demonstration of ordering number :LS546-L-D-H-M-h-G (Other specifications can be customized)

LS556系列


型号 Model	品名 Product Name	材质 Material	表面处理(G) Surface treatment
LS556	折叠拉手 Folding handle	铁 Steel	1=铬 2=镍 1=Chrome 2=Nickel
SL556		不锈钢 Stainless steel	4=镜光 44=普光 4=Mirror Polishing 44=General Polishing

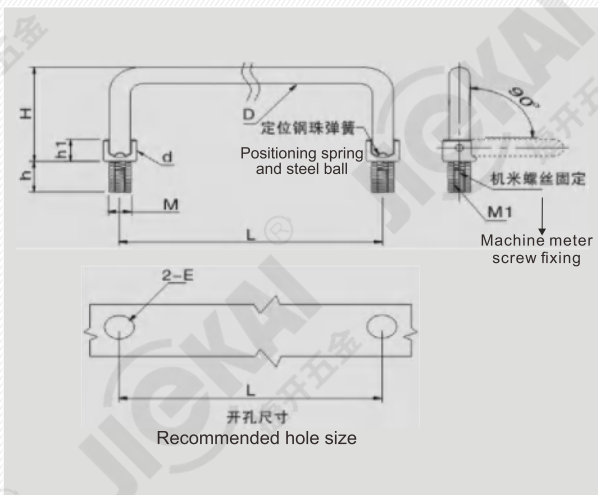

型号 Model	安装中心距 Installation center distance	原材料 Raw material	安装高度 Height	套子规格 Sleeve specification					开孔孔径 Hole diameter
代码 Code	L	D	H	M	h	d	h1	M1	E
LS556 SL556	54	Φ 6	30	M6	12	Φ 10	8	M3	Φ 7.0
	90		26	M5	7				Φ 6.0
	90	Φ 8.0	32	M6	9				Φ 14
	100		Φ 10.0	44	M10	15	Φ 17	14	M5
	100								
120									

LS566系列

型号 Model	品名 Product Name	材质 Material	表面处理(G) Surface treatment
LS566	包胶折叠拉手 Folding handle series with rubber cover	铁 Steel	1=铬 2=镍 7=电泳 1=Chrome 2=Nickel 7=Electrophoresis
SL566		不锈钢 Stainless steel	4=镜光 44=普光 4=Mirror Polishing 44=General Polishing

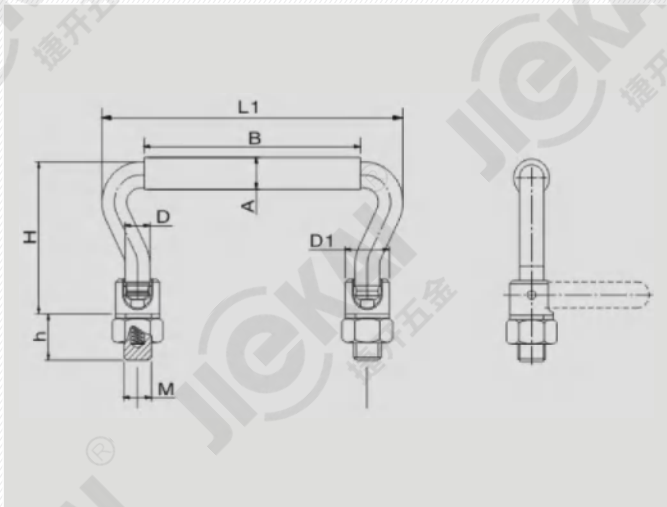


型号 Model	安装中心距 Installation center distance	原材料 Raw material	安装高度 Height	牙纹 Thread size	牙长 Thread length	套子外径 Outer diameter of the sleeve	拉手总宽 Total width of handle	包胶直径 Diameter of rubber sleeve	包胶长度 Length of rubber sleeve
代码 Code	L	D	H	M	h	D1	L1	A	B
LS566	84	Φ 9.0	56.5	M10	16	Φ 16	110	Φ 13	80
SL566	90						116		

订货料号示范:LS556-L-D-H-M-h-G (其它规格可定制) Demonstration of ordering number :LS556-L-D-H-M-h-G (Other specifications can be customized)

LS576系列


型号 Model	品名 Product Name	材质 Material	表面处理(G) Surface treatment
LS576	双折叠包胶拉手 Double wrapped rubber cover folding handle	铁 Steel	1=铬 2=镍 1=Chrome 2=Nickel
SL576		不锈钢 Stainless steel	4=镜光 44=普光 4=Mirror Polishing 44=General Polishing

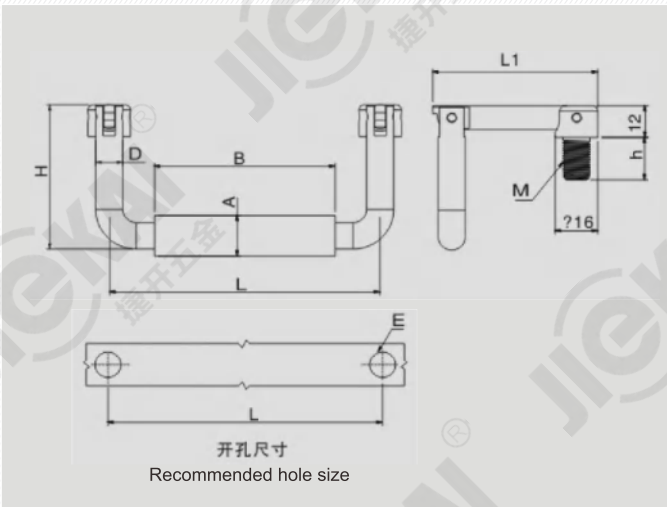


型号 Model	安装中心距 Installation center distance	原材料 Raw material	安装高度 Height	牙纹 Thread size	牙长 Thread length	宽度 Width	包胶规格 Coating specification	开孔孔径 Hole diameter
代码 Code	L	D	H	M	h	L1	A	B
LS576	120	Φ 8.8	68.5	M10	21.5	37	Φ 18	90
SL576	120		42		16	42		

订货料号示范:LS576-L-D-H-M-h-G (其它规格可定制) Demonstration of ordering number :LS576-L-D-H-M-h-G (Other specifications can be customized)

LS601系列

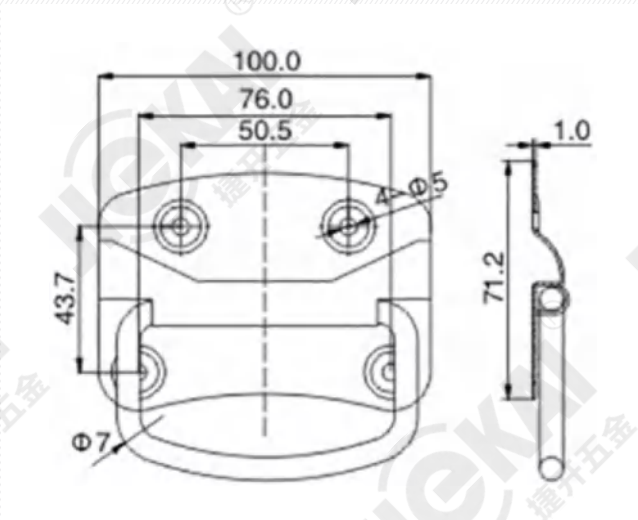


LS602系列

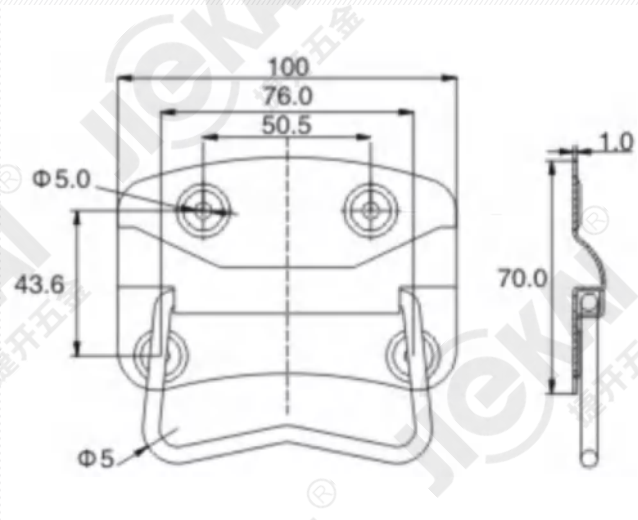


产品料号规格表 Product material number specification table

型号 Model	规格 Specifications	材质 Material	表面处理(G) Surface treatment
LS601	LS601-1	铁 Steel	镍 Nickel
	SL601-2	SUS201	振光 Vibrating polishing
	SL601-3	SUS304	振光 Vibration light
LS602	LS602-1	铁 Steel	镍 Nickel
	SL602-2	SUS201	振光 Vibrating polishing
	SL602-3	SUS304	振光 Vibrating polishing

LS608系列


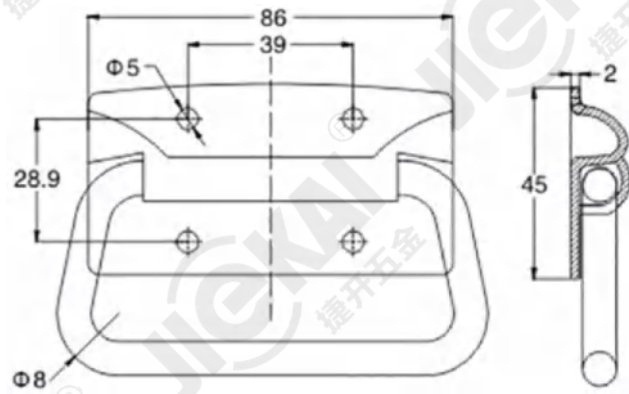


LS609系列

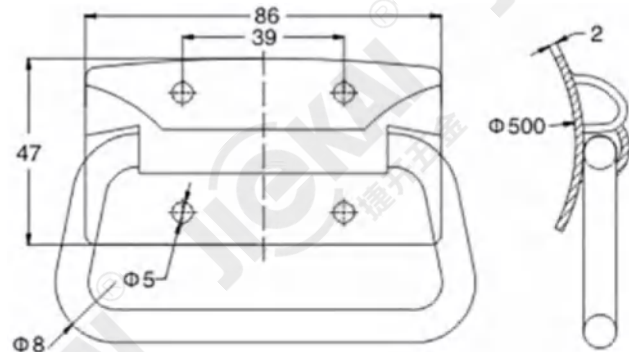


产品料号规格表 Product material number specification table			
型号 Model	规格 Specifications	材质 Material	表面处理(G) Surface treatment
LS608	LS608-1	铁 Steel	镍 Nickel
	SL608-2	SUS201	振光 Vibrating polishing
	SL608-3	SUS304	振光 Vibrating polishing
LS609	LS609-1	铁 Steel	镍 Nickel
	SL609-2	SUS201	振光 Vibrating polishing
	SL609-3	SUS304	振光 Vibrating polishing

LS620系列

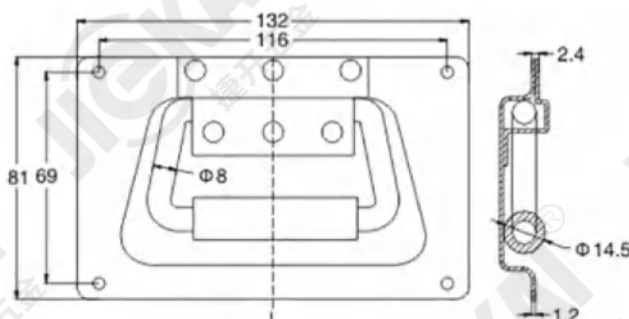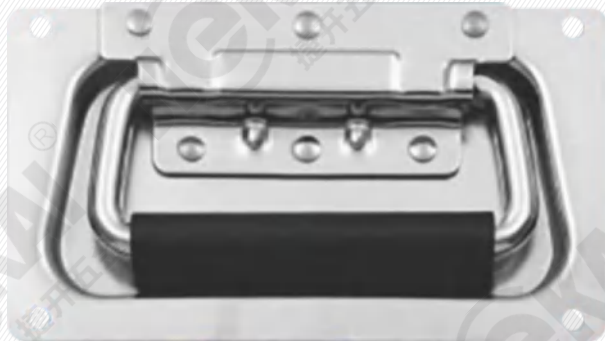


LS630系列

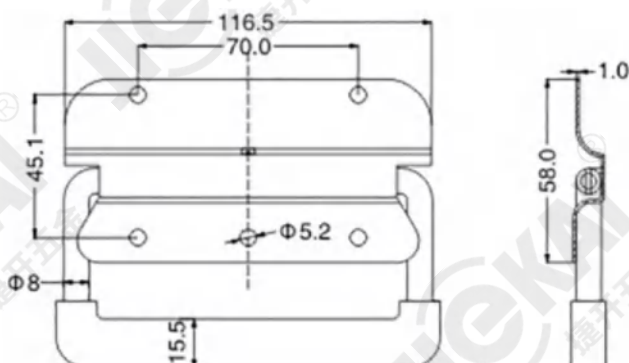


产品料号规格表 Product material number specification table			
型号 Model	规格 Specifications	材质 Material	表面处理(G) Surface treatment
LS620	LS620-1	铁+塑料 Steel+Plastic	铬 Chrome
	LS620-2		黑色 Black
	LS620-3		蓝锌 Blue zinc
LS630	LS630-1		铬 Chrome
	LS630-2		黑色 Black
	LS630-3		蓝锌 Blue zinc

LS631系列

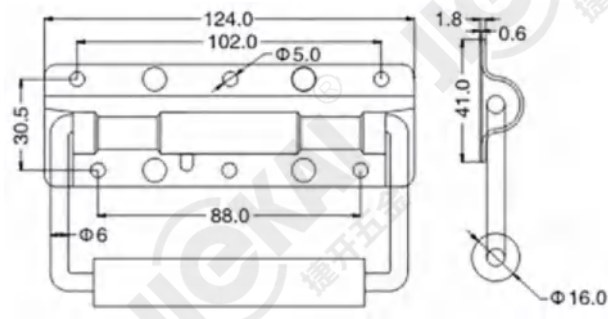

LS632系列

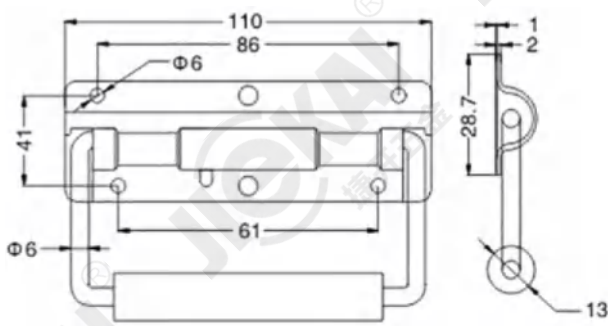

产品料号规格表 Product material number specification table

型号 Model	规格 Specifications	材质 Material	表面处理(G) Surface treatment
LS631	LS631-1	铁+塑料+锌合金 Steel+Plastic+Zinc Alloy	铬 Chrome
	LS631-2		黑色 Black
	LS631-3		蓝锌 Blue zinc
LS632	LS632-1	铁+塑料 Steel+Plastic	铬 Chrome
	LS632-2		黑色 Black
	LS632-3		蓝锌 Blue zinc



板型
Plate type



嵌入式
Embedded type



嵌入式
Embedded type



嵌入式
Embedded type



柔软型
Soft type



嵌入式
Embedded type



线型、定制型
Line type、Customized type



线型、定制型
Line type、Customized type



线型、定制型
Line type、Customized type

除目录书规格外我们还可以为您定制, 欢迎来电咨询!
In addition to the catalogue, we can also customize it for you. Welcome to inquire