


RECOMMENDED P.C.B. PATTERN LAYOUT

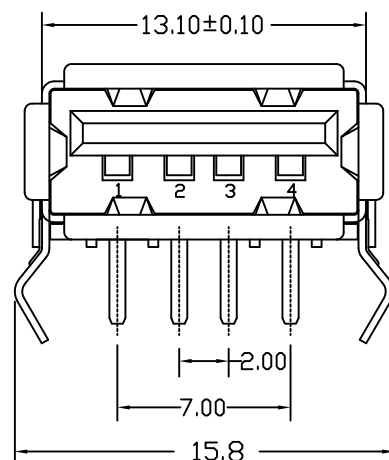

Specifications

Current Rating: 1.5A AC/DC

Voltage Rating: 30V AC/DC

Contact Resistance: 30m ohm. Max.

Insulation Resistance: 1000M ohm. min.

Withstanding Voltage: 500V AC For One Minute

Operating Temperature Range: -55°C ~ +105°C



Material And Finish

Insulator: PBT+30%GF UL94V-0

Contact: Brass or Copper Alloy

Plating: Gold Plated on Contact Area, Tin Plated on Solder Tail.

Shell: Brass or Copper Alloy, Nickel Plated

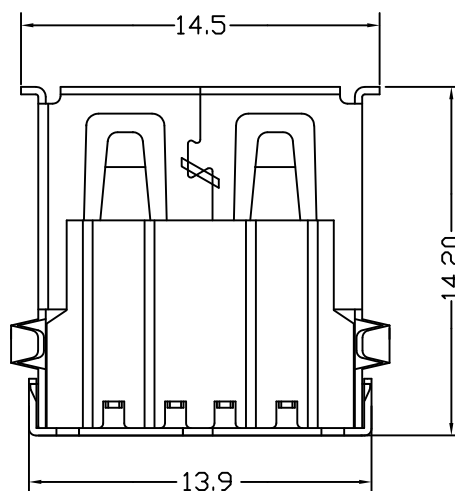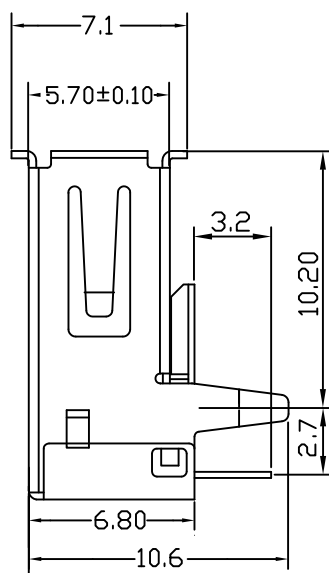

AAACONN

AAA (HK) Electronics Co., Ltd.

www.aaaconnectors.com

RoHS Compliant

TOLERANCES ARE

DRAWING BY	X. ± 0.45
CHECKED BY	.X ± 0.30
UNIT / mm	.XX ± 0.20
DATE	.XXX ±
SIZE A4	ANG ±
PPOJECTION	



ORDER INFORMATION

USB-A-H-4-x-x

SERIES

INSULATOR COLOR: 1=BLACK, 2=WHITE, 3=BLUE, 4=BEIGE

SHELL & CONTACT: 1=BRASS, 2=COPPER ALLOY

4 POSITION

HORIZONTAL 90°

Description: USB-A (USB TYPE-A) Receptacle Connector 4 Position Through Hole, Right Angle