



炎兴自动化

# xScene Motion

(CHENGDU YANXING AUTOMATION TECHNOLOGY CO., LTD)

© Theater / Show / Mobile performance / Control system Expert


## KiloTalk Suspension Load Monitoring System

Consists of KiloCell sensor, KiloHub master control, KiloView monitoring software, and KiloAP wireless router



Winter Olympics ground stage machinery control system supplier

# Weighing system diagram >>>

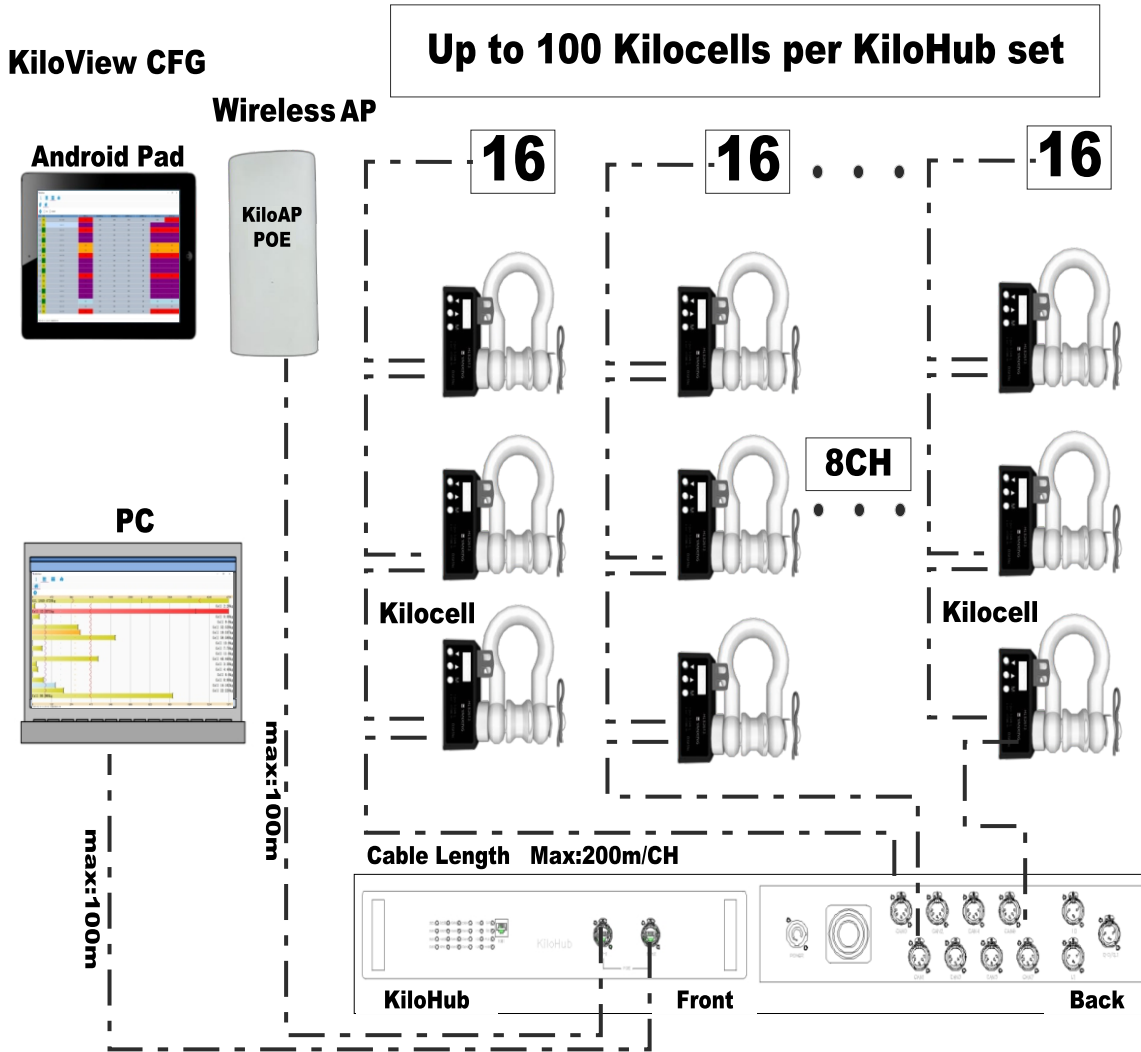

- Can be used independently or embedded in Goatshow control system
- Single KiloHub supports up to 100 nodes
- Supports up to 16 nodes per channel, up to 200M (dedicated communication cable)
- Support for up to 8 KiloHub cascades
- KiloView monitoring software, supports PC and Android clients
- KiloView provides a variety of monitoring interfaces to suit different scenarios
- Complete protection and output alarm mechanisms for all types

## KiloCell series sensors >>>



- ◆ Standard shackle, high space utilization
- ◆ High safety, 10:1 and 5:1 products available
- ◆ Measuring range 0.5T~5T, the whole system 150%F.S overload capacity
- ◆ Adopts the combined power supply and communication cable, XLR-5 core connection, supporting single point and Daisy chain connection
- ◆ CANOPEN communication mode, users only need to set the address, the network is fast
- ◆ 3-key local menu, digital tube display (can be turned off)

## KiloHub control >>>



- ◆ A single master can manage 100 KiloCell scales
- ◆ Supports 8 kiloHub cascades to easily build large monitoring systems
- ◆ 8-channel CANHUB patented design, flexible and simple
- ◆ Each channel supports a maximum of 16 devices, single-cable Daisy chain connection
- ◆ Two standard POE ports
- ◆ Standard 2U rack with 230VAC power supply
- ◆ Local LED status indication
- ◆ Provides four DI and two DQ outputs



Leading technology, social services, service to create customer value



Public account



<http://www.yanxingtech.com>

0086-28-81135561

Unit 1, Building 6, 1166 Tianlong Avenue, Jinniu High-tech Industrial Park, Chengdu, Sichuan, China