| AMELIN | PRODUCT GROUP | REV | ISSUE DATE |
|--------|---------------|---------|------------|
| | Customer SPEC | Rev. PO | May.26,20' |

TITLE :AML215HJJ-P02 Product Specification Rev. P0

| Custome | Recipient's | Recipient's recognition | |
|-------------|---------------|-------------------------|--|
| Take charge | Establishment | YiXian He | |
| Audit | Audit | | |
| Approved | Approved | | |

| AMELIN | PRODUCT GROUP | REV | ISSUE DATE |
|--------|---------------|---------|------------|
| | Customer SPEC | Rev. PO | May.26,20' |

Contents

| No. | Item | Page |
|-----|-------------------------------|-------|
| 1.0 | GENERAL DESCRIPTION | 4 |
| 2.0 | ABSOLUTE MAXIMUM RATINGS | 6~7 |
| 3.0 | Electrical Specifications | 7~9 |
| 4.0 | Input Terminal Pin Assignment | 9~13 |
| 5.0 | Backlight Unit | 13 |
| 6.0 | Appendix | 14~17 |
| 7.0 | Packing | 18 |
| 8.0 | General Precautions | 18~19 |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |

| AMELIN | PRODUCT GROUP | REV | ISSUE DATE |
|--------|---------------|---------|------------|
| | Customer SPEC | Rev. PO | May.26,20' |

REVISION HISTORY

| 1 | \nreliminary | specification |
|---|--------------|---------------|
| ۱ | , premimary | specification |

()Final specification

| Revision No. | Page | Description of changes | Date | Prepared |
|--------------|------|------------------------|------------|-----------|
| Rev.0 | | Initial Release | May.26,20' | YiXian He |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |

| Α | M | El | LI | N |
|---|---|----|----|---|


| PRODUCT GROUP | REV | ISSUE DATE |
|---------------|---------|------------|
| Customer SPEC | Rev. P0 | May.26,20' |

1.0 GENERAL DESCRIPTION

1.1 Introduction

AML215HJJ-P02 is a diagonal 21.5" color active matrix LCD open cell with 1ch-LVDS interface. This open cell is a transmissive type display operating in the normally black mode. It supports 1920 * 1080 FHD resolution and can display up to

16.7M colors (8bit). Each pixel is divided into Red, Green and Blue sub-pixels which are arranged in vertical stripe. This open cell dedicates for LCD TV & Monitor products and provides excellent performance which includes high brightness, ultra wide viewing angle, high color saturation and high color depth. CSOT open cell comply with RoHS for identification.

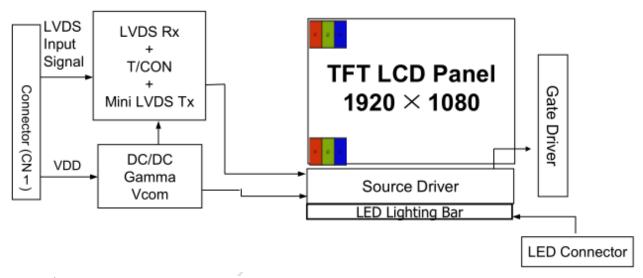

- 2. General Description
- 2.1 Product Features
- FHD Resolution (1920 * 1080)
- Very High Contrast Ratio: 3000:1
- Fast Response Time
- Ultra Wide Viewing Angle: 178°(H)/178°(V) (CR10)
- DE (Data Enable) Mode
- LVDS (Low Voltage Differential Signaling) Interface

The content contained in this document is copyrighted by the company and the use, disclosure, distribution, reproduction or other similar misconduct of the contents of this document without consent or authorization is strictly prohibited. Unless authorized by the company in writing or in the contract 4 / 19

| AMELIN | PRODUCT GROUP | REV | ISSUE DATE |
|--------|---------------|---------|------------|
| | Customer SPEC | Rev. P0 | May.26,20' |

1.3 Application

- Desktop Type of PC & Workstation Use
- Slim-Size Display for Stand-alone Monitor
- Display Terminals for Control System
- Monitors for Process Controlle

1.4 General Information

| Parameter | Specification | Unit | Remarks |
|---------------------|------------------------------------|--------|---------|
| Active area | 476.64 (H) * 268.11 (V) | MM | |
| Number of pixels | 1920(H) ×1080(V) | pixels | |
| Pixel pitch | 0.24795(H) x 0.24795(V) | MM | |
| Pixel arrangement | RGB Vertical stripe | | |
| BLU Brightncs | 250 | Cd/m² | |
| Display colors | 16.7M | colors | |
| Display mode | Transmissive Mode, Normally Black | | |
| Dimensional outline | 495.6(H) × 292.4(V) × 10.5(D) typ. | | |
| Weight | | | |
| Surface Treatment | SR16, 3H hard coating, Haze : 25 | | |
| Back-light | 1-LED Lighting Bar type | | |

The content contained in this document is copyrighted by the company and the use, disclosure, distribution, reproduction or other similar misconduct of the contents of this document without consent or authorization is strictly prohibited. Unless authorized by the company in writing or in the contract 5 / 19

| AMELIN | PRODUCT GROUP | REV | ISSUE DATE |
|--------|---------------|---------|------------|
| | Customer SPEC | Rev. PO | May.26,20' |

2.0 ABSOLUTE MAXIMUM RATINGS

The followings are maximum values which, if exceed, may cause faulty operation or damage to the unit. The operational and non-operational maximum voltage and current values are listed in Table 2


< Table 2. Absolute Maximum Ratings>

| Parameter | Symbol | Min. | Max. | Unit | Remarks |
|-----------------------|--------|---------|-----------|------------|-----------|
| Power Supply Voltage | V DD | -0.3 | 5.5 | V | Ta = 25 ℃ |
| Logic Supply Voltage | VIN | VSS-0.3 | V DD +0.3 | V | 1a = 25 C |
| Operating Temperature | Т ОР | 0 | 50 | $^{\circ}$ | 1) |
| Storage Temperature | T ST | -20 | 60 | $^{\circ}$ | 1) |

Note: 1) Temperature and relative humidity range are shown in the figure below.

Wet bulb temperature should be 39 O C max. and no condensation of water.

| AMELIN | PRODUCT GROUP | REV | ISSUE DATE |
|--------|---------------|---------|------------|
| | Customer SPEC | Rev. P0 | May.26,20' |

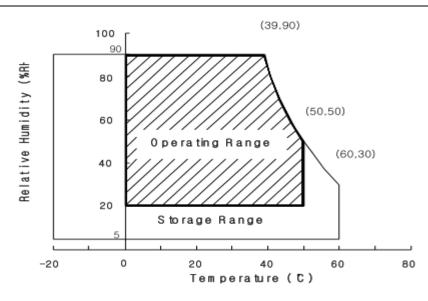

3. Electrical Specifications

3.1 Open Cell Power Consumption (TA = 25 ± 2 °C)

| Parameter | | Cumbal | Value | | | Lloit | Note |
|--------------|-------------------|--------|-------|------|------|-------|------|
| | | Symbol | Min. | Тур. | Max. | Unit | Note |
| Power S | upply Voltage | V CC | 4.5 | 5.0 | 5.5 | V | (1) |
| Rus | h Current | I RUSH | - | - | 1.91 | Α | (2) |
| Power Supply | White Pattern | I cc | - | 0.96 | 1.25 | А | |
| Current | Horizontal Stripe | I cc | - | 1.27 | 1.66 | Α | (3) |
| | Black Pattern | I cc | - | 0.75 | 0.98 | Α | |

Note:

- (1) The ripple voltage should be controlled less than 10% of V CC.
- (2) Measurement condition: V CC = 5V, Rising time = 470μ s.

The content contained in this document is copyrighted by the company and the use, disclosure, distribution, reproduction or other similar misconduct of the contents of this document without consent or authorization is strictly prohibited. Unless authorized by the company in writing or in the contract

| AMELIN | PRODUCT GROUP | REV | ISSUE DATE |
|--------|---------------|---------|------------|
| | Customer SPEC | Rev. P0 | May.26,20' |


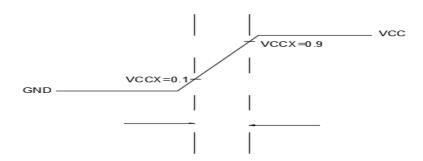


Fig. 3.1 V CC rising time condition

(3) Measurement condition: V CC = 5V, Ta = $25 \pm 2^{\circ}$ C, F = 75 Hz. The test patterns are shown as below.

A. White Pattern



C. Black Pattern



Fig. 3.2 Test patterns

The content contained in this document is copyrighted by the company and the use, disclosure, distribution, reproduction or other similar misconduct of the contents of this document without consent or authorization is strictly prohibited. Unless authorized by the company in writing or in the contract 8 / 19

| AMELIN | PRODUCT GROUP | REV | ISSUE DATE |
|--------|---------------|---------|------------|
| | Customer SPEC | Rev. PO | May.26,20' |

3.2 LVDS Characteristics

| | Parameter | | Value | | | l Init | Note |
|-------------------|---|--------|-------|------|-------|--------|------|
| Parameter | | Symbol | Min. | Тур. | Max. | Unit | Note |
| | Differential Input High | V TH | +100 | | | MV | |
| | Threshold Voltage | VIII | +100 | _ | _ | IVIV | |
| IVDC | Differential Input Low Threshold Voltage | V TL | - | - | -100 | MV | |
| LVDS Interface | Common Input Voltage | V CM | 1.0 | 1.2 | 1.4 | V | |
| | Differential Input Voltage | V ID | 100 | - | 600 | MV | |
| | Terminating Resistor | RT | 87.5 | 100 | 112.5 | ohm | |
| CMOS | Input High Threshold Voltage | VIH | 2.7 | ı | 3.3 | V | |
| Interface | Input Low Threshold Voltage | VIL | 0 | - | 0.7 | V | |

4. Input Terminal Pin Assignment

4.1 Interface Pin Assignment

CN1: 300B30-0000RA-M4 (Starconn) or equivalent (see Note (1))

| PIN NO | Symbol | Description | Note |
|--------|--------|------------------|------|
| 1 | RO(0)N | Odd LVDS Signal- | |
| 2 | RO(0)P | Odd LVDS Signal+ | |
| 3 | RO(1)N | Odd LVDS Signal- | |
| 4 | RO(1)P | Odd LVDS Signal+ | |
| 5 | RO(2)N | Odd LVDS Signal- | |

The content contained in this document is copyrighted by the company and the use, disclosure, distribution, reproduction or other similar misconduct of the contents of this document without consent or authorization is strictly prohibited. Unless authorized by the company in writing or in the contract 9 / 19

| AMELIN | PRODUCT GROUP | REV | ISSUE DATE |
|--------|---------------|---------|------------|
| | Customer SPEC | Rev. P0 | May.26,20' |

| | | <u> </u> | |
|----|--------|-------------------|--|
| 6 | RO(2)P | Odd LVDS Signal+ | |
| 7 | GND | Ground | |
| 8 | ROCLK- | Odd LVDS Clock- | |
| 9 | ROCLK+ | Odd LVDS Clock + | |
| 10 | RO(3)N | Odd LVDS Signal- | |
| 11 | RO(3)P | Odd LVDS Signal+ | |
| 12 | RE(0)N | Even LVDS Signal- | |
| 13 | RE(0)P | Even LVDS Signal+ | |
| 14 | GND | Ground | |
| 15 | RE(1)N | Even LVDS Signal- | |
| 16 | RE(1)P | Even LVDS Signal+ | |
| 17 | GND | Ground | |
| 18 | RE(2)N | Even LVDS Signal- | |
| 19 | RE(2)P | Even LVDS Signal+ | |
| 20 | RECLK- | Even LVDS Clock- | |
| 21 | RECLK+ | Even LVDS Clock + | |
| 22 | RE(3)N | Even LVDS Clock- | |
| 23 | RE(3)P | Even LVDS Clock + | |
| | | | |

The content contained in this document is copyrighted by the company and the use, disclosure, distribution, reproduction or other similar misconduct of the contents of this document without consent or authorization is strictly prohibited. Unless authorized by the company in writing or in the contract 10/19

| AMELIN | PRODUCT GROUP | REV | ISSUE DATE |
|--------|---------------|---------|------------|
| | Customer SPEC | Rev. P0 | May.26,20' |

| 24 | GND | Ground | |
|----|-----|--|--|
| 25 | WP | Write Protect (High: Write Enable, Low or Open: Write Disable) | |
| 26 | SCL | I2C Serial Clock (for adjust VCOM) | |
| 27 | SDA | I2C Serial Clock (for adjust VCOM) | |
| 28 | 5V | DC power supply | |
| 29 | 5V | DC power supply | |
| 30 | 5V | DC power supply | |

Note:

(1) The direction of pin assignment is shown as below:

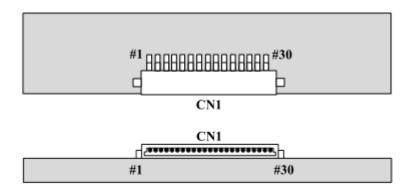


Fig. 4.1 LVDS connector direction sketch map

(2) a. Please let it open (Do not line out from PCBA connector) if it do not used.(for example: TV set)

The content contained in this document is copyrighted by the company and the use, disclosure, distribution, reproduction or other similar misconduct of the contents of this document without consent or authorization is strictly prohibited. Unless authorized by the company in writing or in the contract 11 / 19

| AMELIN | PRODUCT GROUP | REV | ISSUE DATE |
|--------|---------------|---------|------------|
| | Customer SPEC | Rev. PO | May.26,20' |


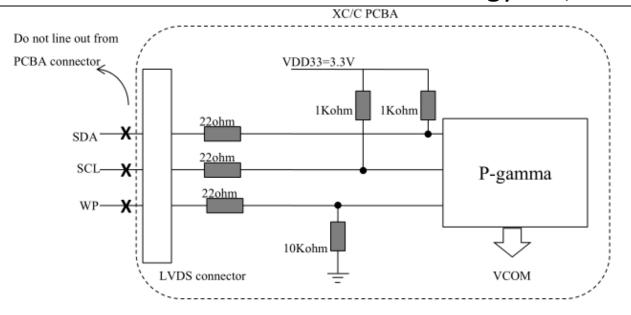


Fig. 4.2 WP/SDA/SCL PCBA set

b. For the VCOM (Flicker) regulation and control, SDA and SCL must pull high in the flicker set, and the flicker

set's VDD must ready before the input power (VCC5V)

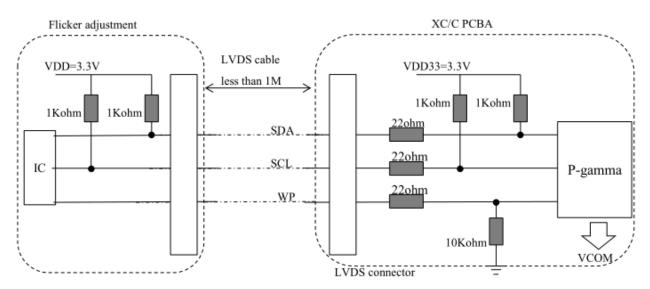

The content contained in this document is copyrighted by the company and the use, disclosure, distribution, reproduction or other similar misconduct of the contents of this document without consent or authorization is strictly prohibited. Unless authorized by the company in writing or in the contract 12/19

| AMELIN | PRODUCT GROUP | REV | ISSUE DATE |
|--------|---------------|---------|------------|
| | Customer SPEC | Rev. P0 | May.26,20' |

Fig. 4.3 WP/SDA/SCL flicker set

4.2Block Diagram of Interface




Fig. 4.4 Block diagram of interface

5.1 Backlight Unit

| Parameter | | Min. | Тур. | Max. | Unit | Remarks |
|--|------|-------|-------|-------|------|--------------|
| LED Light Bar Input Voltage Per Input Pin | VPIN | - | 52.8 | 58 | V | Duty 100% |
| LED Light Bar Input Current Per Input Pin | IPIN | 60 | 60 | 60 | MA | Note1,2, |
| LED Power Consumption | P BL | - | 12.67 | 13.92 | W | Note 3 |
| LED Life-Time | - | 30000 | | | Hrs | Note 4 |

LED bar consists of 72LED packages,4 strings(parallel)*18packages(serial)

Note1: There are One light bar ,and the specified current is input LED chip 100% duty current

Note2: The sense current of each input pin is 60mA

Note3: P BL =4 Input pins*VPIN ×IPIN

Note4: The lifetime is determined as the time at which luminance of LED become 50% of the initial brightness or not normal lighting at IPIN=60mA on condition of continuous operating at

25 ±**2** ℃

The content contained in this document is copyrighted by the company and the use, disclosure, distribution, reproduction or other similar misconduct of the contents of this document without consent or authorization is strictly prohibited. Unless authorized by the company in writing or in the contract 13 / 19

| AMELIN | PRODUCT GROUP | REV | ISSUE DATE |
|--------|---------------|---------|------------|
| | Customer SPEC | Rev. PO | May.26,20' |

6. 0 APPENDIX

Figure 1. Measurement Set Up


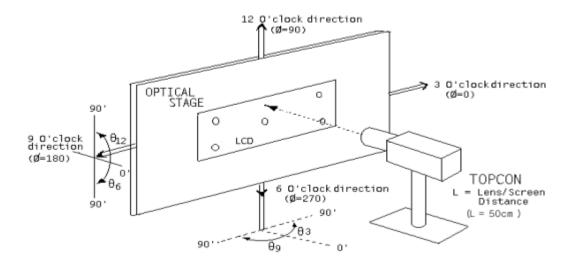


Figure 2. White Luminance and Uniformity Measurement Locations (9 points)

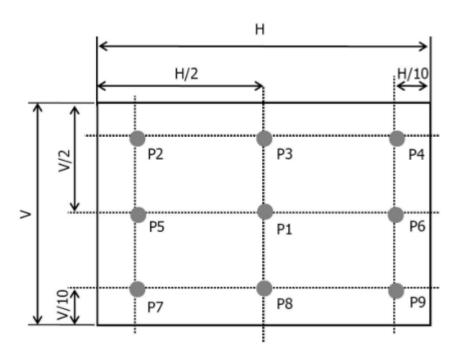

The content contained in this document is copyrighted by the company and the use, disclosure, distribution, reproduction or other similar misconduct of the contents of this document without consent or authorization is strictly prohibited. Unless authorized by the company in writing or in the contract 14/19

| AMELIN | PRODUCT GROUP | REV | ISSUE DATE |
|--------|---------------|---------|------------|
| | Customer SPEC | Rev. P0 | May.26,20' |

Figure 3. Response Time Testing


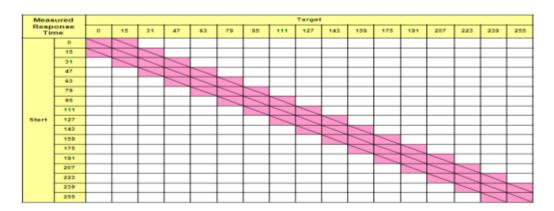


Figure 4. Cross Modulation Test Description

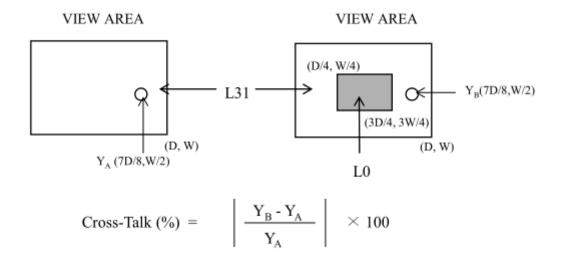

Where: Y A = Initial luminance of measured area (cd/m 2)


Y B = Subsequent luminance of measured area (cd/m 2)

The location measured will be exactly the same in both patterns

The content contained in this document is copyrighted by the company and the use, disclosure, distribution, reproduction or other similar misconduct of the contents of this document without consent or authorization is strictly prohibited. Unless authorized by the company in writing or in the contract 15 / 19


| AMELIN | PRODUCT GROUP | REV | ISSUE DATE |
|--------|---------------|---------|------------|
| | Customer SPEC | Rev. P0 | May.26,20' |

Figure 5. TFT-LCD Module Outline Dimensions (Front view)

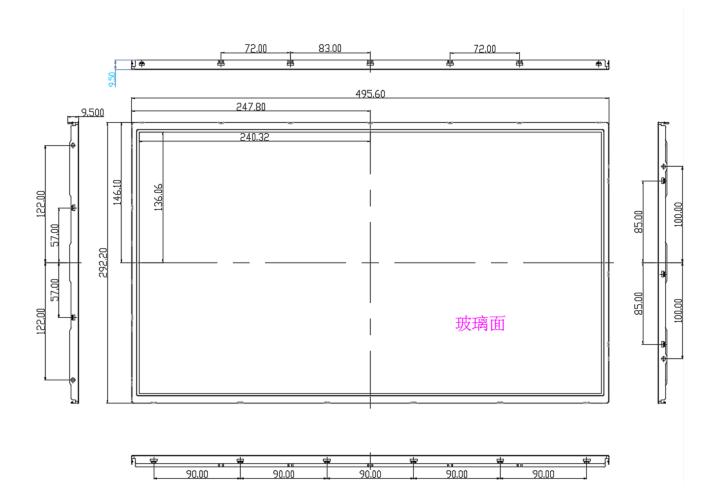

| AMELIN | PRODUCT GROUP | REV | ISSUE DATE |
|--------|---------------|---------|------------|
| | Customer SPEC | Rev. PO | May.26,20' |

Figure 6. TFT-LCD Module Outline Dimensions (Rear view)

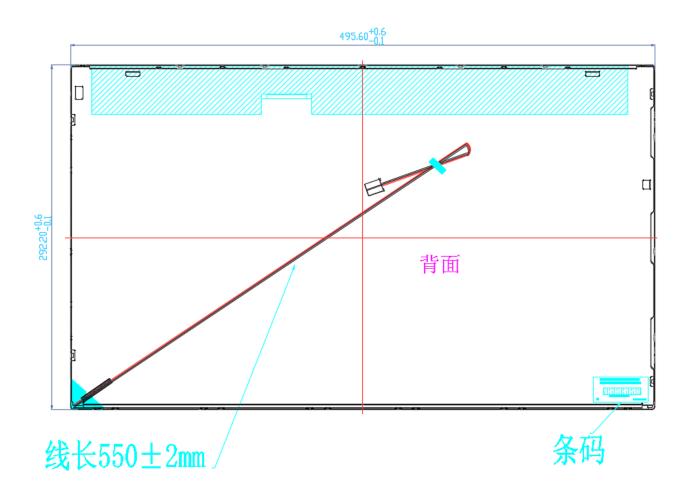


The content contained in this document is copyrighted by the company and the use, disclosure, distribution, reproduction or other similar misconduct of the contents of this document without consent or authorization is strictly prohibited. Unless authorized by the company in writing or in the contract 17/19

| AMELIN | PRODUCT GROUP | REV | ISSUE DATE |
|--------|---------------|---------|------------|
| | Customer SPEC | Rev. P0 | May.26,20' |

7.0 Packing

7.1 Packing Order

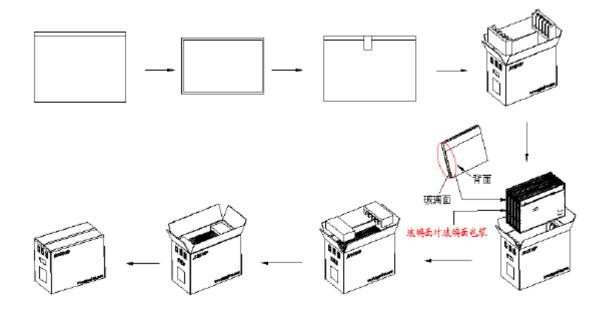

8.General Precautions

8.1Storage

- 1. Stor the module ina dark room where must keep at 25 ± 10 °C, 65 ± 10 %RH, the module shall be exposed under strong light such as direct sunlight.
- 2. Do not store the produce in surroundings containing organic solvent or corrosive gas
 - 3. Store the module in an anti-electrostatic container or film .
 - 8.2 Handing

The content contained in this document is copyrighted by the company and the use, disclosure, distribution, reproduction or other similar misconduct of the contents of this document without consent or authorization is strictly prohibited. Unless authorized by the company in writing or in the contract 18 / 19

| AMELIN | PRODUCT GROUP | REV | ISSUE DATE |
|--------|---------------|---------|------------|
| | Customer SPEC | Rev. PO | May.26,20' |

- 1. Do not subject the module to mechanical shock or to excessive force On its surface
- 2. To avoid contamination on the display surface, do not touch the module Surface with bare hands
- 3. Must be the correct way to connec the power cable, otherwise it will Cause damage
 - 8.3 transportation
 - 1. In transporting, Goods are strictly prohibited during the ultra-high stacking Extrusion, upside down, entire vehicle liading and unloading.
 - 2. Persons who handle the module should be grounded through adequate methods.
 - 8.4 Other
 - 1. About this specification, if any question, go through both sides agreement Post-processing.
 - 2. Any changes must get into contant with each other, get the agreement then To change, and update the contents to record.