




EF02

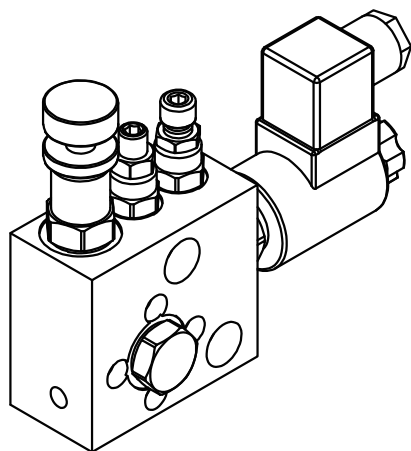


EF03

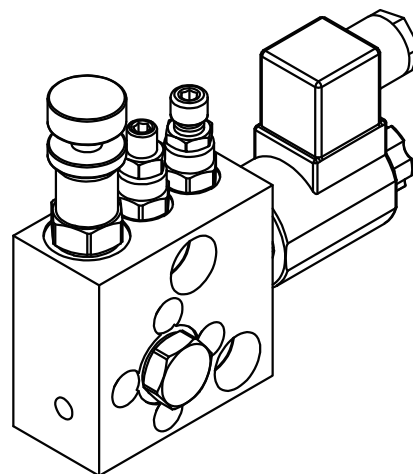


ET02

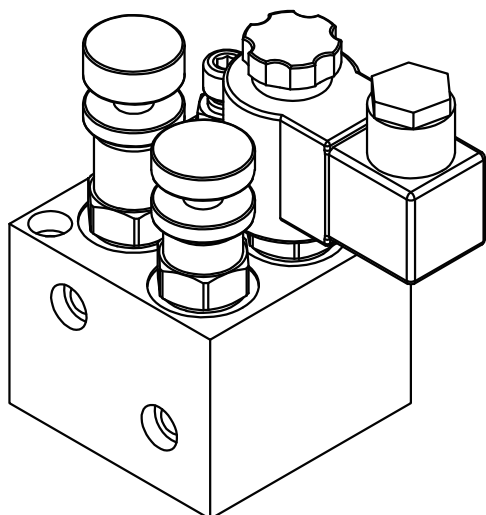


ET04

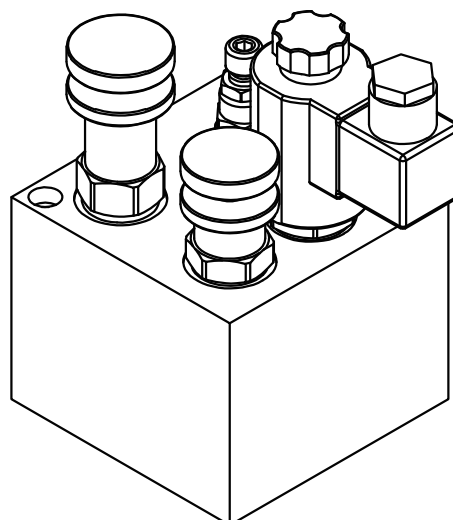

ET06

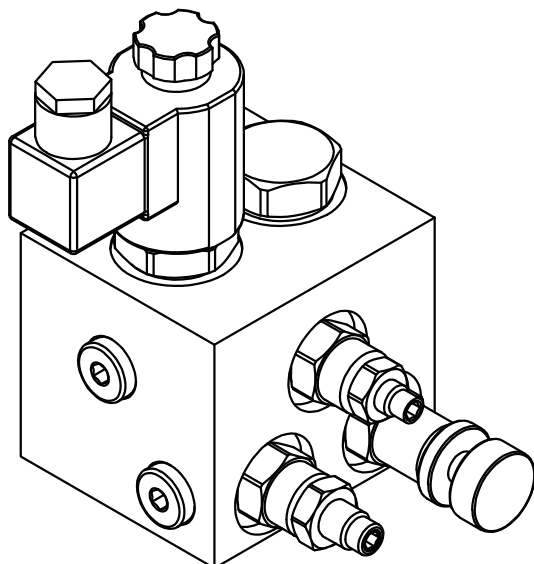

ET08

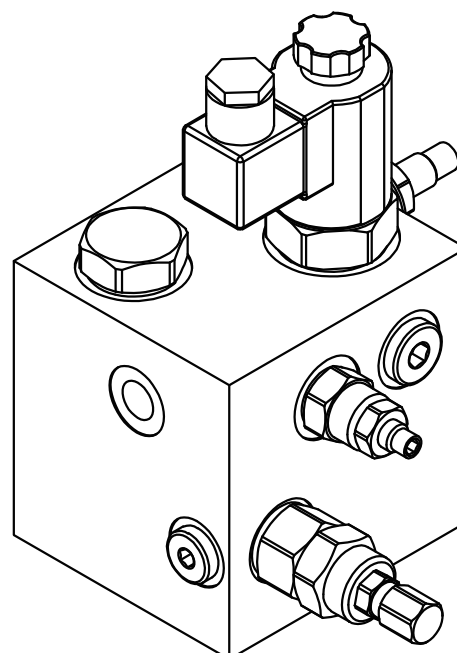

升降阀组系列
Lift Valve Group Series
EF02-CBN



产品说明:


Product description:

此系统阀组，装配在齿轮泵法兰出口及其他系统上。通用于单动油缸，升降物流，汽修升降机。体积小，不占空间等特点。
The system valves are assembled on the flange outlet of gear pump and other systems. It is widely used in single-action cylinder, lifting logistics, automobile repair lifts, etc. Small size, no space, etc.

EF02-插装阀规格				
单向阀	节流阀	溢流阀	电磁阀	手动下降
LCV08-20	LVN04-20	LRV08-20	LSV08-20-01	LVN04-21

油路动作:

Functional symbols:




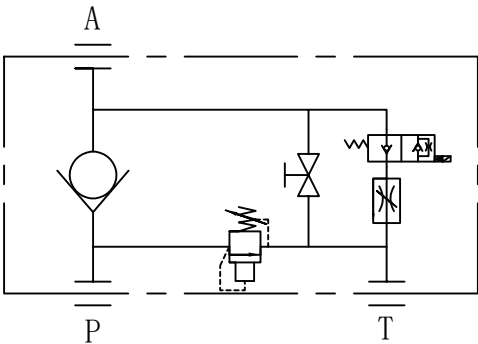


型号说明:

Model description:

EF02 -A-P-3F-A

表面处理 surface treatment
N:不处理 No disposal
G:镀锌处理 Galvanizing treatment
A:阳极处理 Anodic treatment
口径规格 Caliber specification
3F:PT3/8
00: 其他 Other
螺纹规格 Thread specification
P:PT锥管螺纹 PT tapered pipe thread
G:G直管螺纹 G straight pipe thread
材质 Texture of material
A:铝合金 Aluminium alloy (6061 T6)
S:钢材 Steel products (45#)

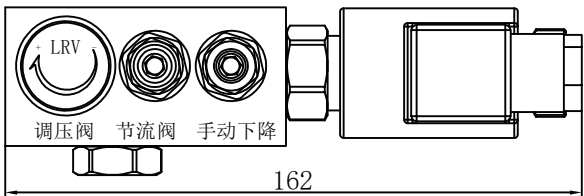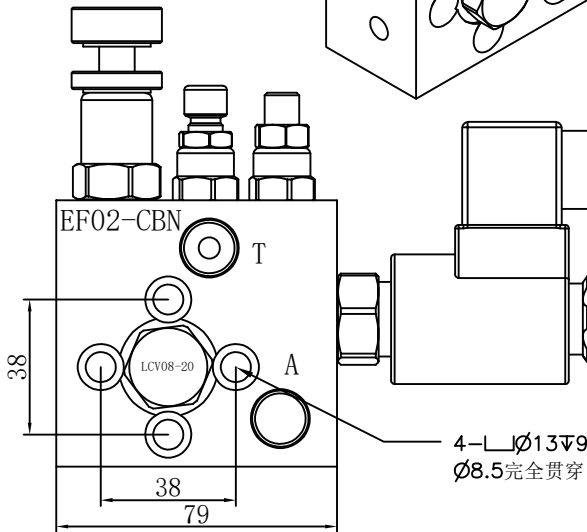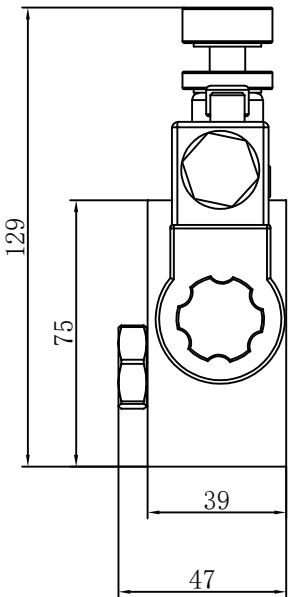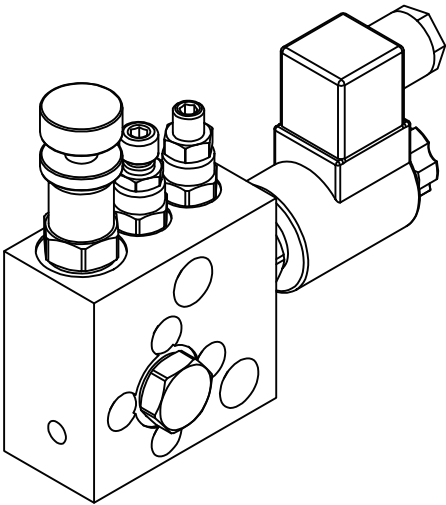

EF02-GPY



升降阀组系列

Lift Valve Group Series

EF03-CBN



产品说明:

Product description:


此系统阀组，装配在齿轮泵法兰出口及其他系统上。通用于单动油缸，升降物流，汽修升降机。体积小，不占空间等特点。

The system valves are assembled on the flange outlet of gear pump and other systems. It is widely used in single-action cylinder, lifting logistics, automobile repair lifts, etc. Small size, no space, etc.

EF02-插装阀规格				
单向阀	节流阀	溢流阀	电磁阀	手动下降
LCV08-20	LVN04-20	LRV08-20	LSV10-20	LVN04-21

油路动作:

Functional symbols:



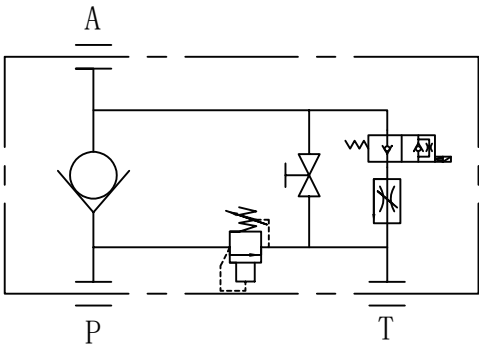


型号说明:

Model description:

EF03 -A-P-4F-A

表面处理 surface treatment
N:不处理 No disposal
G:镀锌处理 Galvanizing treatment
A:阳极处理 Anodic treatment
口径规格 Caliber specification
4F:PT1/2
00: 其他 Other
螺纹规格 Thread specification
P:PT锥管螺纹 PT tapered pipe thread
G:G直管螺纹 G straight pipe thread
材质 Texture of material
A:铝合金 Aluminium alloy (6061 T6)
S:钢材 Steel products (45#)

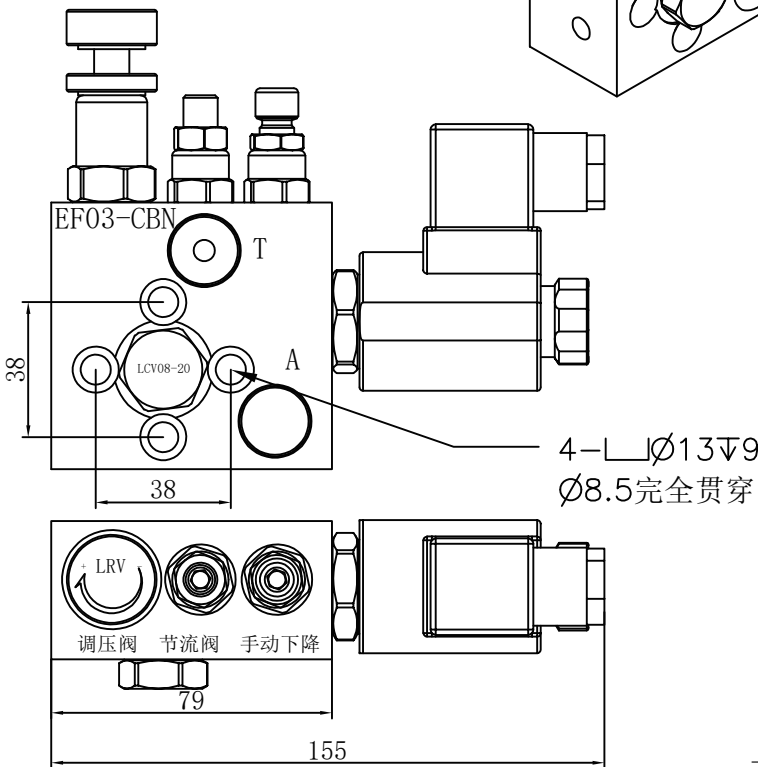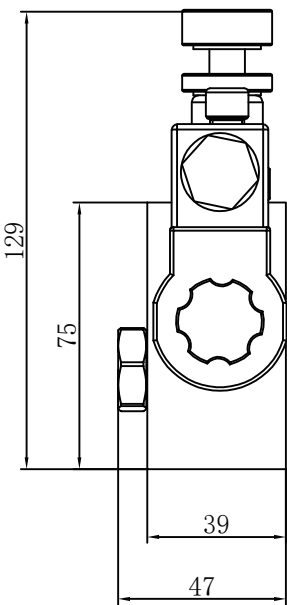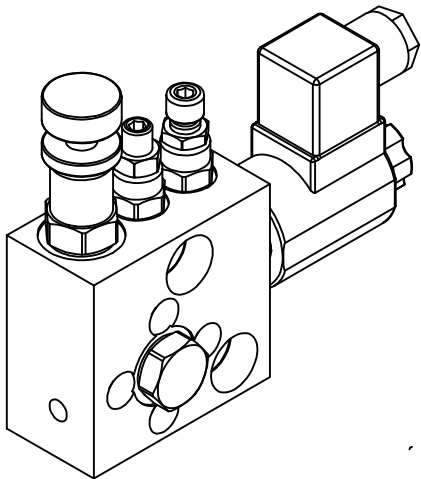

升降阀组系列

Lift Valve Group Series

EF03-GPY



产品说明:

Product description:


此系统阀组，装配在齿轮泵法兰出口及其他系统上。通用于单动油缸，升降物流，汽修升降机。体积小，不占空间等特点。

The system valves are assembled on the flange outlet of gear pump and other systems. It is widely used in single-action cylinder, lifting logistics, automobile repair lifts, etc. Small size, no space, etc.

EF02-插装阀规格				
单向阀	节流阀	溢流阀	电磁阀	手动下降
LCV08-2 0	LVN04- 20	LRV08- 20	LSV10 -20	

油路动作:




Functional symbols:

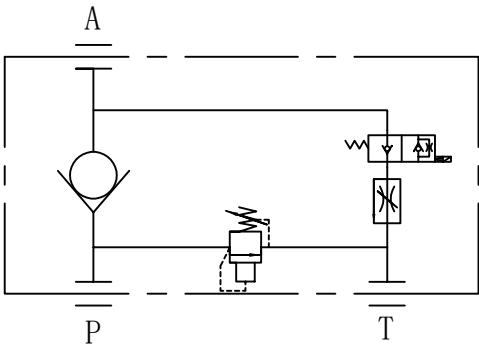

型号说明:

Model description:

EF03 -A-P-4F-A

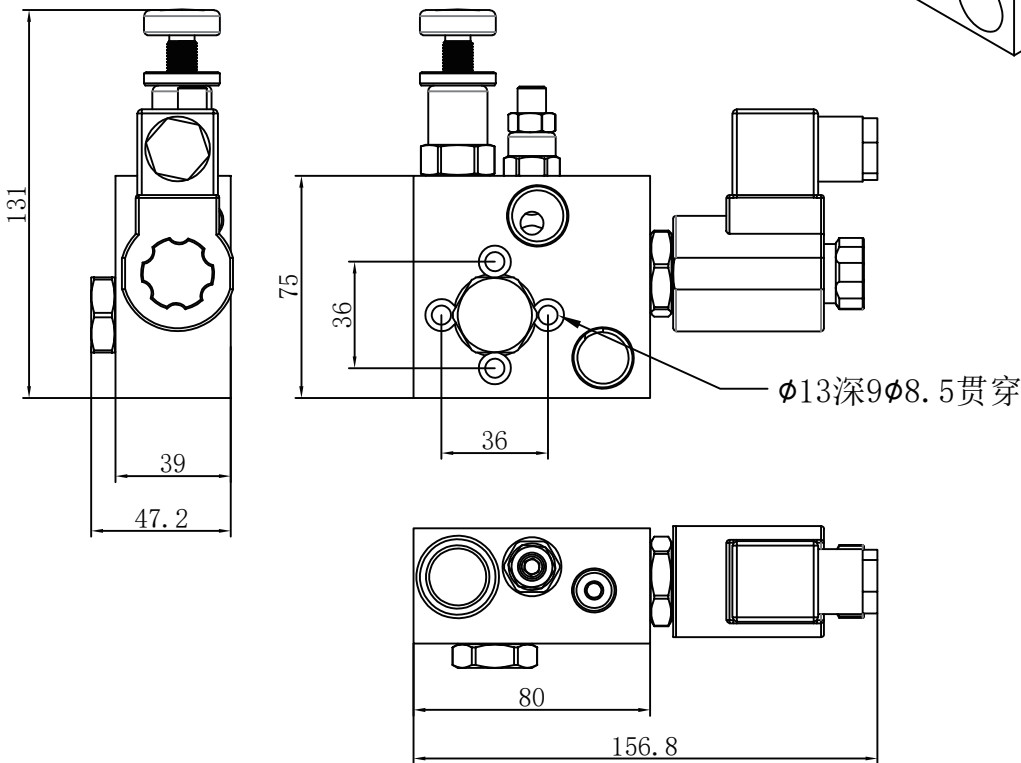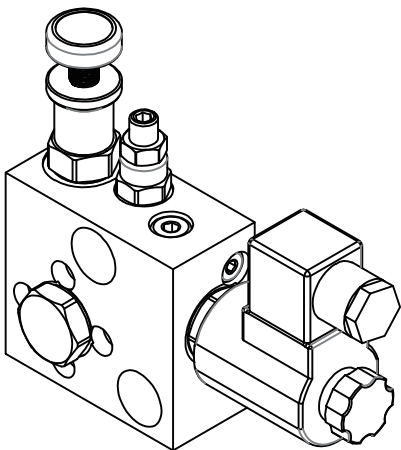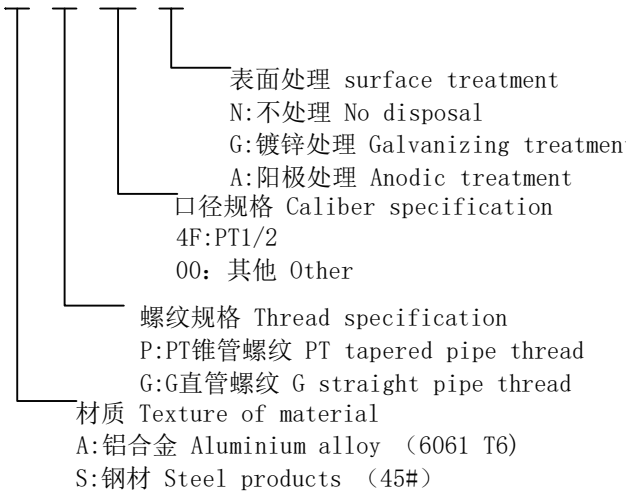

升降阀组系列

Lift Valve Group Series

ET02



产品说明:



Product description:

此系统阀组, 通用于升降设备或单动油缸系统回路, 配套使用, 体积小不占空间, 动作稳定等优势。
This system valve group is commonly used in lifting equipment or single-acting cylinder system circuit. It has the advantages of small size, no space occupation and stable movement.

ET02-插装阀规格				
单向阀	节流阀	溢流阀	电磁阀	手动下降
LCV08-2	LNV08-	LRV08-	LSV08	LNV04-21
0	20	20	-20	

油路动作:

Functional symbols:

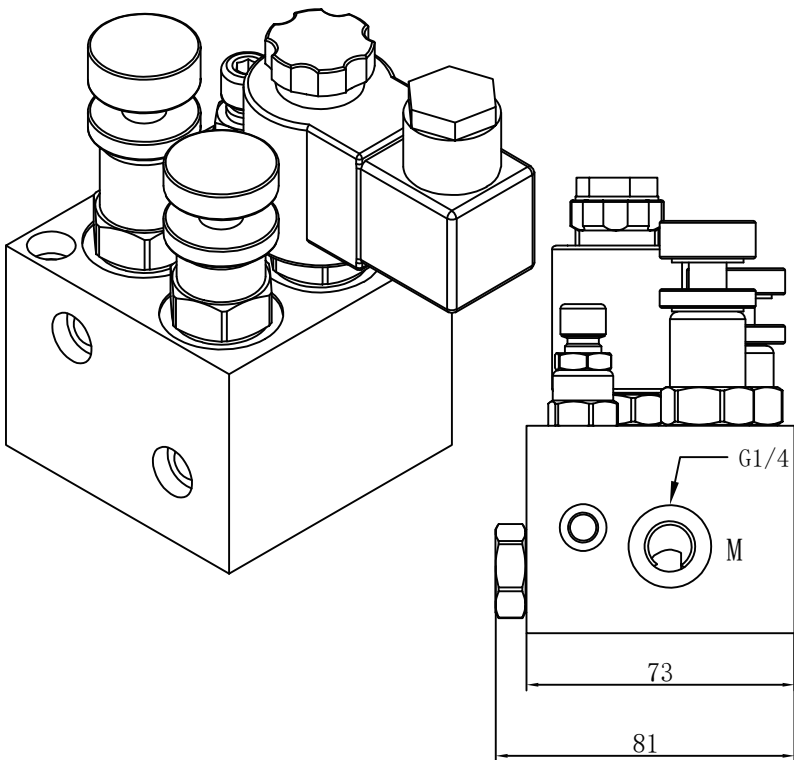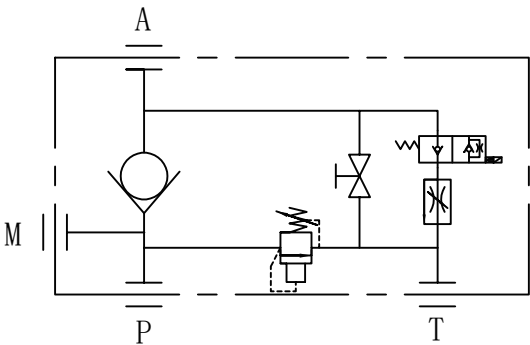

型号说明:

Model description:

ET02 -A-G-4F-A



额定流量
Rated flow
rate
20L/min

表面处理 surface treatment
N:不处理 No disposal
G:镀锌处理 Galvanizing treatment
A:阳极处理 Anodic treatment

口径规格 Caliber specification
4F:G1/2
00: 其他 Other

螺纹规格 Thread specification
P:PT锥管螺纹 PT tapered pipe thread
G:G直管螺纹 G straight pipe thread

材质 Texture of material
A:铝合金 Aluminium alloy (6061 T6)
S:钢材 Steel products (45#)

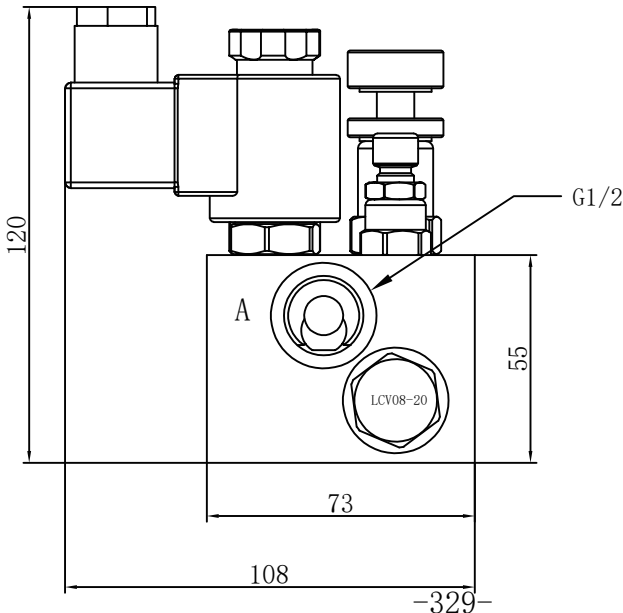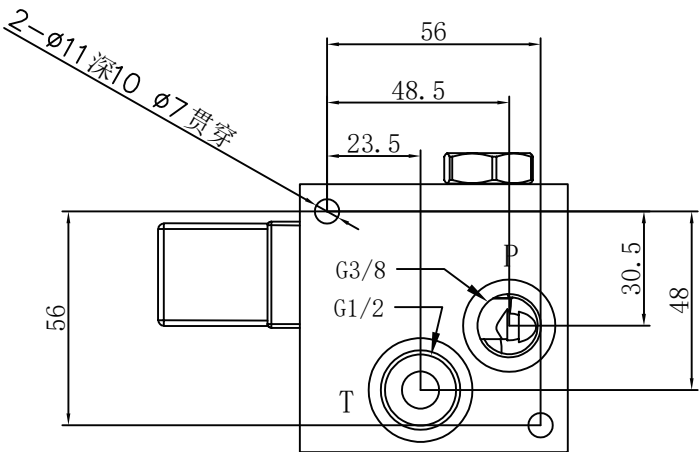

升降阀组系列
Lift Valve Group Series
ET04-D90



产品说明:


Product description:

此系统阀组, 通用于升降设备或单动油缸系统回路, 配套使用, 体积小不占空间, 动作稳定等优势。
This system valve group is commonly used in lifting equipment or single-acting cylinder system circuit. It has the advantages of small size, no space occupation and stable movement.

EF04-D90-插装阀规格				
单向阀	节流阀	溢流阀	电磁阀	手动下降
LCV10-20	LVN08-20	LRV08-20	LSV10-20	LVN04-21

油路动作:

Functional symbols:

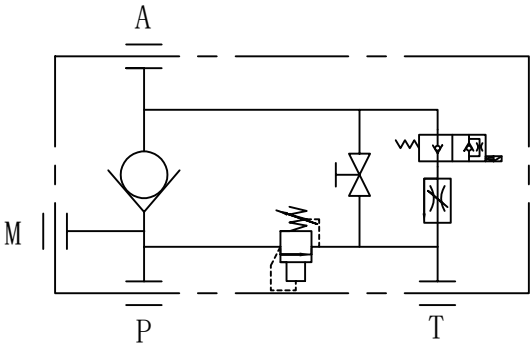

型号说明:

Model description:

ET04 -A-G-4F-A



额定流量
Rated flow rate
50L/min

表面处理 surface treatment
N:不处理 No disposal
G:镀锌处理 Galvanizing treatment
A:阳极处理 Anodic treatment

口径规格 Caliber specification
4F:G1/2
00: 其他 Other

螺纹规格 Thread specification
P:PT锥管螺纹 PT tapered pipe thread
G:G直管螺纹 G straight pipe thread

材质 Texture of material
A:铝合金 Aluminium alloy (6061 T6)
S:钢材 Steel products (45#)

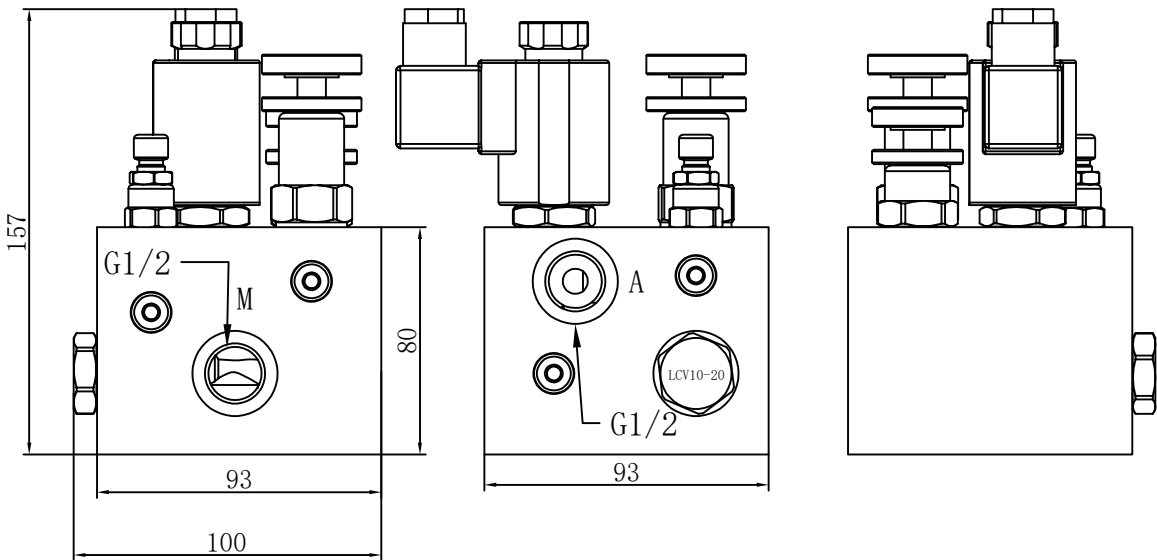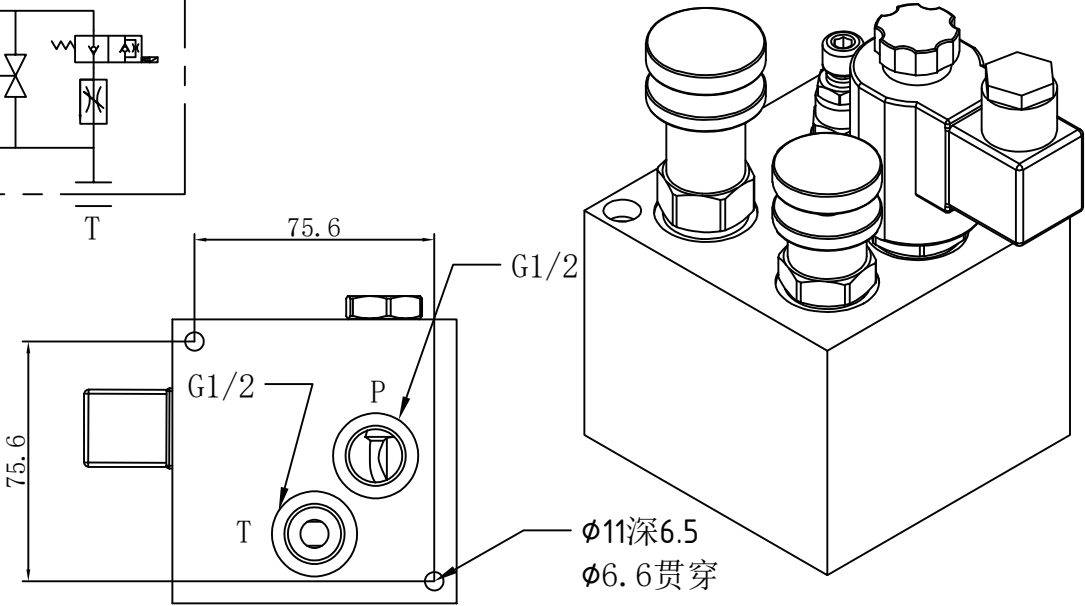

升降阀组系列
Lift Valve Group Series
ET04-D100



产品说明:



Product description:

此系统阀组,通用于升降设备或单动油缸系统回路,配套使用,体积小不占空间,动作稳定等优势。
This system valve group is commonly used in lifting equipment or single-acting cylinder system circuit. It has the advantages of small size, no space occupation and stable movement.

EF04-D100-插装阀规格				
单向阀	节流阀	溢流阀	电磁阀	手动下降
LCV10-20	LN10-20	LRV10-20	LSV10-20	LN10-21

油路动作:

Functional symbols:

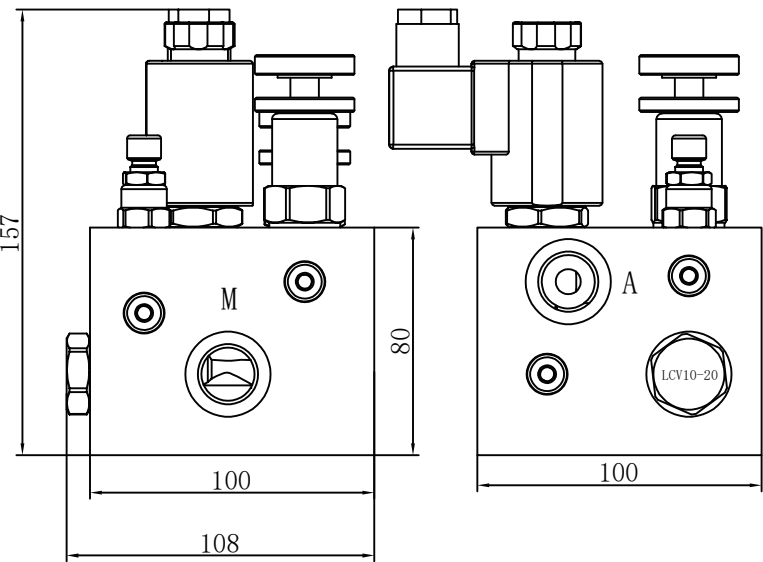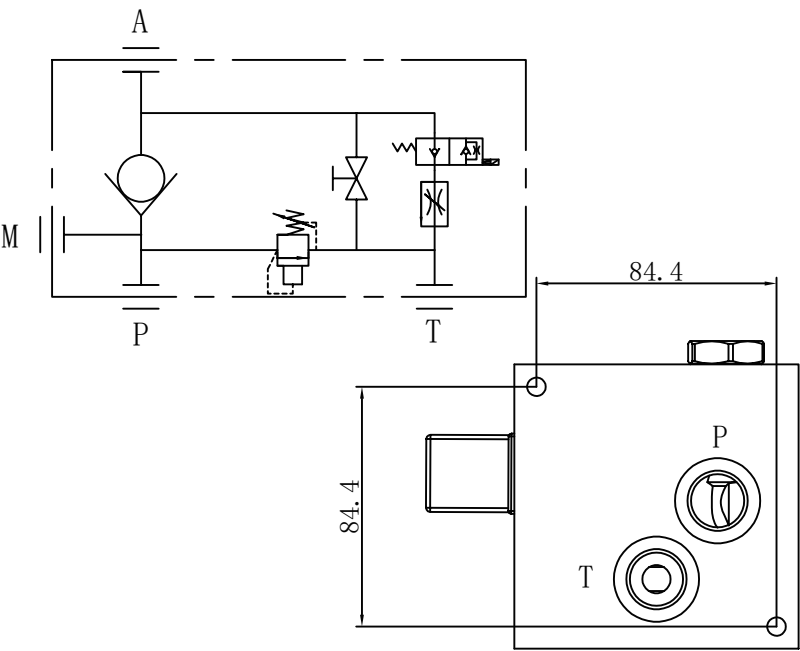

型号说明:

Model description:

ET04 -A-G-4F-A



额定流量
Rated flow rate
50L/min

表面处理 surface treatment
N:不处理 No disposal
G:镀锌处理 Galvanizing treatment
A:阳极处理 Anodic treatment

口径规格 Caliber specification
4F:G1/2
00: 其他 Other

螺纹规格 Thread specification
P:PT锥管螺纹 PT tapered pipe thread
G:G直管螺纹 G straight pipe thread

材质 Texture of material
A:铝合金 Aluminium alloy (6061 T6)
S:钢材 Steel products (45#)

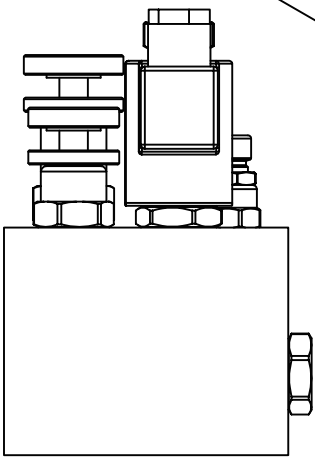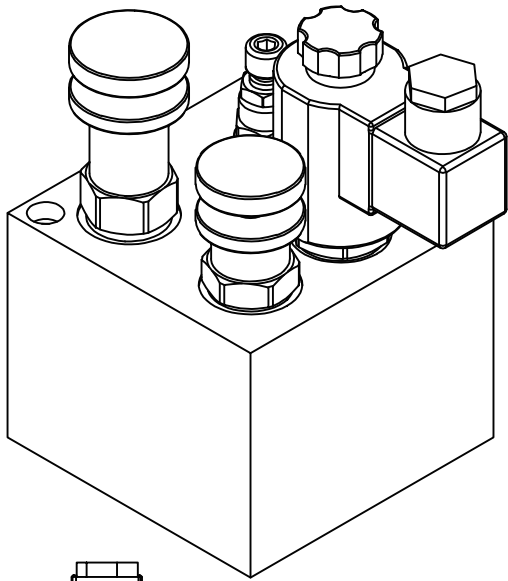

升降阀组系列
Lift Valve Group Series
ET04-06/ET06-SV10



产品说明:


Product description:

此系统阀组, 通用于升降设备或单动油缸系统回路, 配套使用, 体积小不占空间, 动作稳定等优势。
This system valve group is commonly used in lifting equipment or single-acting cylinder system circuit. It has the advantages of small size, no space occupation and stable movement.

ET06-插装阀规格				
单向阀	节流阀	溢流阀	电磁阀	手动下降
LCV10-2 0	LNV08- 20-2	LRV08- 20	LSV10 -20	LNV08-2 0

油路动作:

Functional symbols:




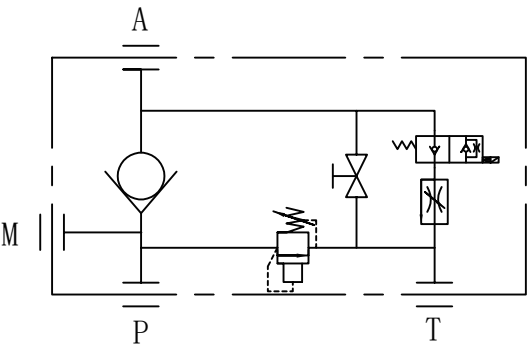


型号说明:

Model description:

ET04-06-A-M-22-A

- 表面处理 surface treatment
N:不处理 No disposal
G:镀锌处理 Galvanizing treatment
A:阳极处理 Anodic treatment
- 口径规格 Caliber specification
22:M22*1.5
00: 其他 Other
- 螺纹规格 Thread specification
P:PT锥管螺纹 PT tapered pipe thread
G:G直管螺纹 G straight pipe thread
M:公制螺纹 Metric thread
- 材质 Texture of material
A:铝合金 Aluminium alloy (6061 T6)
S:钢材 Steel products (45#)

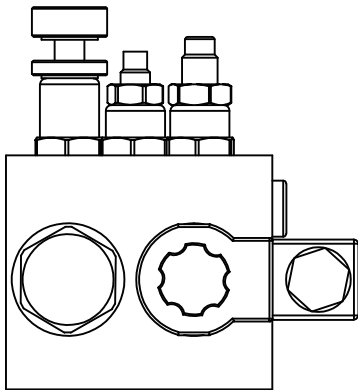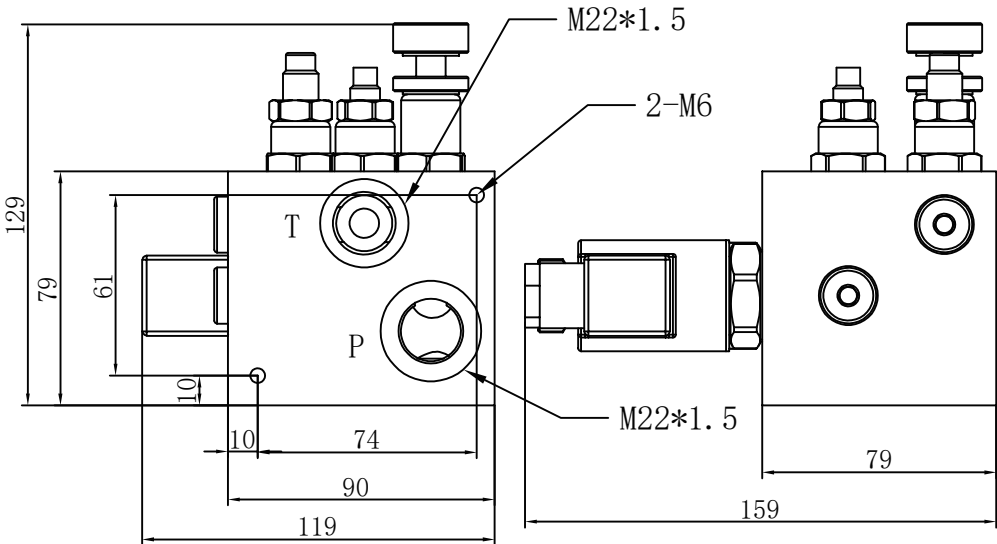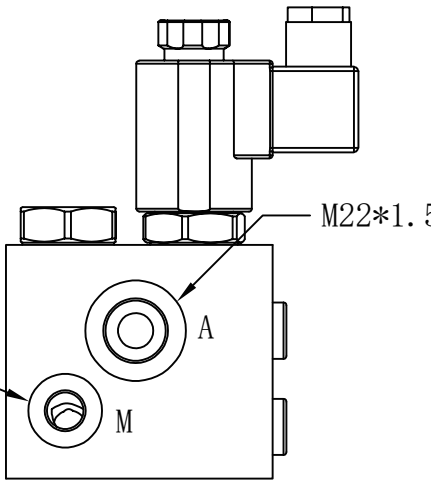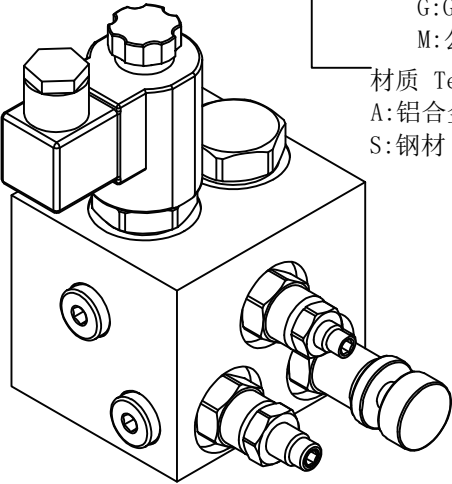

升降阀组系列
Lift Valve Group Series
ET06



产品说明:


Product description:

此系统阀组, 通用于升降设备或单动油缸系统回路, 配套使用, 体积小不占空间, 动作稳定等优势。
This system valve group is commonly used in lifting equipment or single-acting cylinder system circuit. It has the advantages of small size, no space occupation and stable movement.

ET06-插装阀规格				
单向阀	节流阀	溢流阀	电磁阀	手动下降
LCV12-2 0	LNV08- 20-2	LRV08- 20	LSV12 -20	LNV08-2 0

油路动作:

Functional symbols:

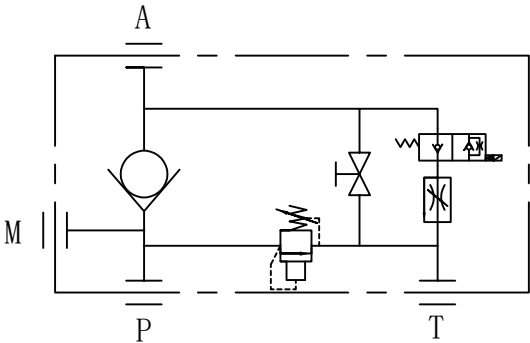

型号说明:

Model description:




ET06 -A-M-22-A

表面处理 surface treatment
N:不处理 No disposal
G:镀锌处理 Galvanizing treatment
A:阳极处理 Anodic treatment

口径规格 Caliber specification
22:M22*1.5
00: 其他 Other

螺纹规格 Thread specification
P:PT锥管螺纹 PT tapered pipe thread
G:G直管螺纹 G straight pipe thread
M:公制螺纹 Metric thread

材质 Texture of material
A:铝合金 Aluminium alloy (6061 T6)
S:钢材 Steel products (45#)

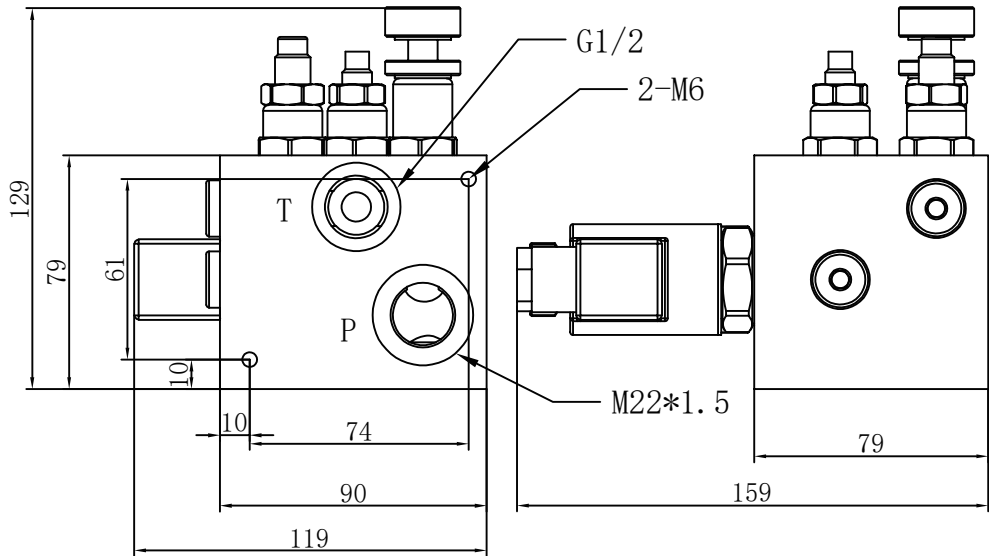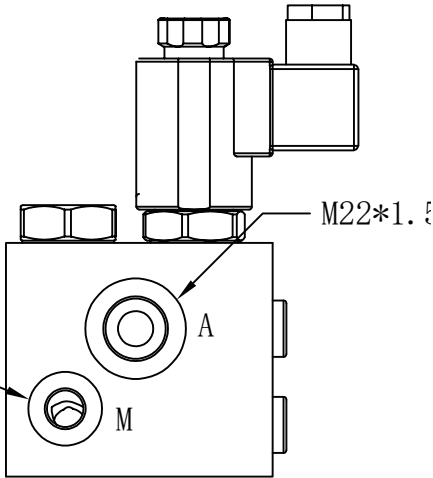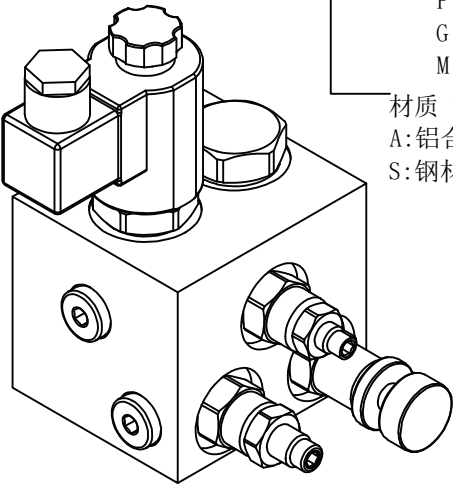

升降阀组系列
Lift Valve Group Series
ET08



产品说明:


Product description:

此系统阀组, 通用于升降设备或单动油缸系统回路, 配套使用, 体积小不占空间, 动作稳定等优势。
This system valve group is commonly used in lifting equipment or single-acting cylinder system circuit. It has the advantages of small size, no space occupation and stable movement.

ET06-插装阀规格				
单向阀	节流阀	溢流阀	电磁阀	手动下降
LCV12-2 0	LVN12- 20	LRV10- 00	LSV16 -20	LVN08-2 0

油路动作:

Functional symbols:



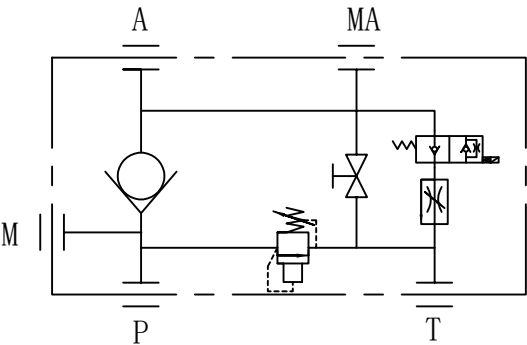


型号说明:

Model description:

ET08 -A-M-22-A

- 表面处理 surface treatment
N:不处理 No disposal
G:镀锌处理 Galvanizing treatment
A:阳极处理 Anodic treatment
- 口径规格 Caliber specification
22:M22*1.5
00: 其他 Other
- 螺纹规格 Thread specification
P:PT锥管螺纹 PT tapered pipe thread
G:G直管螺纹 G straight pipe thread
M:公制螺纹 Metric thread
- 材质 Texture of material
A:铝合金 Aluminium alloy (6061 T6)
S:钢材 Steel products (45#)

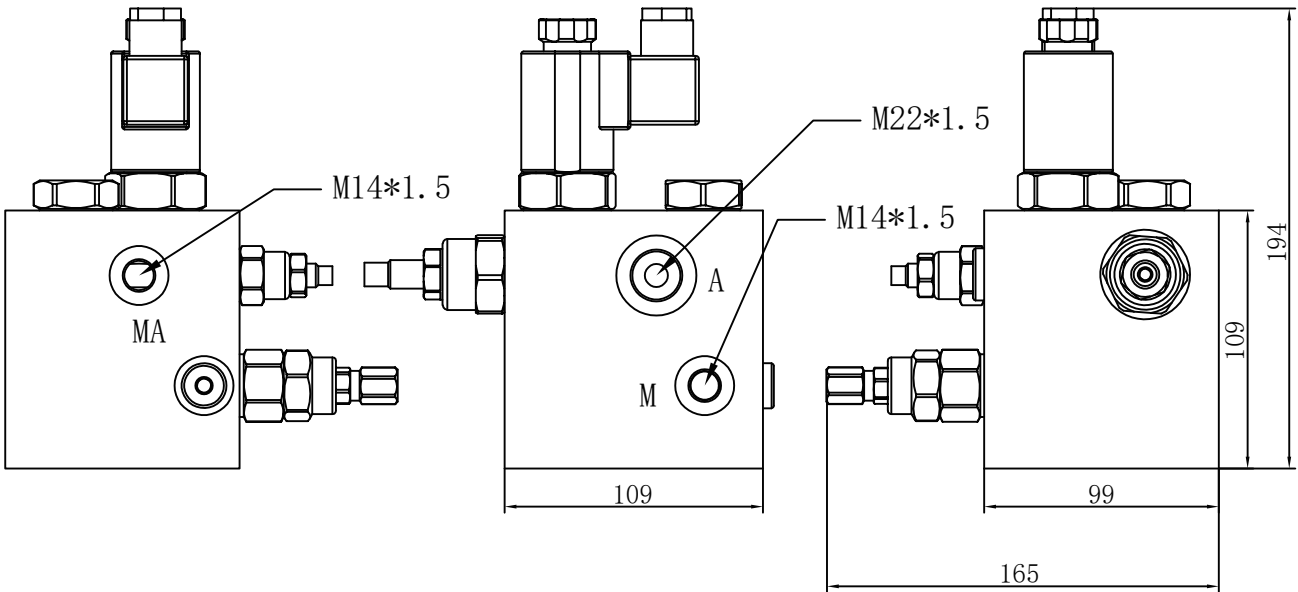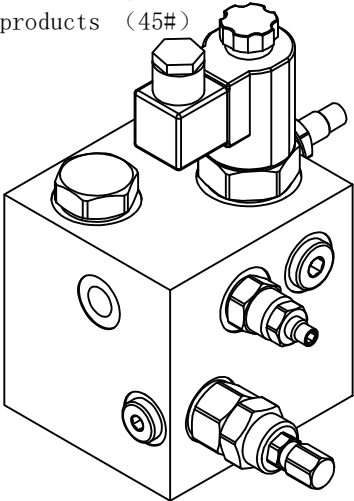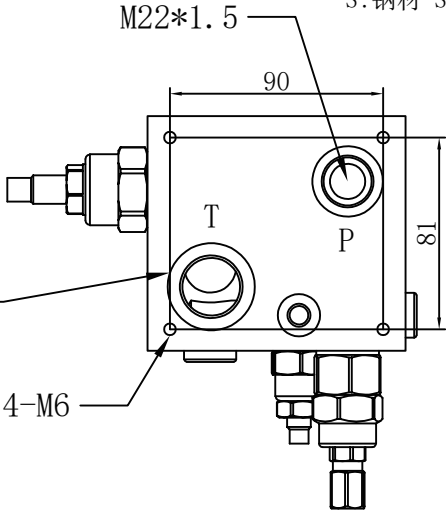

升降阀组系列

Lift Valve Group Series

ET08-X



产品说明:

Product description:




此系统阀组, 通用于升降设备或单动油缸系统回路, 配套使用, 体积小不占空间, 动作稳定等优势。

This system valve group is commonly used in lifting equipment or single-acting cylinder system circuit. It has the advantages of small size, no space occupation and stable movement.

ET06-插装阀规格				
单向阀	节流阀	溢流阀	电磁阀	手动下降
LCV16-2	LVN12-	LXRV12	LSV16	LVN10-2
0	20	-26	-20	0

油路动作:



Functional symbols:

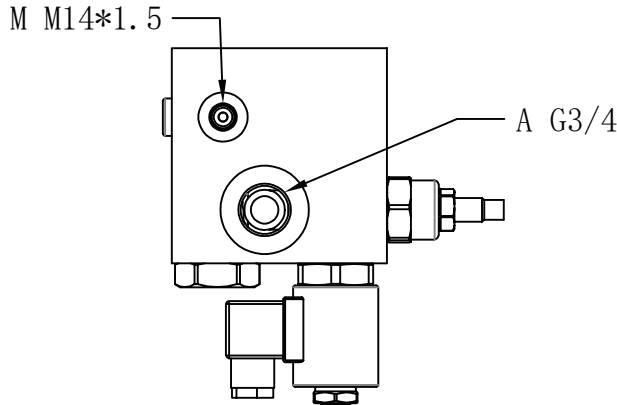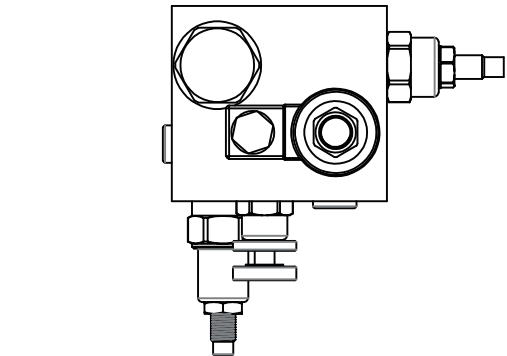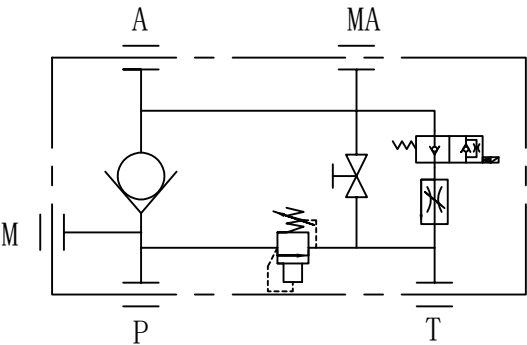

型号说明:

Model description:

ET08 -A-G-6F-A

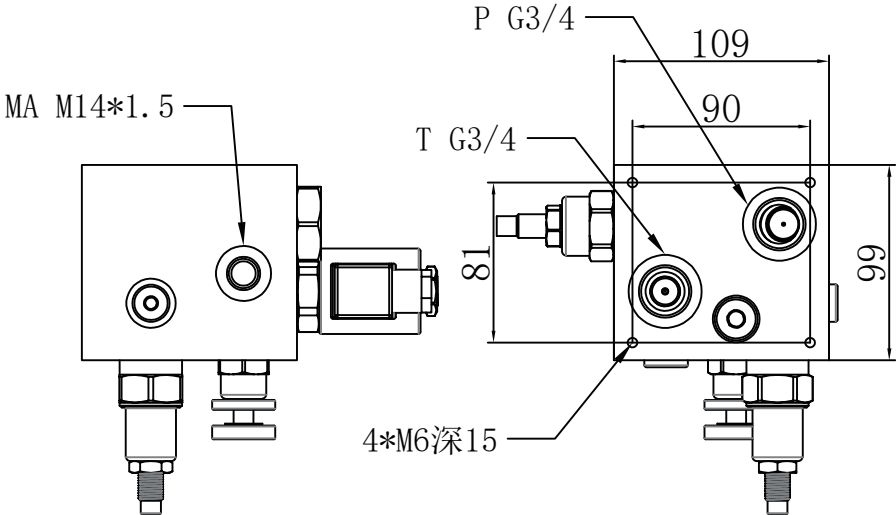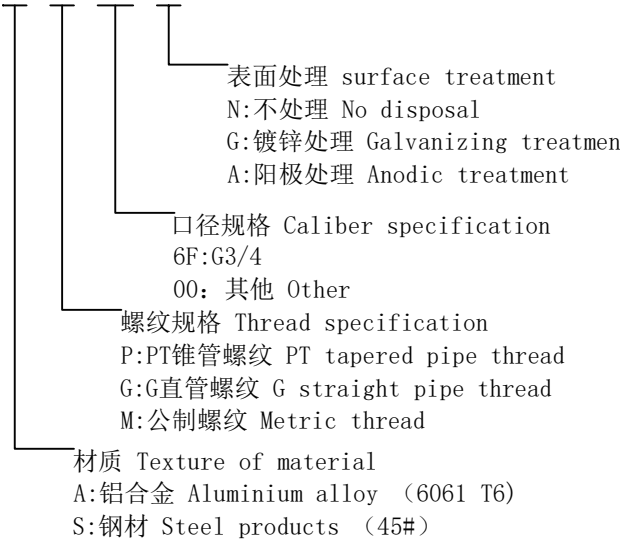

升降阀组系列

Lift Valve Group Series

ET02-02SV



产品说明:

Product description:






此系统阀组, 通用于升降设备或单动油缸系统回路, 配套使用, 体积小不占空间, 动作稳定等优势。

This system valve group is commonly used in lifting equipment or single-acting cylinder system circuit. It has the advantages of small size, no space occupation and stable movement.

项目号	零件号	说明	数量
1	ET02-02SV	阀块 (材质7006B铝合金)	1
2	LVN08-20	节流阀	1
3	LVN04-21	手动下降阀	1
4	LRV08-20	溢流阀	1
5	LSV08-20	常闭电磁阀	2
6	LVN08-21	大流量节流阀	1
7	LCV08-20	单向阀	1
8	M8*1-ED	堵头	4
9	ZG1/16	堵头	2

油路动作:

Functional symbols:

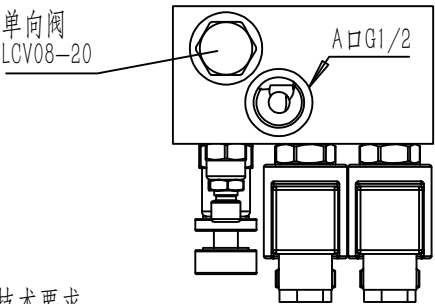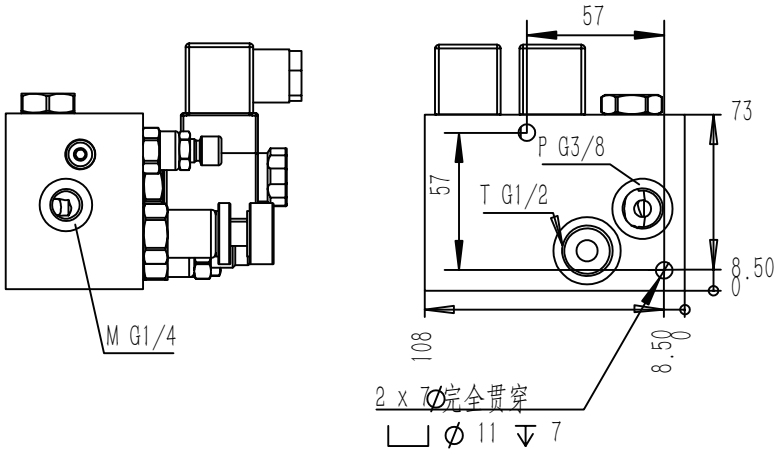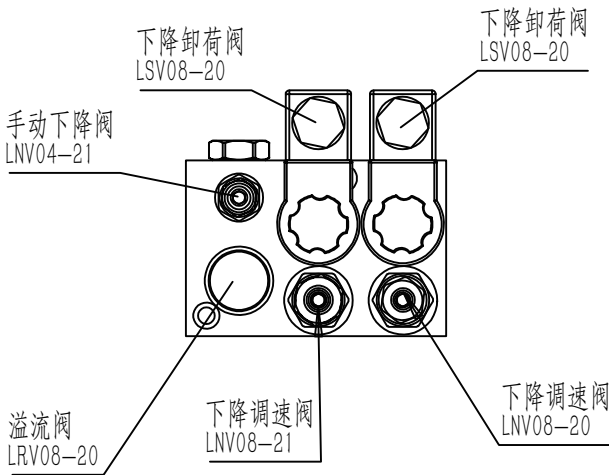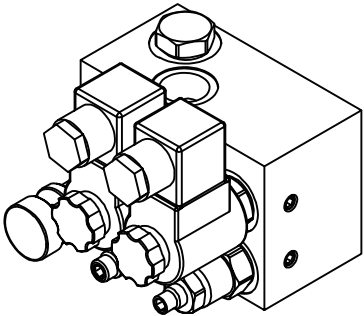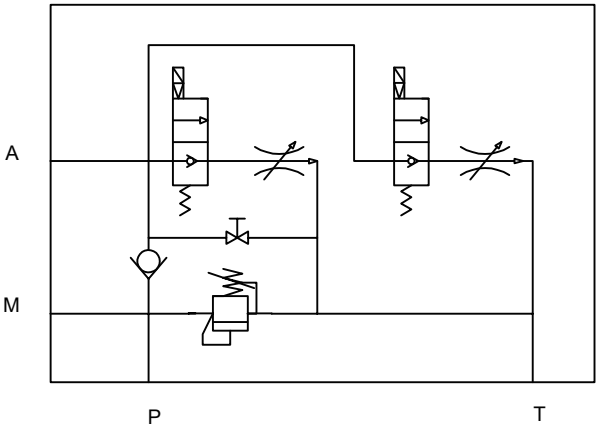

技术要求

- 1、最大流量: 45LPM;
- 2、最大输入压力: 240bar;
- 3、油口尺寸:
- 4、阀要求工作油液清洁度: NAS 7。

升降阀组系列
Lift Valve Group Series
ET02-02SV-R2



产品说明:







Product description:

此系统阀组, 通用于升降设备或单动油缸系统回路, 配套使用, 体积小不占空间, 动作稳定等优势。
This system valve group is commonly used in lifting equipment or single-acting cylinder system circuit. It has the advantages of small size, no space occupation and stable movement.

项目号	零件号	说明	数量
1	ET02-02SV-R2	阀块 (材质7006B铝合金)	1
2	LVN08-20B	节流阀	1
3	LVN08-20	手动下降阀	1
4	LRV08-20	溢流阀	1
5	LSV08-20	常闭电磁阀	2
7	LCV10-20	单向阀	1

油路动作:

Functional symbols:

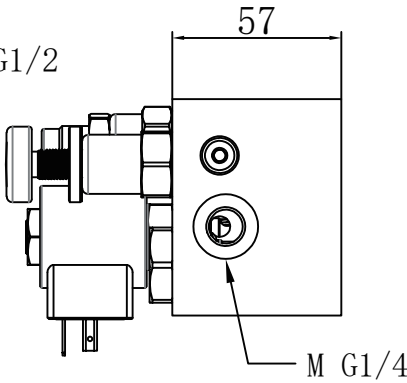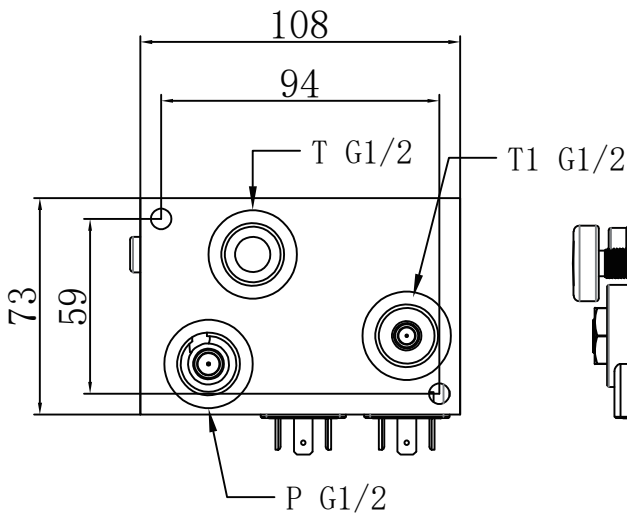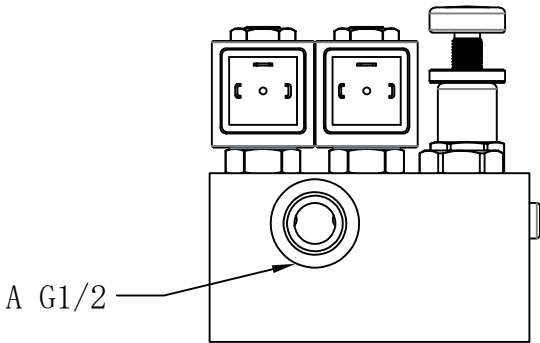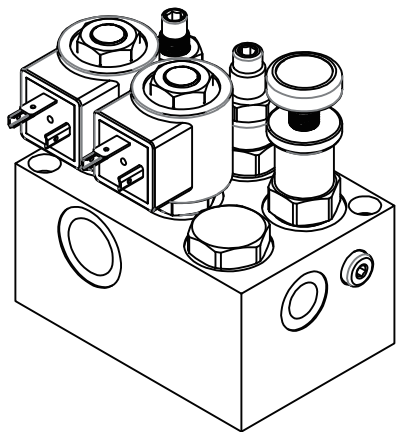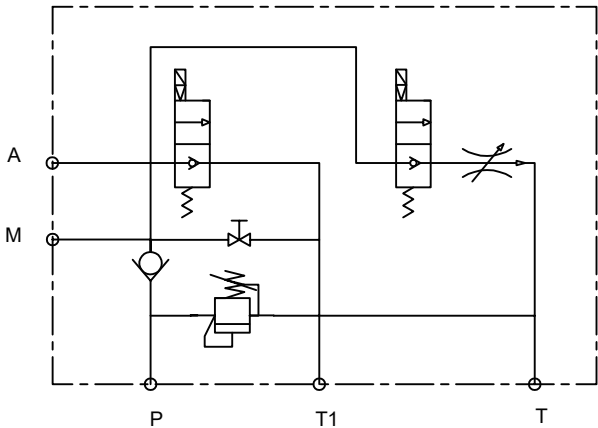

技术要求

- 1、最大流量: 50LPM;
- 2、最大输入压力: 240bar;
- 3、油口尺寸:
- 4、阀要求工作油液清洁度: NAS 7。

升降阀组系列
Lift Valve Group Series
ET04-02SV



产品说明:



Product description:

此系统阀组, 通用于升降设备或单动油缸系统回路, 配套使用, 体积小不占空间, 动作稳定等优势。
This system valve group is commonly used in lifting equipment or single-acting cylinder system circuit. It has the advantages of small size, no space occupation and stable movement.

项目号	零件号	说明	数量
1	ET04-2SV	阀块 (材质7006B铝合金)	1
2	LVN08-20	节流阀	1
3	LSV10-20	常闭电磁阀	2
4	LCV10-20	单向阀	1
5	M10*1-ED	M10*1 ED堵头	4
6	LVN10-21	大流量节流阀	2
7	LVN10-20-M	节流阀 (带手柄)	1
8	LRV10-20A	溢流阀	1

油路动作:

Functional symbols:

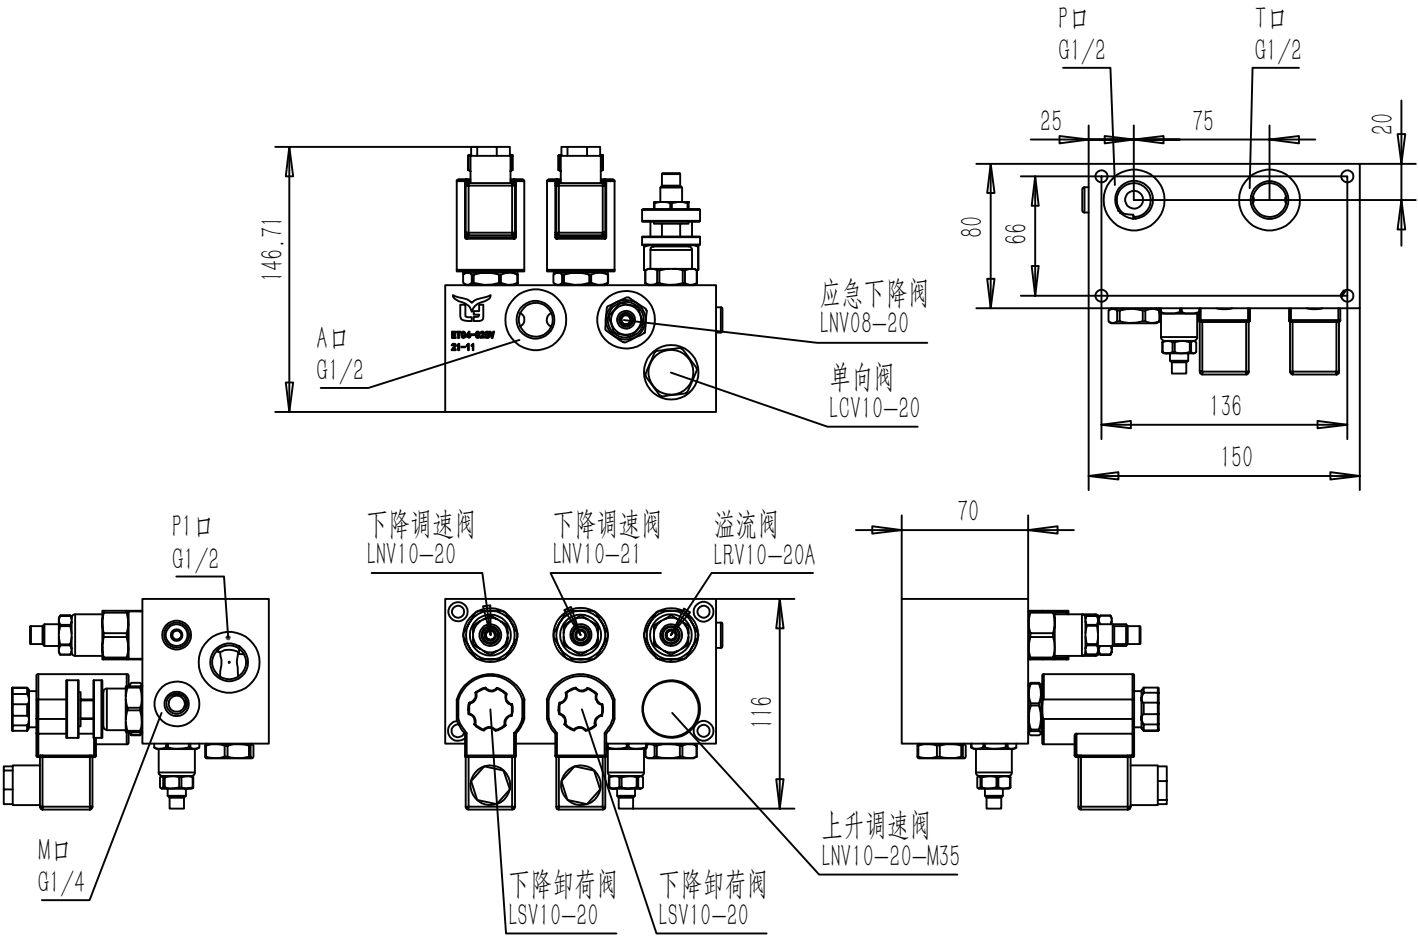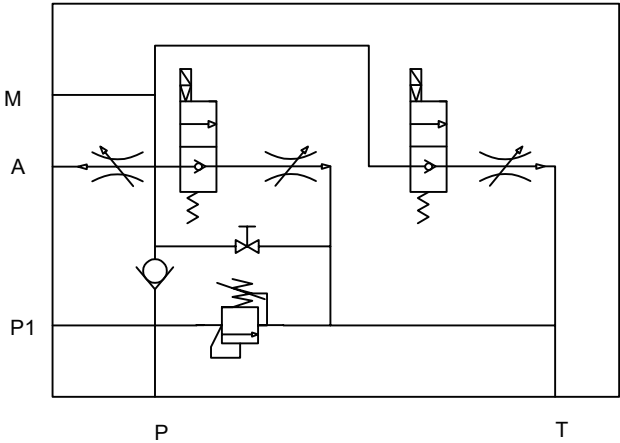

- 技术要求
- 1、最大流量: 70LPM;
 - 2、最大输入压力: 240bar;
 - 3、油口尺寸:
 - 4、阀要求工作油液清洁度: NAS 7。

升降阀组系列

Lift Valve Group Series

ET04-03SV



产品说明:






Product description:

此系统阀组, 通用于升降设备或单动油缸系统回路, 配套使用, 体积小不占空间, 动作稳定等优势。
This system valve group is commonly used in lifting equipment or single-acting cylinder system circuit. It has the advantages of small size, no space occupation and stable movement.

项目号	零件号	说明	数量
1	L0716-22	阀块	1
2	LSV10-22	10双向常闭	1
3	LSV10-20-M	10常闭电磁阀带手动	1
4	LSV10-20	10常闭电磁阀	1
5	LVN10-20	节流阀	1
6	LRV10-20A	溢流阀	1
7	LVN10-21	节流阀	1
8	G1/2-ED	ED堵头	1
9	LCV10-20	单向阀	1
10	G1/4-ED	ED堵头	2
11	M10*1-ED	ED堵头	2
12	16孔线圈-DG		3

油路动作:

Functional symbols:

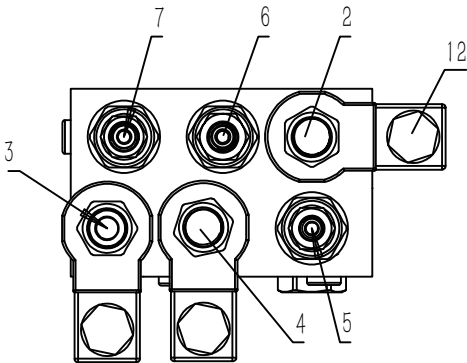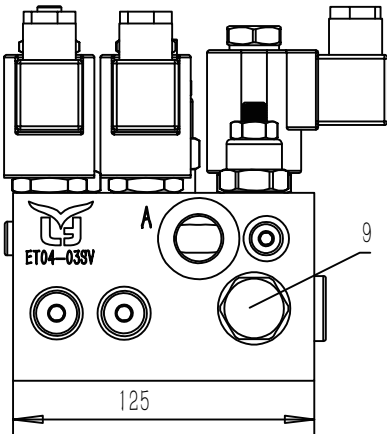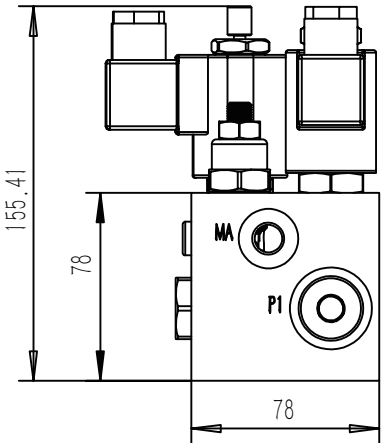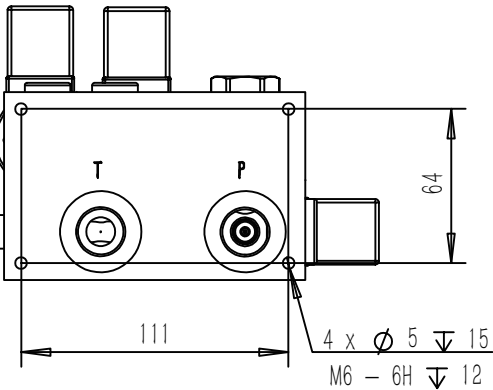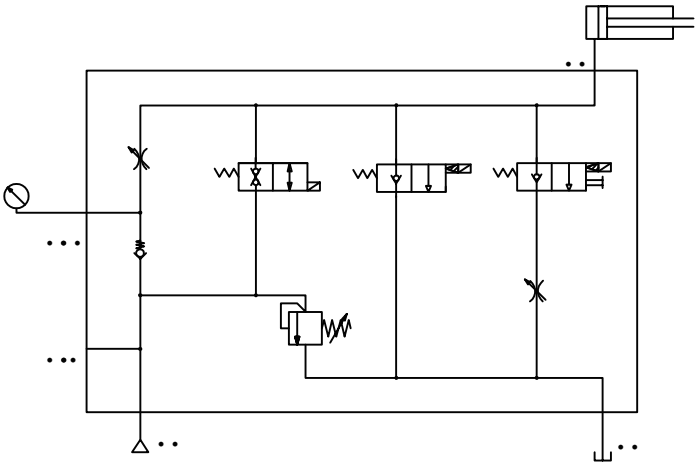

技术要求

- 1、最大流量: 80LPM;
- 2、最大输入压力: 240bar;
- 3、油口尺寸: P/P1/A/T为G1/2油口, MA为G1/4油口;
- 4、阀要求工作油液清洁度: NAS 7。

升降阀组系列

Lift Valve Group Series

ET06-02SV



产品说明:

Product description:



此系统阀组, 通用于升降设备或单动油缸系统回路, 配套使用, 体积小不占空间, 动作稳定等优势。

This system valve group is commonly used in lifting equipment or single-acting cylinder system circuit. It has the advantages of small size, no space occupation and stable movement.

项目号	零件号	说明	数量	材料
1	ET06-02SV	阀块	1	铝合金
2	LCV12-20	单向阀	1	组合体
3	LSV12-20	电磁阀常闭	2	组合体
4	LRV10-20A	溢流阀	1	组合体
5	LVN10-20	节流阀	2	组合体
6	LVN10-21	节流阀	1	组合体
7	G1/4-ED	ED堵头	1	组合体
8	16孔线圈		2	

油路动作:

Functional symbols:

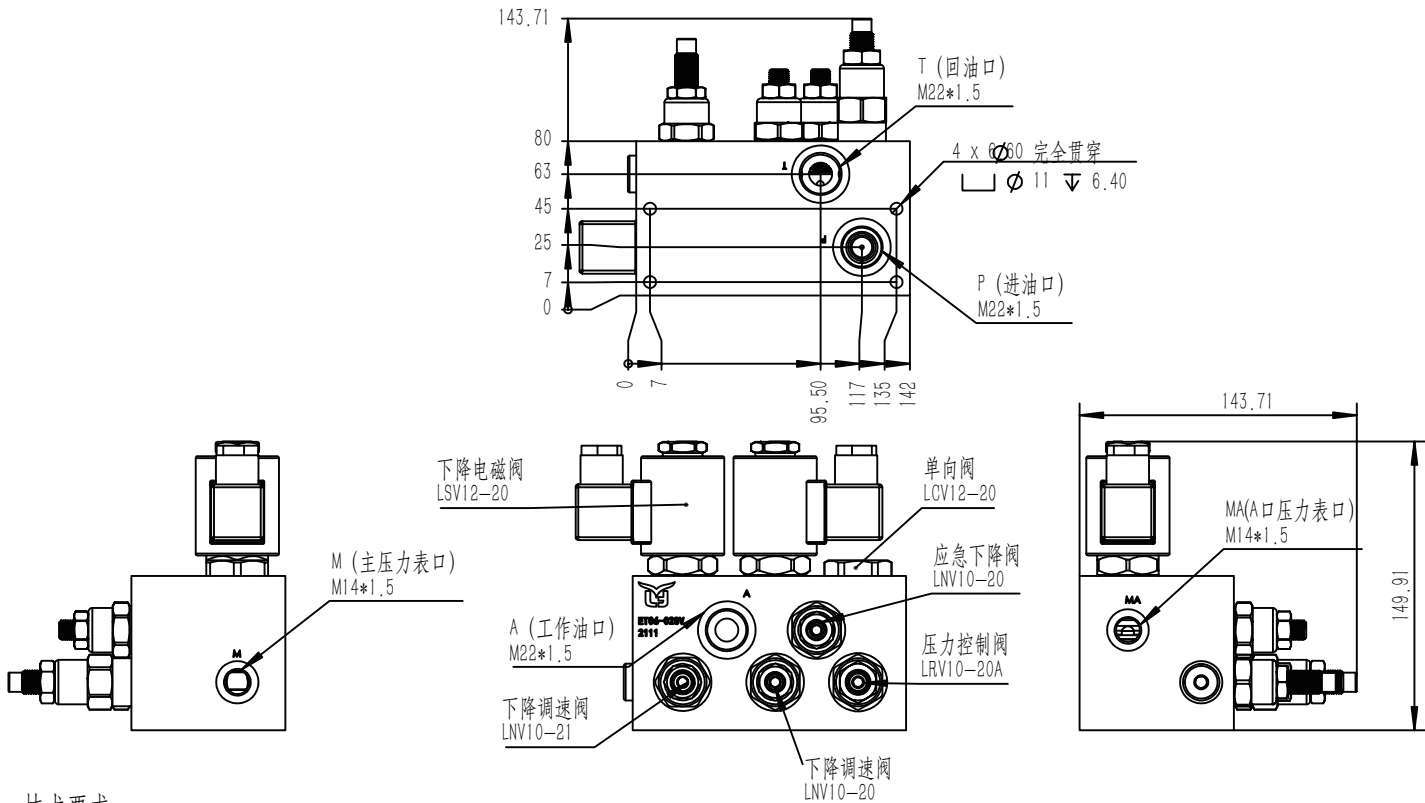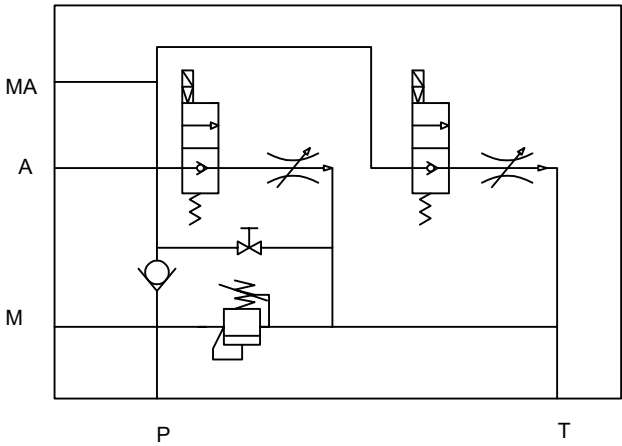

技术要求

- 1、最大流量: 140LPM;
- 2、最大输入压力: 240bar;
- 3、油口尺寸:
- 4、阀要求工作油液清洁度: NAS 7。

升降阀组系列

Lift Valve Group Series

ET08-02SV



产品说明:

Product description:




此系统阀组, 通用于升降设备或单动油缸系统回路, 配套使用, 体积小不占空间, 动作稳定等优势。

This system valve group is commonly used in lifting equipment or single-acting cylinder system circuit. It has the advantages of small size, no space occupation and stable movement.

项目号	零件号	说明	数量
1	ET08-02SV-02	阀块 (材质7006B)	1
2	LVN16-20	节流阀	1
3	LVN12-20	节流阀	2
4	LCV16-20	单向阀	1
5	LSV16-20	电磁阀 (常闭)	2
6	LXRV12-26	溢流阀	1
7	G1/2-ED	ED堵头	3
8	G3/8-ED	ED堵头	2
9	G1/4-ED	ED堵头	1
10	G3/4-ED	ED堵头	1
11	16孔线圈		2

油路动作:

Functional symbols:






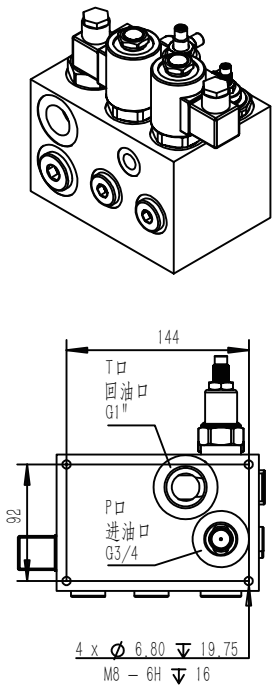
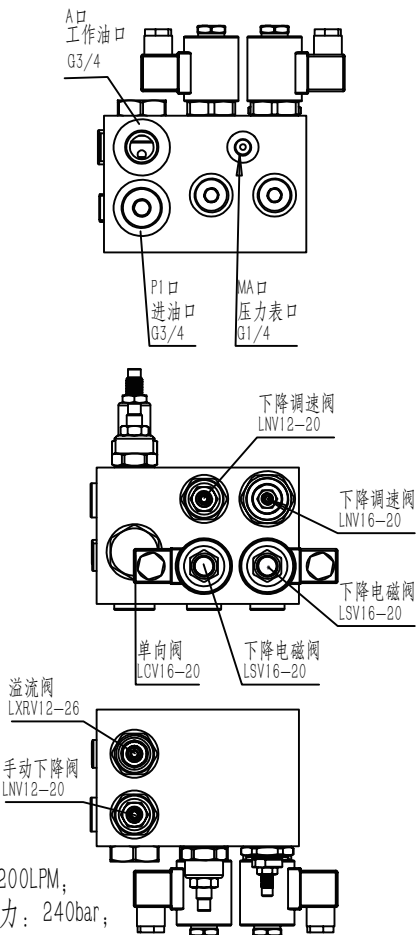
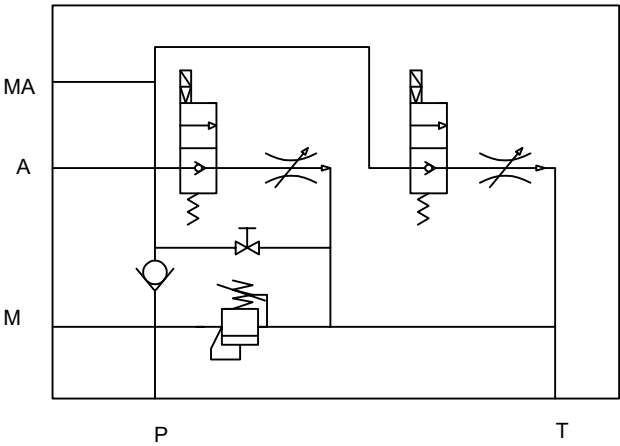


- 技术要求
- 1、最大流量: 200LPM;
 - 2、最大输入压力: 240bar;
 - 3、油口尺寸:
 - 4、阀要求工作油液清洁度: NAS 7。

升降阀组系列

Lift Valve Group Series

LZXK-DZY-01

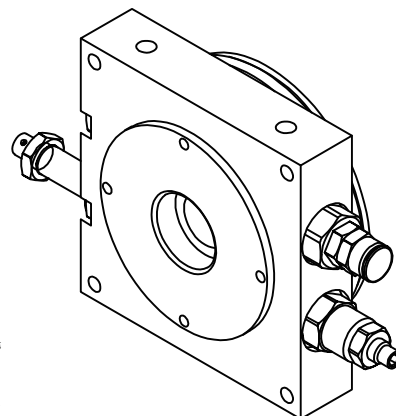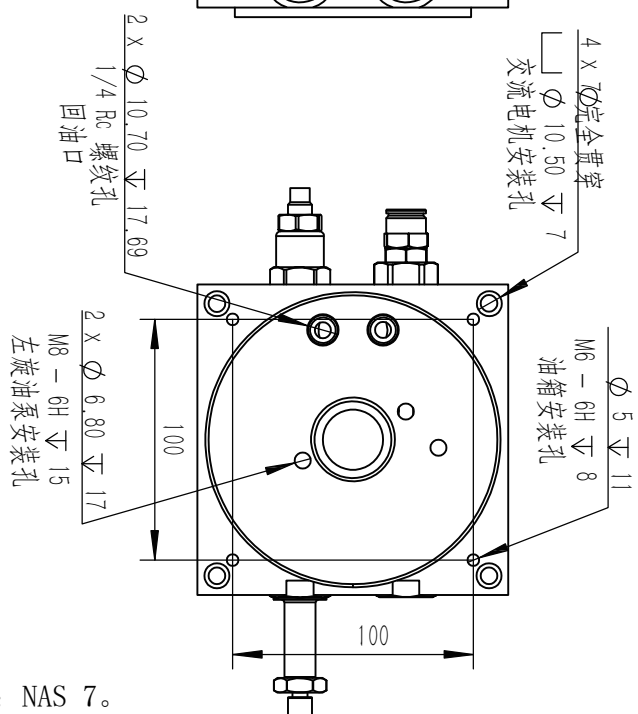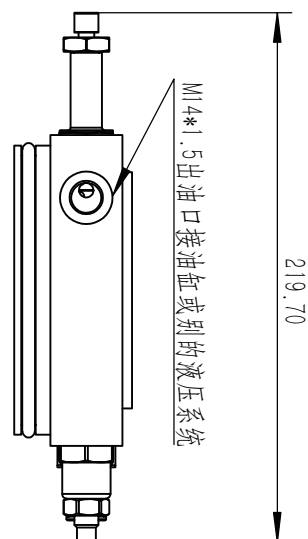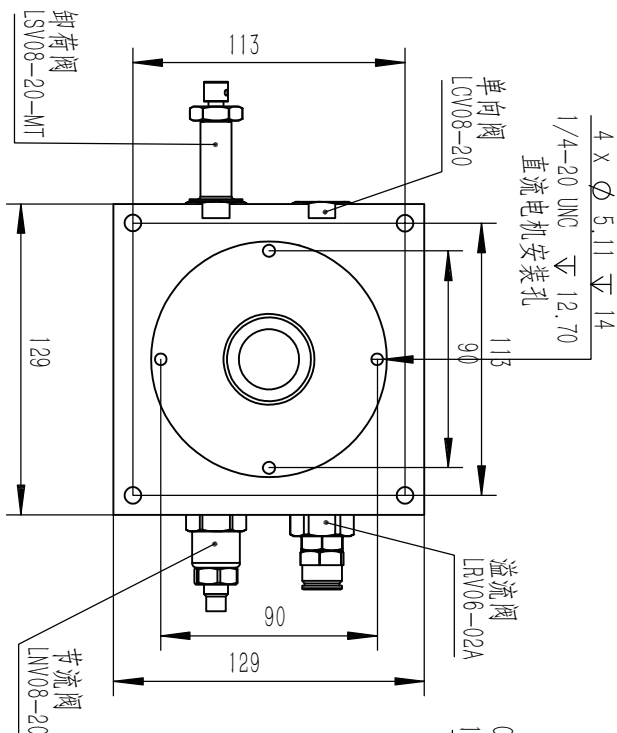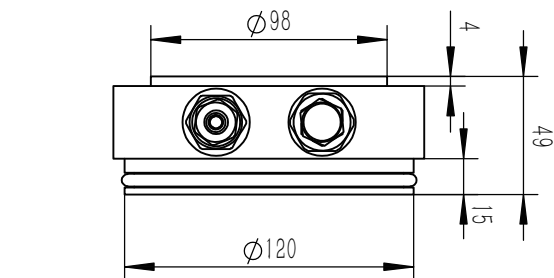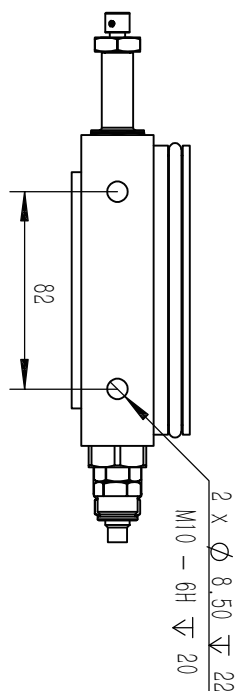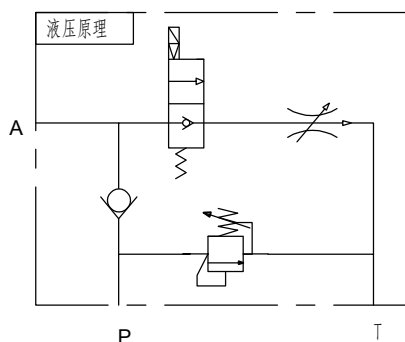

技术要求

- 1、最大流量：30LPM;
- 2、最大输入压力：240bar;
- 3、油口尺寸：M14*1.5
- 4、阀要求工作油液清洁度：NAS 7。

LZXK-DZY-02











升降阀组系列

Lift Valve Group Series

LZXX-DZY-03







液压原理:

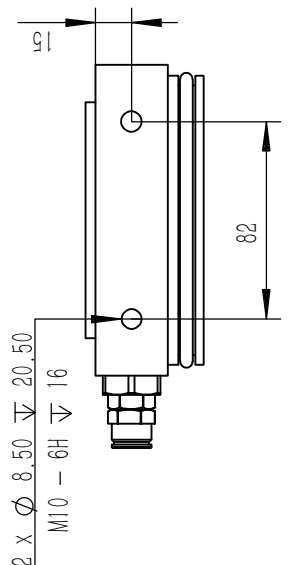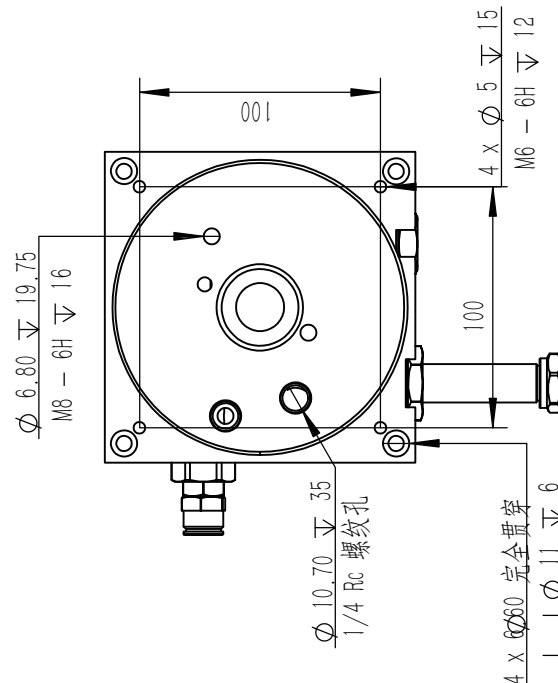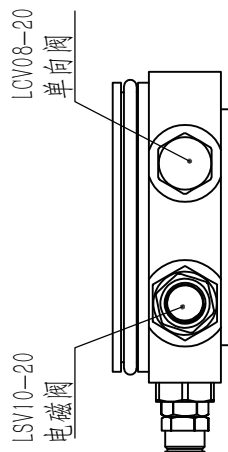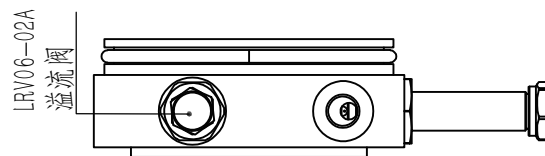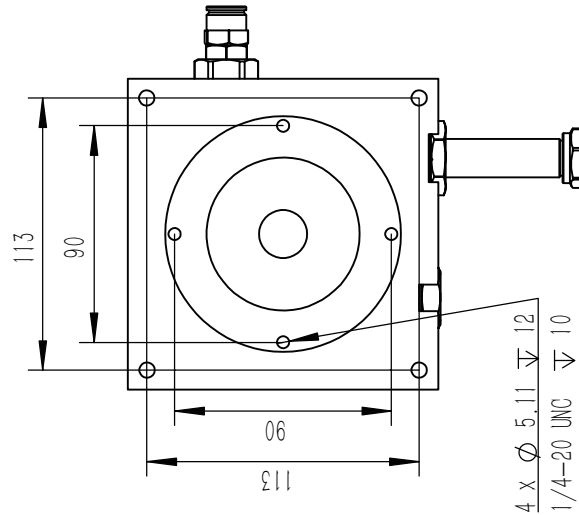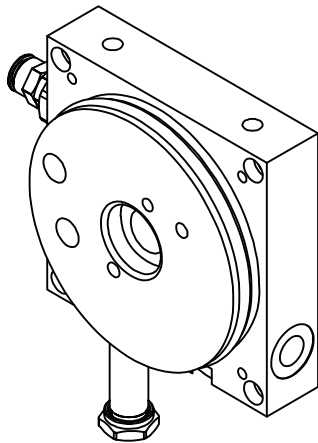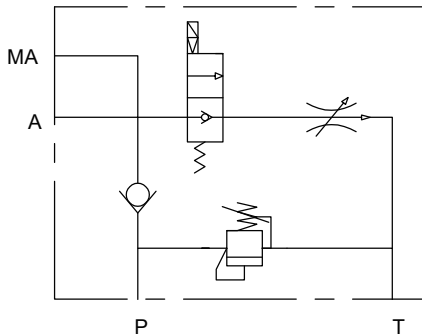

技术要求

- 1、最大流量: 45LPM;
- 2、最大输入压力: 240bar;
- 3、油口尺寸: M14*1.5
- 4、阀要求工作油液清洁度: NAS 7。

LZXK-SZY-01

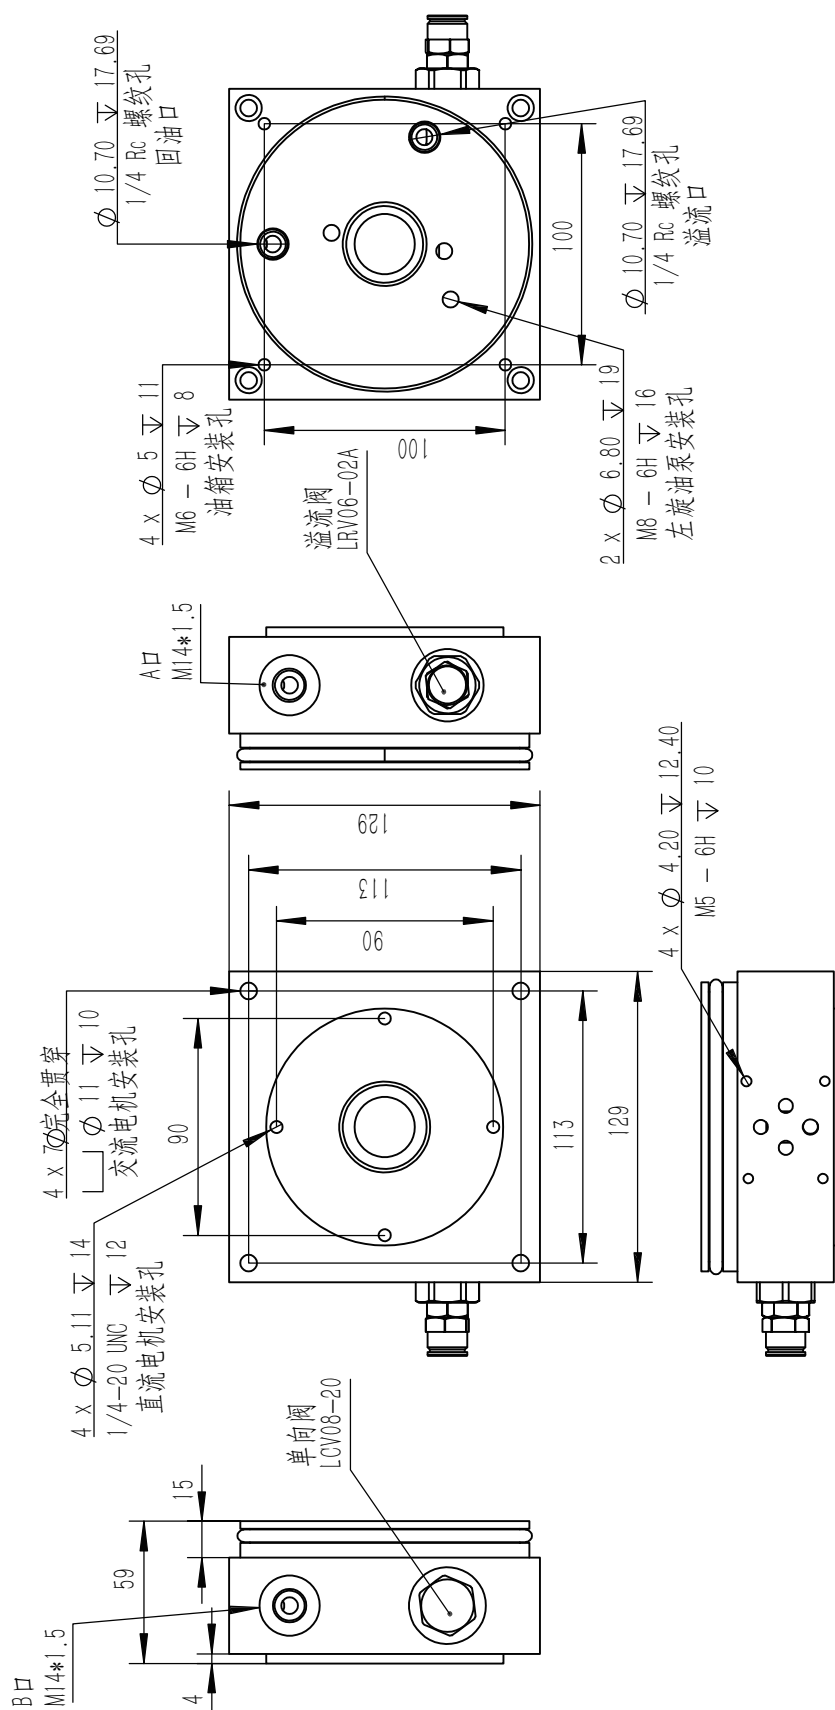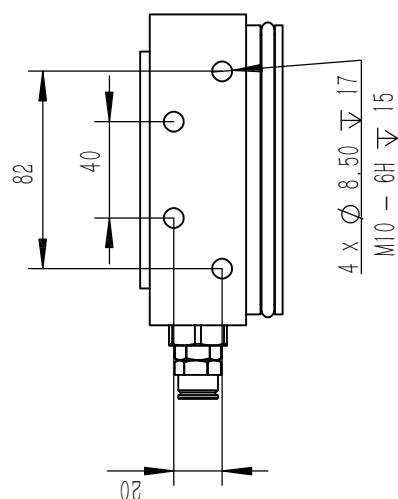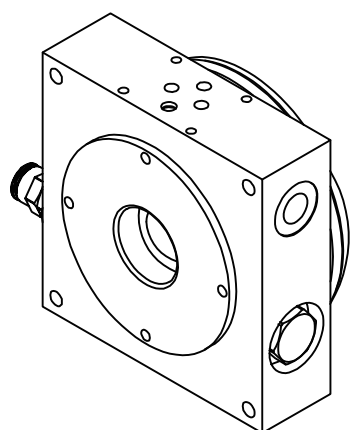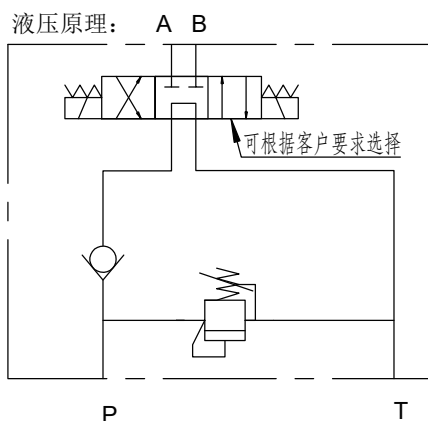

- 1、最大流量: 30LPM;
- 2、最大输入压力: 240bar;
- 3、油口尺寸: M14*1.5
- 4、阀要求工作油液清洁度: NAS 7。








升降阀组系列

Lift Valve Group Series

LZXK-SZY-02



液压原理:

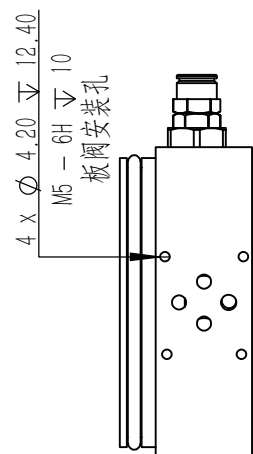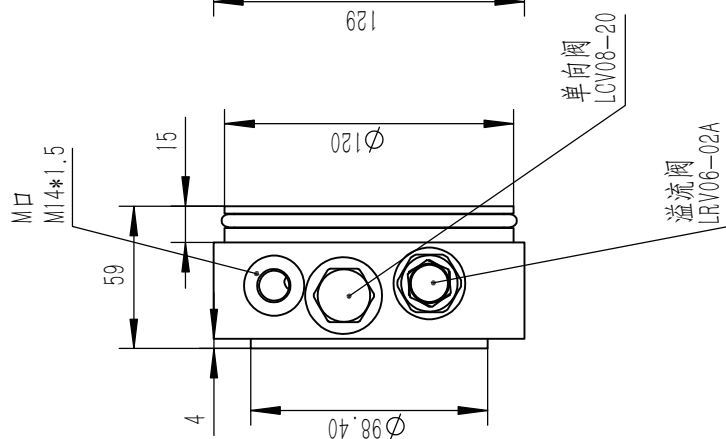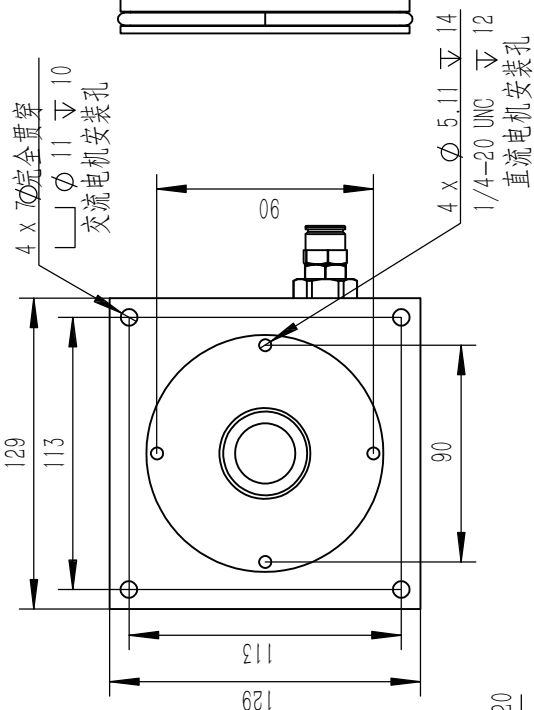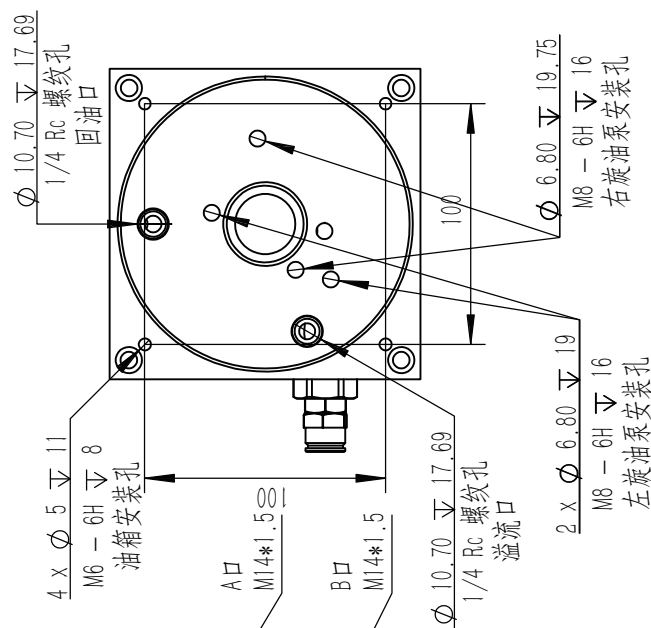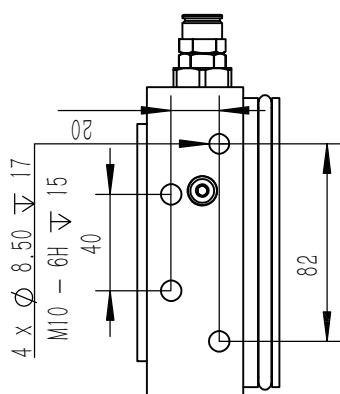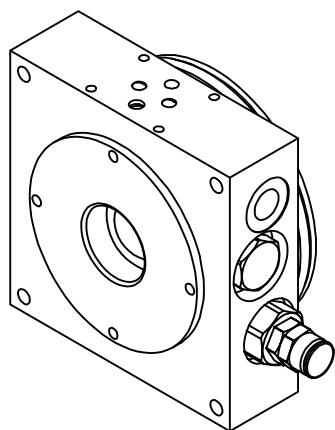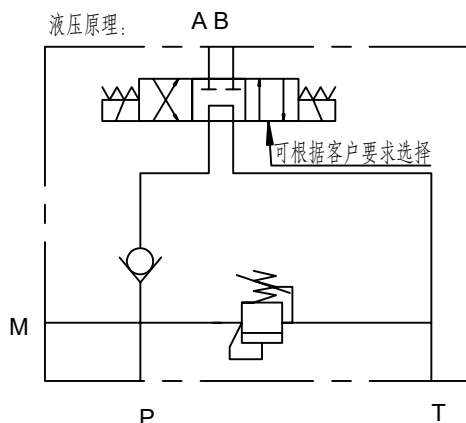

技术要求

- 1、最大流量: 30LPM;
- 2、最大输入压力: 240bar;
- 3、油口尺寸: M14*1.5
- 4、阀要求工作油液清洁度: NAS 7。






升降阀组系列

Lift Valve Group Series

LZXK-PT-G-3F



液压原理:

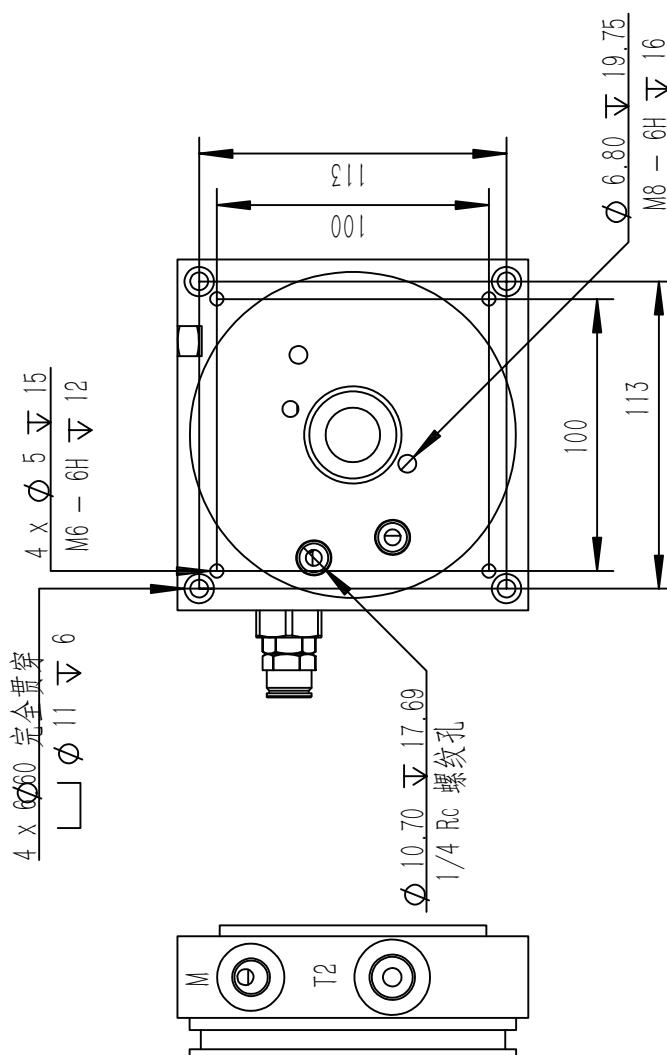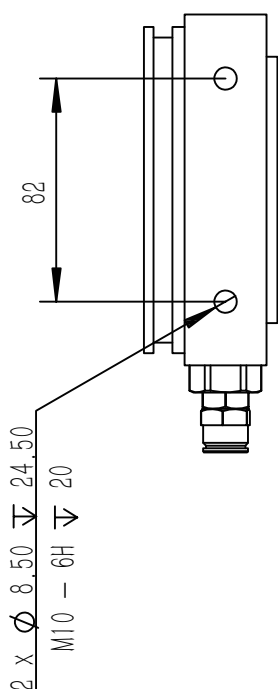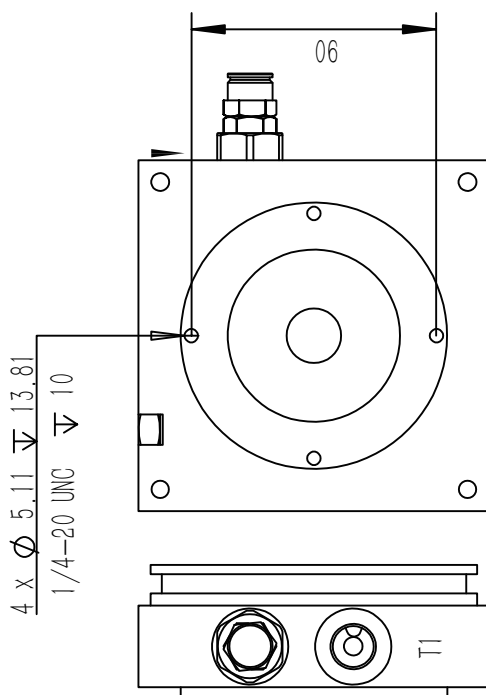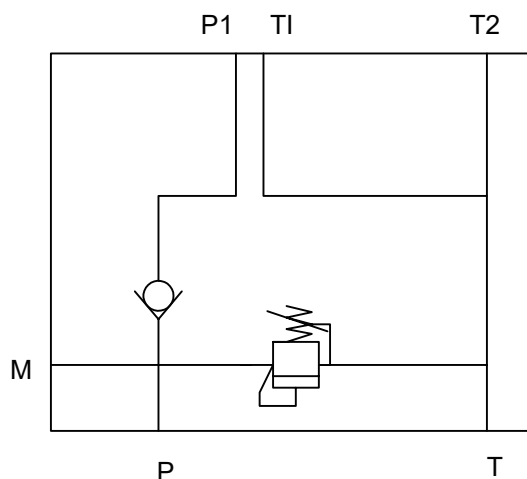

技术要求

- 1、最大流量: 30LPM;
- 2、最大输入压力: 240bar;
- 3、油口尺寸: P1/T1/T2为G3/8.M为M14*1.5
- 4、阀要求工作油液清洁度: NAS 7。








升降阀组系列

Lift Valve Group Series

LZXX-SZY-XL



液压原理:

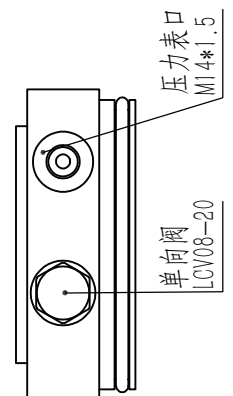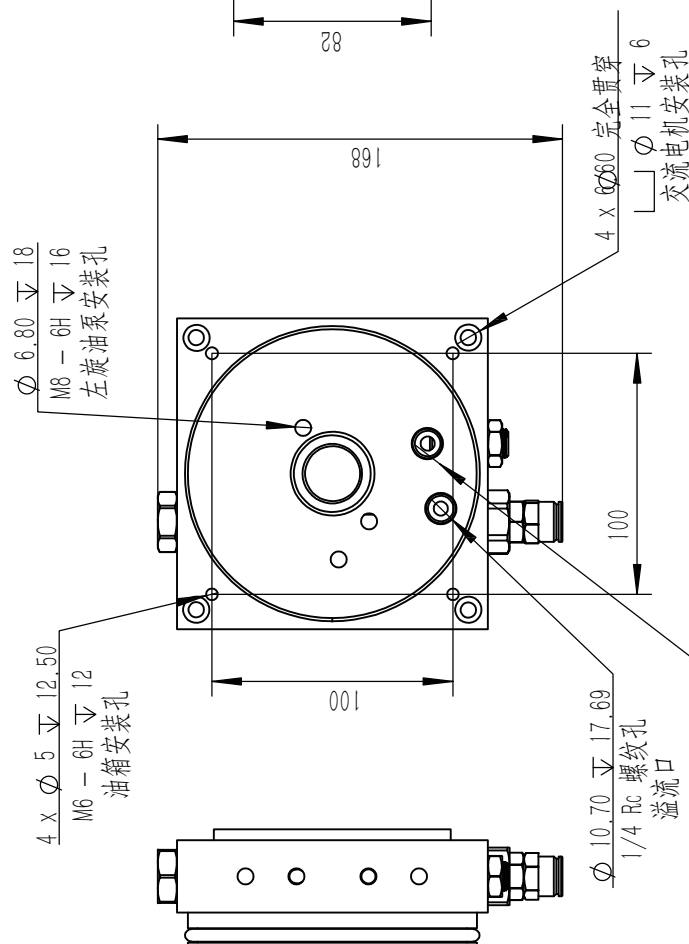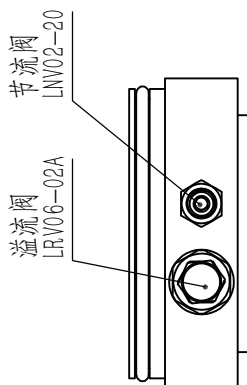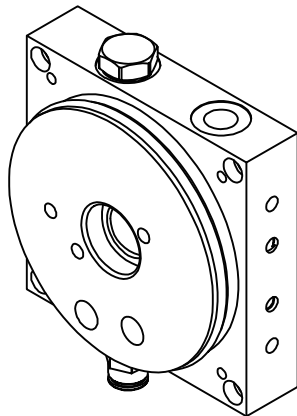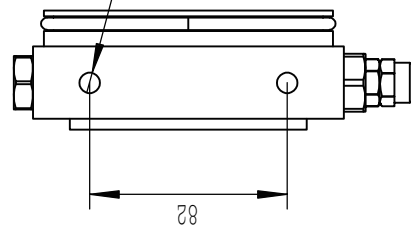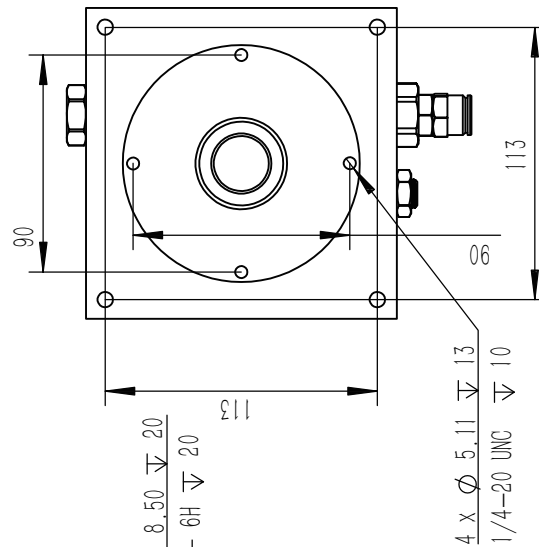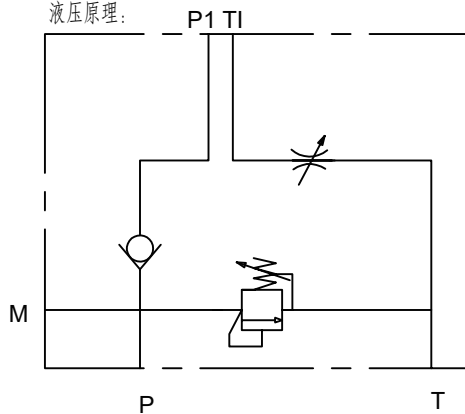

技术要求

- 1、最大流量: 30LPM;
- 2、最大输入压力: 240bar;
- 3、油口尺寸: M14*1.5
- 4、阀要求工作油液清洁度: NAS 7。

升降阀组系列

Lift Valve Group Series


L02-01L-M14



产品说明:

Product description:


本阀块需要配合LZXK-SZY-XL中心块使用。
This valve block needs to be used with the LZXK-SZY-XL center block.

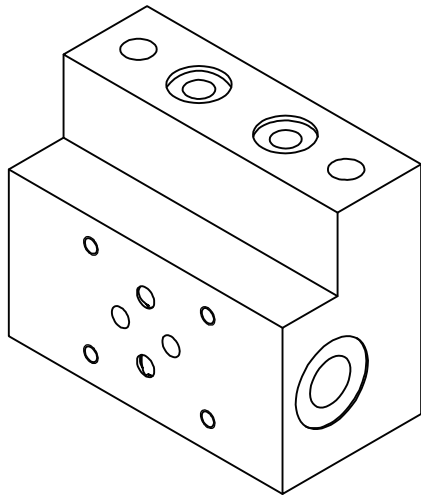

型号说明:

Model description:

L02-01L-M14



口径规格 Caliber specification






M14 M14*1.5

M16 M16*1.5

G2F G1/4

G3F G3/8

01L 1联

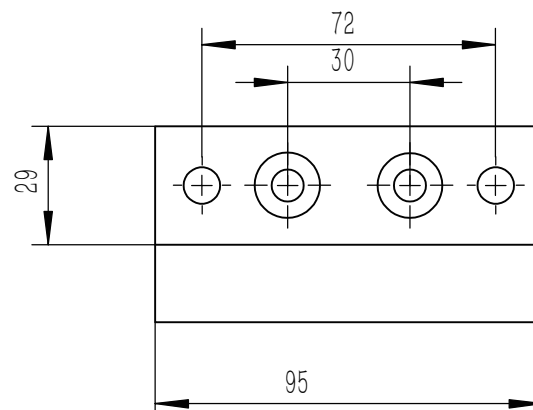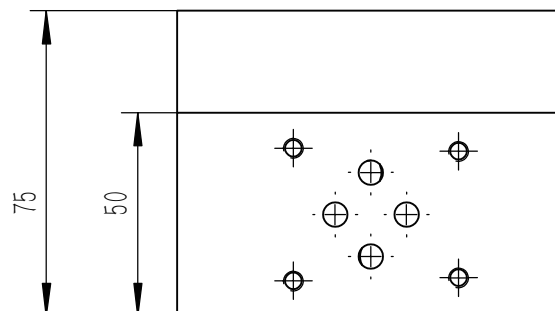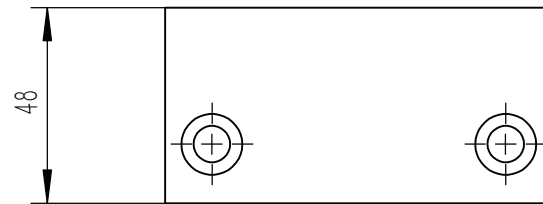

升降阀组系列

Lift Valve Group Series

L02-02L-M14



产品说明:

Product description:

本阀块需要配合LZXK-SZY-XL中心块使用。

This valve block needs to be used with the LZXK-SZY-XL center block.

型号说明:

Model description:

L02-02L-M14

02L 2联	口径规格 Caliber specification
03L 3联	M14 M14*1.5
04L 4联	M16 M16*1.5
05L 5联	G2F G1/4
	G3F G3/8

