

# 东莞市捷森电子有限公司

DONGGUAN J. S ELECTRONICS CO., LTD


Fixed inductors for surface mounting

## ACM-7060S SERIES


### FEATURES/特点

- High common mode impedance at high frequency effects excellent noise suppression performance;
- ACM series realizes small size and low profile;
- The products contain no lead and also support lead - free soldering;
- Common mode noise suppression of signal lines in high speed and high density digital equipment such as personal computers and peripherals.
- Test Frequency 100MHz/0.5V

### DIMENSIONS(mm) 外型尺寸

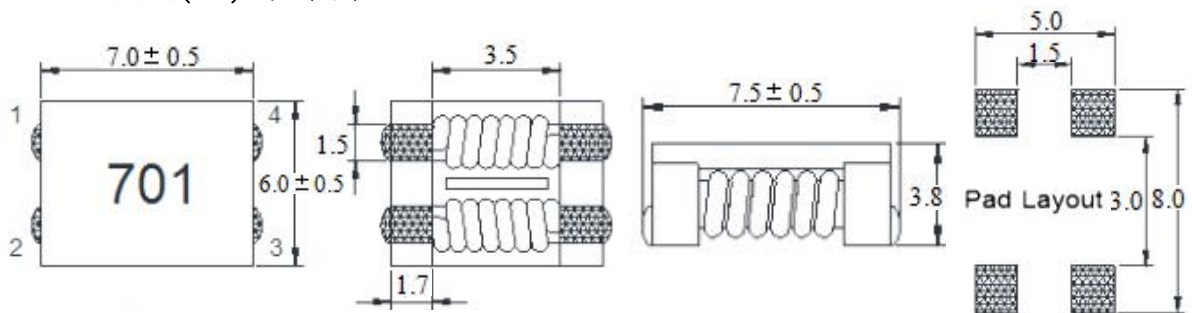

### CIRCUIT DIAGRAM / 电路图



Type 型号	Indicate 表示	Common mode Impedance 共模阻抗 (Ω)		Rated Voltage 额定电压 (V) MAX	D. C. R (Max) 直流电阻 (mΩ)	Rated Current 额定电流 (A)
ACM-7060S-400	400	40 Min	70 (Typ)	125	5	15.0
ACM-7060S-101	101	100 Min	140 (Typ)	125	10	9.0
ACM-7060S-301	301	225 Min	300 (Typ)	125	10	5.0
ACM-7060S-501	501	275 Min	450 (Typ)	125	10	5.0
ACM-7060S-601	601	500 Min	700 (Typ)	125	15	4.0
ACM-7060S-701	701	500 Min	700 (Typ)	125	15	4.0
ACM-7060S-102	102	800 Min	1020 (Typ)	125	17	3.0
ACM-7060S-132	132	910 Min	1300 (Typ)	125	21	2.5
ACM-7060S-272	272	2000 Min	2700 (Typ)	125	63	1.0
ACM-7060S-302	302	2500 Min	3000 (Typ)	125	75	0.9

- Design according to customer requirements.
- Data recorded for reference only, all to provide samples of business shall prevail.
- Recorded content may be improved or changed without notice.