

SPECIFICATION		PAGE	1/3
PART NUMBER :	TDC572026	REV.	A

SPECIFICATION

PART NO: TDC572026

【Approval Stamp Column 】

Customer :



STODA Technologies(Shantou)LTD

Tel : 0754-89918282

Website: [www.stodatech.com](http://www.stodatech.com)

Email: [sales@stodatech.com](mailto:sales@stodatech.com)

Address: Huanshi east road, Chen nan street , Chaoyang , Shan tou, Guang dong P.R.C

SPECIFICATION		PAGE	2/3
---------------	--	------	-----

PART NUMBER :	TDC572026	REV.	A
---------------	-----------	------	---

1: PHYSICAL DIMENSION

BEFORE COATING


OUTSIDE DIAMETER	(OD)	:	57.15	mm	MAX
INSIDE DIAMETER	(ID)	:	35.56	mm	MIN
HEIGHT	(HT)	:	13.97	mm	MAX

AFTER COATING :

OUTSIDE DIAMETER	(OD)	:	58.04	mm	MAX
INSIDE DIAMETER	(ID)	:	34.75	mm	MIN
HEIGHT	(HT)	:	14.86	mm	MAX


2: CORE MAGNETIC PARAMETERS

EFFECTIVE MAGNETIC PATH LENGTH	(L <sub>e</sub> )	:	14.296	cm
EFFECTIVE CROSS SEPCION AREA	(A <sub>e</sub> )	:	1.44	cm <sup>2</sup>
EFFECTIVE VOLUME	(V <sub>e</sub> )	:	20.70	cm <sup>3</sup>

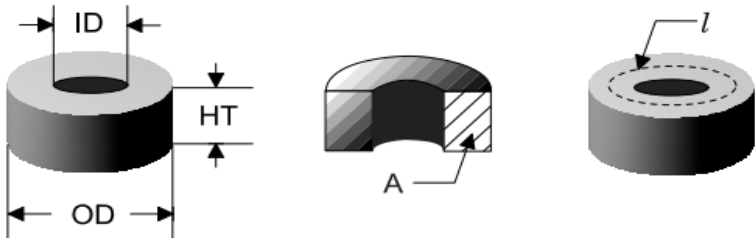

3: DC BIASED INDUCTANCE


H <sub>DC</sub>	:	200	Oe
PERCENT INITIAL PERM(NOM)	:	76.98%	
PERCENT INITIAL PERM(MIN. )	:	70.82%	

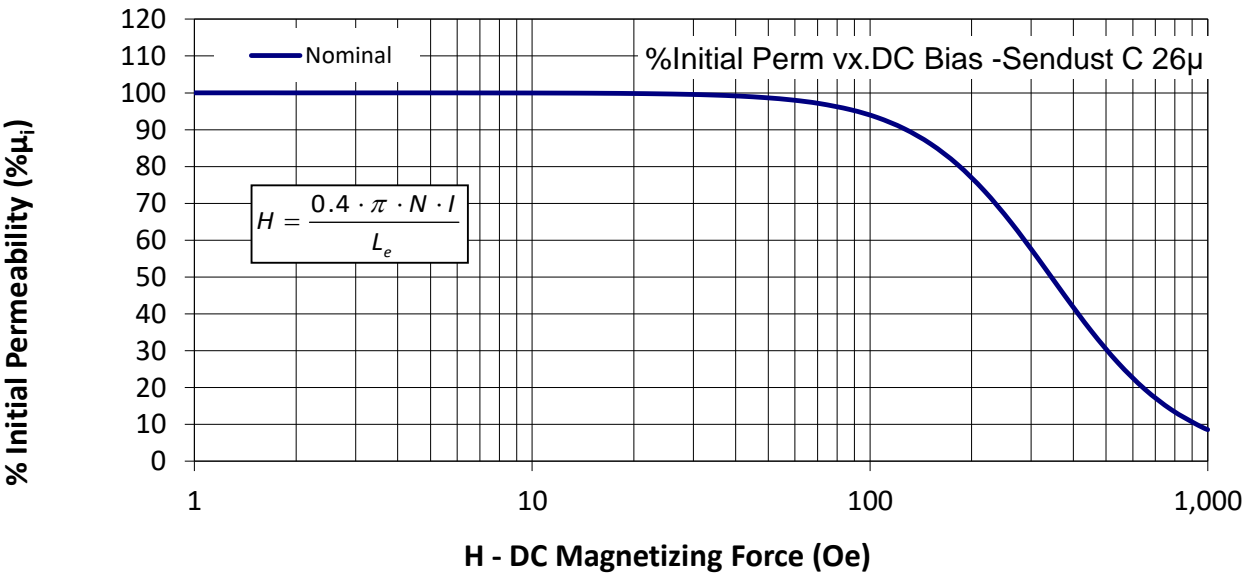

PART NUMBER :	TDC572026	REV.	A
---------------	-----------	------	---

#### 4: CORE LOSS

$B_{pk}$  : 500 G  
 FREQUENCY : 100 kHz  
 CORE LOSS (NOMINAL) : 178 mW/cm<sup>3</sup>  
 CORE LOSS (MAXIMUM) : 250 mW/cm<sup>3</sup>

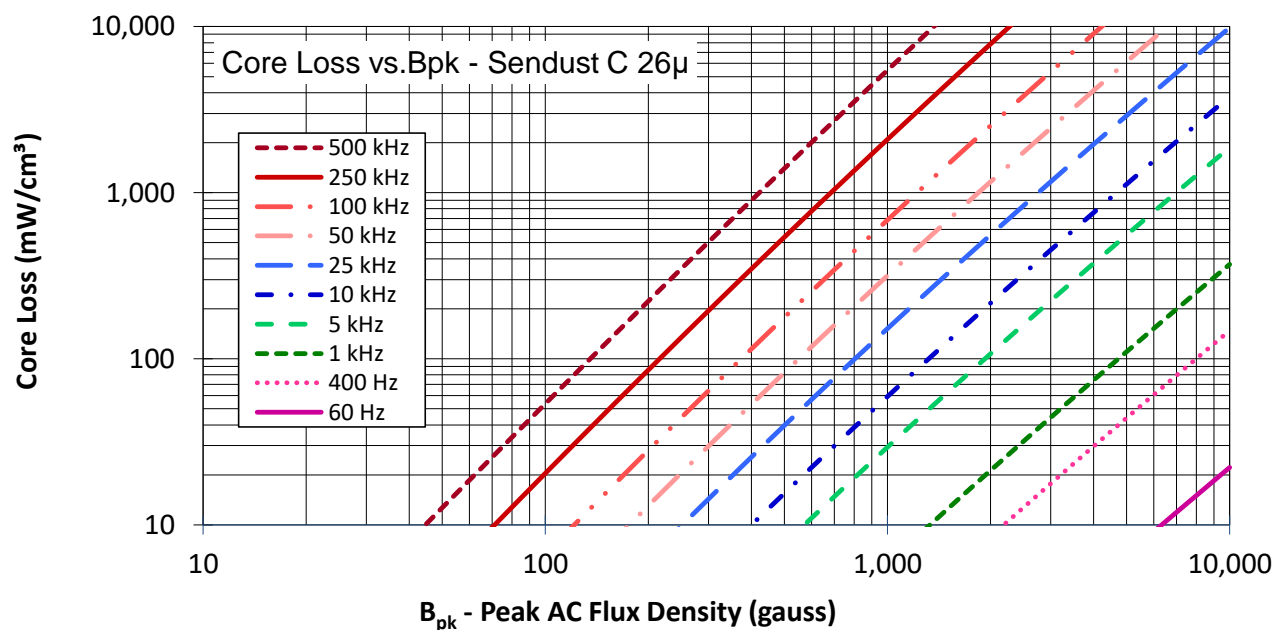

#### 5: INDUCTANCE

$\mu_i$  (REFERENCE) : 26  
 AL VALUE (NOMINAL) : 33 nH/N<sup>2</sup>  
 FREQUENCY : 10kHz  
 VOLTAGE ON TH2829A : 0.29V  
 AL TOLERANCE :  $\pm 8\%$   
 TEST INSTRUMENT : TH2829A

#### 6: COATING/PACKAGE

COATING TYPE : Blue Epoxy  
 VOLTAGE BREAKDOWN (MIN.) : 1000 Vrms  
 LIMIT : 0.1 mA, 5 s  
 PACKAGE QUANTITY : 80 Pcs/Box

#### 7: MATERIAL DESCRIPTION

FALSE

REVISION HISTORY			PREPARED	CHECKED	APPROVED
REV.	DESCRIPTION	DATE			
A	FIRST ISSUE	2022/6/8	